



Accretion Mechanics of Nonlinear Elastic Circular Cylindrical Bars Under Finite Torsion

Arash Yavari^{1,2} · Satya Prakash Pradhan¹

Received: 11 August 2022 / Accepted: 7 November 2022
© The Author(s), under exclusive licence to Springer Nature B.V. 2022

Abstract

In this paper we formulate the initial-boundary value problem of accreting circular cylindrical bars under finite torsion. It is assumed that the bar grows as a result of printing stress-free cylindrical layers on its boundary while it is under a time-dependent torque (or a time-dependent twist) and is free to deform axially. In a deforming body, accretion induces eigenstrains, and consequently residual stresses. We formulate the anelasticity problem by first constructing the natural Riemannian metric of the growing bar. This metric explicitly depends on the history of deformation during the accretion process. To simplify the kinematics, we consider incompressible solids. For the example of incompressible neo-Hookean solids, we solve the governing equations numerically. We also linearize the governing equations and compare the linearized solutions with the numerical solutions of the neo-Hookean bars.

Keywords Accretion mechanics · Surface growth · Finite torsion · Nonlinear elasticity · Residual stress · Geometric mechanics

Mathematics Subject Classification 74B20 · 74A05 · 74G05 · 74F99

1 Introduction

There are many examples of structures built by accretion in nature (formation of planetary objects, volcanic and sedimentary rock formation, the growth of biological tissues, etc.) and engineering applications (built up of concrete dams in successive layers, solidification of metals, electrolytic deposition, thermal and laser-based 3D printing, etc.). The first theoretical study of accretion mechanics was an analysis of thick-walled cylinders manufactured by wire winding of an initial elastic tube by Southwell [31]. As examples of notable subsequent contributions one can mention [3, 5, 7, 8, 18, 21, 30]. In recent years there has been a renewed interest in the mechanics of accretion, and specifically the large

✉ A. Yavari
arash.yavari@ce.gatech.edu

¹ School of Civil and Environmental Engineering, Georgia Institute of Technology, Atlanta, GA 30332, USA

² The George W. Woodruff School of Mechanical Engineering, Georgia Institute of Technology, Atlanta, GA 30332, USA

deformation analysis of accreting bodies. There are several works in the recent literature [1, 2, 4, 11, 14–17, 19, 24, 32–34, 38, 42, 51–53]. For detailed reviews of the mechanics of accretion see [22] and [32].

In classical finite elasticity, a body has a fixed reference configuration and motion is a time-dependent map from the reference configuration to the ambient space. For growing bodies the notion of reference configuration needs to be modified. There are two types of growth: bulk and surface growth. For a body undergoing bulk growth material points are fixed but their relaxed (natural) states change due to growth. In the literature this has been modeled using a multiplicative decomposition of deformation gradient into elastic and growth parts: $\mathbf{F} = \overset{e}{\mathbf{F}}\overset{g}{\mathbf{F}}$.¹ Geometrically, in bulk growth the reference configuration is a Riemannian manifold $(\mathcal{B}, \mathbf{G}_t)$, where \mathcal{B} is a fixed 3-manifold that is equipped with a time-dependent Riemannian metric \mathbf{G}_t , [43].² For a body undergoing growth on its boundary (or a subset of its boundary) while in motion, the reference configuration is a time-dependent set \mathcal{B}_t . Material (stress-free or pre-stressed) can be either added (accretion) or removed (ablation) from the boundary. The natural configuration of the growing body depends on its initial natural configuration (the natural configuration before accretion started) and the state of deformation at the time of attachment of new material points. Accretion induces residual stress, in general.³ This is due to the non-flatness of the material metric. A geometric analysis of finite deformations of accreting bodies was presented in [32, 33]. Recently, Yavari et al. [51] formulated and solved the nonlinear initial-boundary value problem of accreting circular cylindrical bars under finite extension. In this paper we analyze circular cylindrical shafts that undergo finite torsion, are free to deform axially, and are simultaneously growing symmetrically. The classical analogue of this problem (without accretion) has been studied extensively in the literature and is a subset of Family 3 universal deformations [9], see Remark 3.2.

This paper is organized as follows. In §2, we tersely review some elements of Riemannian geometry and the nonlinear mechanics of accretion. In §3, the nonlinear accretion problem of a circular cylindrical shaft that is under finite torsion while it is free to deform axially is formulated. The natural configuration (material manifold) of the growing shaft is constructed, and stresses and residual stresses are calculated assuming that during the accretion process either a time-dependent applied torque or a time-dependent twist per unit length is given. Several numerical examples are solved and discussed. The kinematics, stresses, and residual stresses are calculated in the setting of linear accretion mechanics. The linear and nonlinear solutions are compared in a numerical example. Conclusions are given in §4.

2 Nonlinear Mechanics of Accretion

In this section, we briefly review some elements of Riemannian geometry, nonlinear elasticity and anelasticity, and accretion mechanics. For more detailed discussions, see [20, 33, 43, 45].

¹This decomposition is due to Kondaurov and Nikitin [13], Takamizawa and Hayashi [36], Takamizawa and Matsuda [37], and Takamizawa [35]. One can find similar ideas in [39, 40]. This decomposition was popularized in the literature of biomechanics by Rodriguez et al. [26]. For a historical account of this decomposition in different fields see [27, 50].

²Growing bodies are non-Euclidean in the sense that their natural configuration is not Euclidean, in general. Non-Euclidean solids—a term that was coined by Henri Poincaré [25]—has been used interchangeably for anelastic bodies in the recent literature [42, 52, 53].

³This was first observed in the setting of linear accretion mechanics in the seminal work of Brown and Goodman [5] who studied accreting planets under self-gravity.

Riemannian Geometry Let us consider a smooth n -manifold \mathcal{B} (this is identified with the body in its reference configuration). Its tangent space at a point $X \in \mathcal{B}$ is denoted $T_X\mathcal{B}$. Let \mathcal{S} be another n -manifold (this is the Euclidean ambient space) and $\varphi : \mathcal{B} \rightarrow \mathcal{S}$ a smooth and invertible mapping (this is the deformation mapping). A smooth vector field \mathbf{W} on \mathcal{B} at every $X \in \mathcal{B}$ assigns a vector \mathbf{W}_X such that $X \mapsto \mathbf{W}_X \in T_X\mathcal{B}$ varies smoothly. For \mathbf{W} a vector field on \mathcal{B} , $\varphi_*\mathbf{W} = T\varphi \cdot \mathbf{W} \circ \varphi^{-1}$ is a vector field on $\mathcal{C} = \varphi(\mathcal{B}) \subset \mathcal{S}$ —the push-forward of \mathbf{W} by φ . Similarly, if \mathbf{w} is a vector field on $\mathcal{C} = \varphi(\mathcal{B})$, the pull-back of \mathbf{w} by φ is defined as $\varphi^*\mathbf{w} = T(\varphi^{-1}) \cdot \mathbf{w} \circ \varphi$, which is a vector field on \mathcal{B} . The derivative map of φ is denoted by $\mathbf{F} = T\varphi$, and is a two-point tensor. When φ is a deformation map, \mathbf{F} has traditionally been called deformation gradient in the finite elasticity literature. One should note that \mathbf{F} (unlike the gradient operator) is metric independent. It has the following representation

$$\mathbf{F} = F^a{}_A \frac{\partial}{\partial x^a} \otimes dX^A, \quad F^a{}_A = \frac{\partial \varphi^a}{\partial X^A}, \tag{2.1}$$

where $\{X^A\}$ and $\{x^a\}$ are local coordinate charts for \mathcal{B} and \mathcal{S} , respectively. Note that $\{\frac{\partial}{\partial x^a}\}$ is a basis for $T_x\mathcal{C}$ ($x = \varphi(X)$) and $\{dX^A\}$ is a basis for $T_X^*\mathcal{B}$, the co-tangent space, i.e., the dual space of $T_X\mathcal{B}$, or the space of 1-forms. The push-forward and pull-back of vectors have the coordinate representations $(\varphi_*\mathbf{W})^a = F^a{}_A W^A$, and $(\varphi^*\mathbf{w})^A = (F^{-1})^A{}_a w^a$. A $\binom{0}{2}$ -tensor at $X \in \mathcal{B}$ is a bilinear map $\mathbf{T} : T_X\mathcal{B} \times T_X\mathcal{B} \rightarrow \mathbb{R}$, and in a local coordinate chart $\{X^A\}$ for \mathcal{B} one has $\mathbf{T}(\mathbf{U}, \mathbf{W}) = T_{AB} U^A W^B$, where \mathbf{U} and \mathbf{W} are vectors, i.e., are elements of $T_X\mathcal{B}$. Let \mathcal{B} be a smooth manifold that is equipped with an inner product \mathbf{G}_X on the tangent space $T_X\mathcal{B}$. Assume that \mathbf{G}_X varies smoothly, i.e., if \mathbf{U} and \mathbf{W} are vector fields on \mathcal{B} , then $X \mapsto \mathbf{G}_X(\mathbf{U}_X, \mathbf{W}_X) = \langle\langle \mathbf{U}_X, \mathbf{W}_X \rangle\rangle_{\mathbf{G}_X}$, where $\langle\langle \cdot, \cdot \rangle\rangle_{\mathbf{G}_X}$ is the inner product induced by the metric \mathbf{G}_X , is a smooth function. In this case $(\mathcal{B}, \mathbf{G})$ is called a Riemannian manifold.

For two Riemannian manifolds $(\mathcal{B}, \mathbf{G})$ and $(\mathcal{C}, \mathbf{g})$, and for a diffeomorphism (a smooth map with smooth inverse) $\varphi : \mathcal{B} \rightarrow \mathcal{C}$, push-forward of the metric \mathbf{G} is denoted by $\varphi_*\mathbf{G}$. It is a metric on $\mathcal{C} = \varphi(\mathcal{B})$, and is defined as

$$\langle\langle \mathbf{u}_x, \mathbf{w}_x \rangle\rangle_{(\varphi_*\mathbf{G})_x} = \langle\langle (\varphi^*\mathbf{u})_X, (\varphi^*\mathbf{w})_X \rangle\rangle_{\mathbf{G}_X}, \tag{2.2}$$

where $x = \varphi(X)$. In components, $(\varphi_*\mathbf{G})_{ab} = (F^{-1})^A{}_a (F^{-1})^B{}_b G_{AB}$. The pull-back of the metric \mathbf{g} is a metric in $\varphi^{-1}(\mathcal{C}) = \mathcal{B}$, and is denoted by $\mathbf{C}^\flat = \varphi^*\mathbf{g}$ —the right Cauchy-Green strain. It is defined as

$$\langle\langle \mathbf{U}_X, \mathbf{W}_X \rangle\rangle_{(\varphi^*\mathbf{g})_X} = \langle\langle (\varphi_*\mathbf{U})_x, (\varphi_*\mathbf{W})_x \rangle\rangle_{\mathbf{g}_x}, \quad (\varphi^*\mathbf{g})_{AB} = F^a{}_A F^b{}_B g_{ab}. \tag{2.3}$$

If $\mathbf{G} = \varphi^*\mathbf{g}$, or equivalently, $\mathbf{g} = \varphi_*\mathbf{G}$, φ is called an isometry and the Riemannian manifolds $(\mathcal{B}, \mathbf{G})$ and $(\mathcal{C}, \mathbf{g})$ are isometric.

Kinematics In an accretion process, the material manifold that represents the growing body is time dependent; new material points are attached to part of the boundary of the body that we call the *growth surface*. Let us identify the accreting body with a time-dependent 3-manifold \mathcal{B}_t . The *initial body* is denoted by $\mathcal{B} = \mathcal{B}_0$. Accretion occurs in a time interval $[0, t_a]$. We follow [33] and define an accreting body to be a 3-manifold \mathcal{M} —the *material ambient space*—that is embedded in the Euclidean ambient space along with a smooth *time of attachment map* $\tau : \mathcal{M} \rightarrow [0, t_a]$.⁴ Note that for all points in the initial body \mathcal{B} , $\tau(X) = 0$. The body at time t , \mathcal{B}_t , is defined as

$$\mathcal{B}_t = \{X \in \mathcal{M} \mid \tau(X) \leq t\}. \tag{2.4}$$

⁴The idea of a time of attachment map is due to Metlov [21].

Note that the growth surface at time t is given as $\Omega_t = \tau^{-1}(t)$. For an accreting body, motion is a time-dependent map $\varphi_t : \mathcal{B}_t \rightarrow \mathcal{S}$, $t \in [0, t_a]$, where \mathcal{S} is the Euclidean ambient space. Consider the map $\bar{\varphi} : \mathcal{M} \rightarrow \mathcal{S}$ defined as $\bar{\varphi}(X) = \varphi(X, \tau(X))$. For points in the initial body $\bar{\varphi}(X) = X$. For a point X in the *secondary body* $\mathcal{B}_t \setminus \mathcal{B}_0$, $\bar{\varphi}(X)$ is the placement of X at its time of attachment. Notice that for each layer Ω_t , $\bar{\varphi}|_{\Omega_t} = \varphi_t|_{\Omega_t}$ because for $\tau(X) = t$, $\bar{\varphi}(X) = \varphi(X, t)$. This implies that $\bar{\varphi}$ records the placement of the deformed configuration $\omega_t = \varphi_t(\Omega_t) = \bar{\varphi}(\Omega_t)$ of the layer Ω_t at its time of attachment. It should be noted that the map $\bar{\varphi}$ is not one-to-one, in general. In other words, $\bar{\varphi}$ is not a deformation mapping. $T\bar{\varphi}$ need not be injective either.

Deformation gradient is the derivative of $\varphi_t : \mathcal{B}_t \rightarrow \mathcal{S}$, see (2.1). The *frozen deformation gradient* is defined as $\bar{\mathbf{F}}(X) = \mathbf{F}(X, \tau(X))$; it is the deformation gradient of point X at its time of attachment $\tau(X)$. It can be shown that $T\bar{\varphi} = \bar{\mathbf{F}} + \mathbf{V} \otimes d\tau$, where $\mathbf{V}(X, t) = \frac{\partial}{\partial t} \varphi(X, t)$ is the material velocity. The frozen deformation gradient $\bar{\mathbf{F}}(X)$ is compatible on each single layer Ω_t . However, it is not the tangent map of any embedding; $\bar{\mathbf{F}}$ is incompatible, in general. In accreting bodies, the incompatibility of the frozen deformation gradient is the source of anelasticity, and hence residual stresses [33].

The growth surface in the deformed configuration $\omega_t = \varphi_t(\Omega_t)$ is that part of the deformed boundary where new material points are added. The growth velocity is a vector field \mathbf{u}_t on ω_t that describes the rate and direction at which new material points are being added to the boundary. The material growth velocity \mathbf{U}_t describes the time evolution of the layers Ω_t in the material ambient space. It turns out that \mathbf{U}_t , and consequently the material motion, is not unique. In other words, there is some freedom in choosing \mathbf{U}_t , and all these equivalent \mathbf{U}_t 's lead to isometric material manifolds [33]. Natural distances in the material manifold are measured using a material metric \mathbf{G} . This metric is not known a priori in accretion problems; it depends on the state of deformation of the body during the accretion process. It is determined after solving the accretion initial-boundary-value problem. The *accretion tensor* \mathbf{Q} is a time-independent two-point tensor that is defined as

$$\mathbf{Q}(X) = \bar{\mathbf{F}}(X) + [\mathbf{u}(\bar{\varphi}(X), \tau(X)) - \bar{\mathbf{F}}(X)\mathbf{U}(X)] \otimes d\tau(X), \quad X \in \mathcal{M}. \tag{2.5}$$

Because $\langle d\tau, \mathbf{U} \rangle = 1$, $\mathbf{Q}\mathbf{U} = \mathbf{u}$. Notice that the accretion tensor \mathbf{Q} is not the tangent map of any embedding, although it is compatible on each single layer. Also note that, $\mathbf{Q}|_{\Omega} = \bar{\mathbf{F}}|_{\Omega} = T\bar{\varphi}|_{\Omega}$. The Euclidean metric of the ambient space is denoted by \mathbf{g} . The material metric of the accreting body is defined as the pull-back of the Euclidean ambient metric \mathbf{g} using \mathbf{Q} , i.e., $\mathbf{G}(X) = \mathbf{Q}^*(X)\mathbf{g}(\bar{\varphi}(X))\mathbf{Q}(X)$. In components, $G_{AB}(X) = Q^a{}_A(X)g_{ab}(\bar{\varphi}(X))Q^b{}_B(X)$. One can show that if the energy function W of the material is rank-one convex, and if the growth surface is traction-free, then $\bar{\mathbf{F}} = \mathbf{Q}$ [33].

Transpose of the deformation gradient $\mathbf{F}^T : T_x\mathcal{C} \rightarrow T_X\mathcal{B}$ is defined as $\langle \langle \mathbf{F}\mathbf{v}, \mathbf{v} \rangle \rangle_{\mathbf{g}} = \langle \langle \mathbf{V}, \mathbf{F}^T\mathbf{v} \rangle \rangle_{\mathbf{G}}$, $\forall \mathbf{V} \in T_X\mathcal{B}$, $\mathbf{v} \in T_x\mathcal{C}$. In components, $(F^T(X))^A{}_a = g_{ab}(x)F^b{}_B(X)G^{AB}(X)$. The right Cauchy-Green deformation tensor is defined as $\mathbf{C}(X) = \mathbf{F}^T(X)\mathbf{F}(X) : T_X\mathcal{B} \rightarrow T_X\mathcal{B}$, and in components, $C^A{}_B = (F^T)^A{}_a F^a{}_B$. Note that $\mathbf{C}^b = \varphi^*\mathbf{g}$ (b is the flat operator induced by the metric \mathbf{g}), and has components $C_{AB} = F^a{}_A F^b{}_B g_{ab} \circ \varphi$. The left Cauchy-Green deformation tensor is defined as $\mathbf{B}^\sharp = \varphi^*\mathbf{g}^\sharp$ (\sharp is the sharp operator induced by the metric \mathbf{g}), and has components $B^{AB} = (F^{-1})^A{}_a (F^{-1})^B{}_b g^{ab}$. The deformation tensors \mathbf{c}^b and \mathbf{b}^\sharp (the Finger deformation tensor) are the spatial analogues of \mathbf{C}^b and \mathbf{B}^\sharp , respectively, and are defined as

$$\begin{aligned} \mathbf{c}^b &= \varphi_*\mathbf{G}, & c_{ab} &= (F^{-1})^A{}_a (F^{-1})^B{}_b G_{AB}, \\ \mathbf{b}^\sharp &= \varphi_*\mathbf{G}^\sharp, & b^{ab} &= F^a{}_A F^b{}_B G^{AB}. \end{aligned} \tag{2.6}$$

It is straightforward to see that $b^{ac} c_{cb} = b^a_m c^m_b = \delta^a_b$, i.e., $\mathbf{b} = \mathbf{c}^{-1}$. The strain tensors \mathbf{C} and \mathbf{b} have the principal invariants I_1, I_2 , and I_3 , which are defined as [23]: $I_1 = \text{tr } \mathbf{b} = b^a_a = b^{ab} g_{ab}$, $I_2 = \frac{1}{2} (I_1^2 - \text{tr } \mathbf{b}^2) = \frac{1}{2} (I_1^2 - b^a_b b^b_a) = \frac{1}{2} (I_1^2 - b^{ab} b^{cd} g_{ac} g_{bd})$, and $I_3 = \det \mathbf{b}$.

Constitutive Equations For an isotropic hyperelastic solid, the energy function depends on deformation through the principal invariants: $W = W(X, I_1, I_2, I_3)$. For an incompressible ($I_3 = 1$) isotropic hyperelastic solid energy function only depends on I_1 and I_2 : $W = W(X, I_1, I_2)$. The X -dependence of the energy function models material inhomogeneity. In this paper, we restrict our calculations to homogeneous bodies. The Cauchy stress has the following representation [6, 28]

$$\boldsymbol{\sigma} = -p \mathbf{g}^\sharp + 2W_1 \mathbf{b}^\sharp - 2W_2 \mathbf{c}^\sharp, \quad \sigma^{ab} = -p g^{ab} + 2W_1 b^{ab} - 2W_2 c^{ab}, \quad (2.7)$$

where p is the Lagrange multiplier associated with the incompressibility constraint $J = \sqrt{I_3} = 1$, and $W_i = \frac{\partial W}{\partial I_i}$, $i = 1, 2$. Notice that \mathbf{b}^\sharp and \mathbf{c}^\sharp , and consequently $\boldsymbol{\sigma}$, explicitly depend on the material metric \mathbf{G} . It is assumed that the material points of the accreting body are isotropic in their relaxed configuration. However, in its current configuration the accreting body may not be isotropic.


Equilibrium Equations Accretion is usually a slow process, and hence one can ignore inertial effects. In the absence of body forces, the balance of linear momentum in local form, and in terms of the Cauchy stress, reads: $\text{div } \boldsymbol{\sigma} = \mathbf{0}$, where $\text{div} = \text{div}^\mathbf{g}$ is divergence with respect to the spatial metric. In components, one writes $(\text{div } \boldsymbol{\sigma})^a = \sigma^{ab}{}_{|b} = \frac{\partial \sigma^{ab}}{\partial x^b} + \sigma^{ac} \gamma^b_{cb} + \sigma^{cb} \gamma^a_{cb}$, where γ^a_{bc} is the Christoffel symbol of the Levi-Civita connection $\nabla^\mathbf{g}$ in the local coordinate chart $\{x^a\}$, and is defined as $\nabla^\mathbf{g}_{\partial_b} \partial_c = \gamma^a_{bc} \partial_a$. More explicitly, $\gamma^a_{bc} = \frac{1}{2} g^{ak} (g_{kb,c} + g_{kc,b} - g_{bc,k})$.

3 Torsion of an Accreting Circular Cylindrical Bar

In this section we formulate the initial-boundary value problem of symmetric accretion of a circular cylindrical bar made of an incompressible isotropic hyperelastic solid that is undergoing finite torsion while it is free to deform axially. In order to motivate the continuous accretion problem, let us first discuss a discrete accretion problem, which is a twist-fit problem [46]. Consider a circular cylindrical bar with radius R_1 that is finitely twisted, see Fig. 1. While the bar is twisted a cylindrical shell with thickness $R_2 - R_1$ is printed on its boundary cylinder. In other words, we start with a stress-free solid cylinder with radius R_2 , remove a concentric solid cylinder of radius R_1 , and replace it with the twisted bar with radius R_1 , and then glue them. After removal of external loads, the accreted bar is residually stressed. This is because the natural configurations of the core and the shell are incompatible. In the following, we will formulate the continuous analogue of this problem. We will calculate the metric of the natural configuration, the stress distribution during accretion, and the residual stress distribution after removal of the external loads.

Kinematics and the Material Metric Let us consider a circular cylindrical bar with initial length L and radius R_0 that is made of a homogeneous isotropic and incompressible material with energy function $W = W(I_1, I_2)$. We use the cylindrical coordinates (R, Θ, Z) in the reference configuration, and cylindrical coordinates (r, θ, z) in the current configuration.

Fig. 1 The twist-fit problem: A cylindrical bar is first twisted. In the deformed configuration, a stress-free cylindrical shell is printed on its cylinder boundary. When the accreted bar is released, the unloaded bar is residually stressed

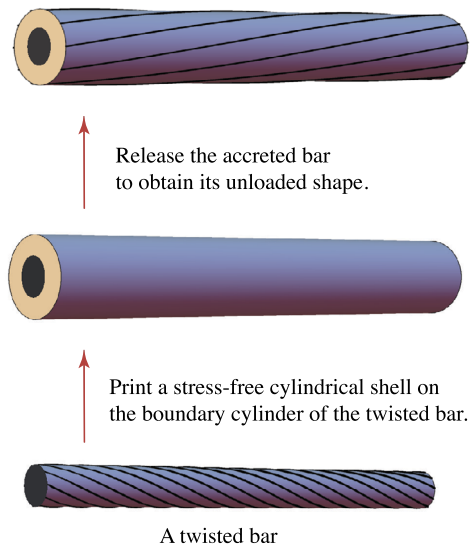

The metrics of the reference and current configurations have the following representations ($0 \leq R \leq R_0$)

$$\mathbf{G} = \begin{bmatrix} 1 & 0 & 0 \\ 0 & R^2 & 0 \\ 0 & 0 & 1 \end{bmatrix}, \quad \mathbf{g} = \begin{bmatrix} 1 & 0 & 0 \\ 0 & r^2 & 0 \\ 0 & 0 & 1 \end{bmatrix}. \tag{3.1}$$

Let us consider a time-dependent torsion of the circular cylindrical bar such that it is slow enough for the inertial effects to be negligible. Torsion of circular cylindrical bars is a subset of Family 3 deformations that are universal for incompressible isotropic solids [9], and have the following form⁵

$$r = r(R, t), \quad \theta = \Theta + \psi(t)Z, \quad z = \lambda^2(t)Z, \tag{3.2}$$

where $\psi(t)$ is twist per unit length, and $\lambda^2(t)$ is the axial stretch, see Fig. 2. Under a twist-control loading $\psi(t)$ is given while $\lambda(t)$ needs to be calculated. Under a torque-control loading the applied torque is given while both $\psi(t)$ and $\lambda(t)$ are unknown functions to be determined. In the numerical examples we will consider both cases. The deformation gradient reads


$$\mathbf{F} = \mathbf{F}(R, t) = \begin{bmatrix} r'(R, t) & 0 & 0 \\ 0 & 1 & \psi(t) \\ 0 & 0 & \lambda^2(t) \end{bmatrix}, \tag{3.3}$$

where $r'(R, t) = \frac{\partial r(R, t)}{\partial R}$. The incompressibility condition is written as

$$J = \sqrt{\frac{\det \mathbf{g}}{\det \mathbf{G}}} \det \mathbf{F} = \frac{\lambda^2(t) r(R, t) r'(R, t)}{R} = 1. \tag{3.4}$$

⁵Family 3 deformations are universal for certain inhomogeneous and anisotropic bars as well [44, 47, 48]. In this paper, we restrict our calculations to isotropic and homogeneous bars.

Fig. 2 An accreting circular cylindrical bar undergoing finite torsion while it is free to deform axially. (a) The initial bar, (b) the accreting bar at time t , and (c) the residually-stressed accreted bar after the completion of accretion and removal of the external forces

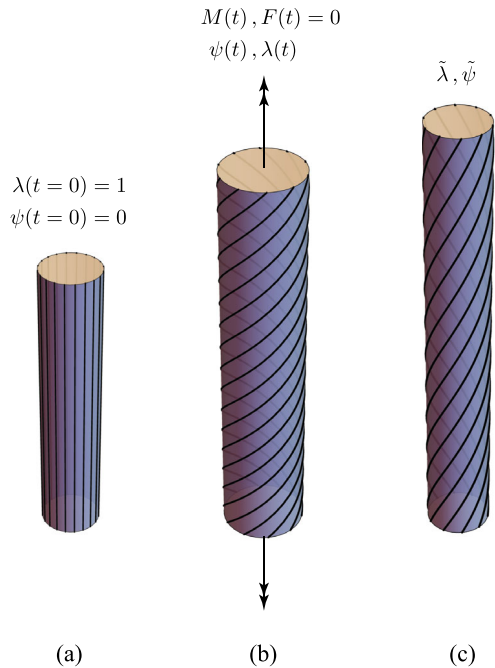

This condition, together with $r(0, t) = 0$, gives us

$$r(R, t) = \frac{R}{\lambda(t)}, \quad 0 \leq R \leq R_0. \tag{3.5}$$

We assume that while the cylindrical bar is under the time-dependent deformation (3.2) cylindrical layers of stress-free material are printed continuously on its boundary (see Fig. 3). The growth velocity is assumed to be normal to the boundary in the current configuration and has magnitude $u_g(t)$. This means that in the time interval $[t, t + dt]$ a stress-free circular cylindrical shell of thickness $u_g(t)dt$ is attached to the deformed body. We also assume that this accretion process is continuous in the time interval $t \in [0, t_a]$. Let us assign a time of accretion $\tau(R)$ to each layer with the radial coordinate R in the reference configuration. For $0 \leq R \leq R_0$, $\tau(R) = 0$. We assume that there is no ablation during the accretion process, and hence $\tau(R)$ is invertible for $R > R_0$. Its inverse is denoted as $s = \tau^{-1}$, and it assigns to the time t the radial coordinate of the accreted cylinder in the reference configuration. The growth surfaces in the reference and the current configurations are defined as

$$\begin{aligned} \Omega_t &= \{(s(t), \Theta, Z) : 0 \leq \Theta < 2\pi, 0 \leq Z \leq L\}, \\ \omega_t &= \{(r(s(t), t), \Theta + \psi(t)Z, \lambda^2(t)Z) : 0 \leq \Theta < 2\pi, 0 \leq Z \leq L\}. \end{aligned} \tag{3.6}$$

Note that

$$\frac{d}{dt}r(s(t), t) = \frac{\partial r}{\partial R}(s(t), t)\dot{s}(t) + \frac{\partial r}{\partial t}(s(t), t) = r'(s(t), t) U_g(t) + V^r(s(t), t), \tag{3.7}$$

where $U_g(t) = \dot{s}(t)$, and $V^r = \frac{\partial r}{\partial t}$ is the radial component of the material velocity on the growth surface. In the absence of accretion, the spatial velocity of the material points lying

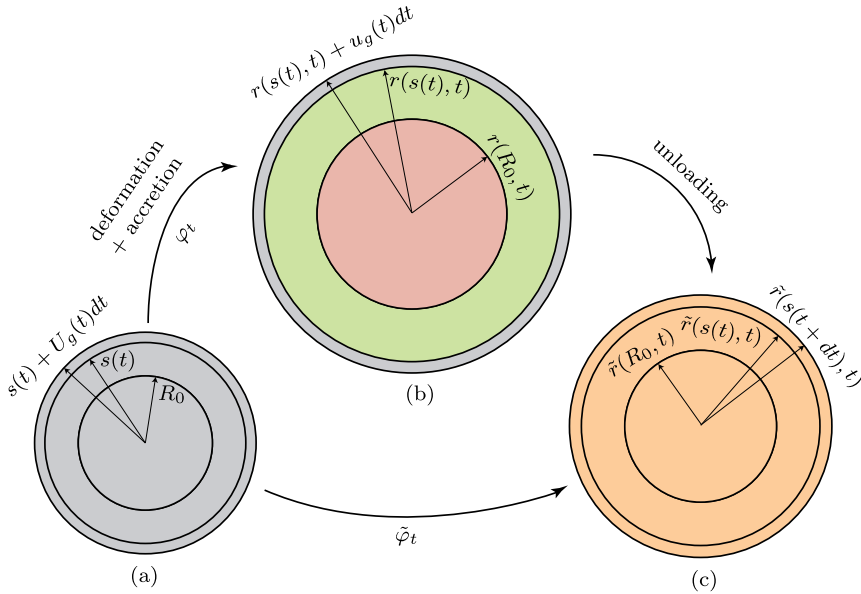


Fig. 3 Cross section of a circular cylindrical bar undergoing symmetric accretion and torsion simultaneously. (a) The material manifold $(\mathcal{B}, \mathbf{G})$. The radial coordinate of the boundary of the accreting bar at time t is $s(t)$. At a later time $t + dt$ the radial coordinate changes to $s(t) + U_g(t)dt$. (b) The deformed bar under torsion with a layer of stress-free material of thickness $u_g(t)dt$ joining its boundary during the time interval $[t, t + dt]$. (c) The residually-stressed accreted bar after the removal of the external torque

on the boundary is $V^r(s(t), t)$, and this implies that

$$u_g(t) = r'(s(t), t) U_g(t). \tag{3.8}$$

Following [32], we choose $U_g(t) = u_g(t)$. Sozio and Yavari [32] showed that other choices for $U_g(t)$ will result in isometric material metrics. In other words, this choice will not affect the calculation of stresses, see Remark 3.1.

From (3.8), the choice $U_g(t) = u_g(t)$ imposes the following constraint on $r(R, t)$:

$$r'(s(t), t) = 1, \text{ or } r'(R, \tau(R)) = 1. \tag{3.9}$$

Note that $s(t) = R_0 + \int_0^t u_g(\xi)d\xi$. In order to simplify the calculations, let us assume that the spatial growth velocity is constant, i.e., $u_g(t) = u_0 > 0$. Thus

$$s(t) = R_0 + u_0t, \text{ or } \tau(R) = \frac{R - R_0}{u_0}. \tag{3.10}$$

The constraint (3.9) is simplified to read

$$r'(R_0 + u_0t, t) = 1, \text{ or } r'\left(R, \frac{R - R_0}{u_0}\right) = 1. \tag{3.11}$$

For the initial body, i.e., for $0 \leq R \leq R_0$, the material metric has the representation (3.1)₁. For $R_0 \leq R \leq s(t)$, we assume that the accreted cylindrical layer at any instant of time t is stress-free (generalizing our analysis to the case of pre-stressed material is straightforward

[32]. This implies that the material metric at $R = s(t)$ is the pull-back of the metric of the (Euclidean) ambient space, i.e.,

$$\mathbf{G}(s(t)) = \varphi_t^* \mathbf{g}(r(s(t), t)), \text{ or } \mathbf{G}(R) = \varphi_{\tau(R)}^* \mathbf{g}(r(R, \tau(R))). \tag{3.12}$$

In components, one has $G_{AB}(s(t)) = G_{AB}(R) = F^a_A(R, \tau(R)) F^b_B(R, \tau(R)) g_{ab}(r(R, \tau(R)))$. Therefore

$$\begin{aligned} \mathbf{G}(R) &= \begin{bmatrix} r'^2(R, \tau(R)) & 0 & 0 \\ 0 & r^2(R, \tau(R)) & \psi(\tau(R))r^2(R, \tau(R)) \\ 0 & \psi(\tau(R))r^2(R, \tau(R)) & \psi^2(\tau(R))r^2(R, \tau(R)) + \lambda^4(\tau(R)) \end{bmatrix} \\ &= \begin{bmatrix} 1 & 0 & 0 \\ 0 & r^2(R, \tau(R)) & \psi(\tau(R))r^2(R, \tau(R)) \\ 0 & \psi(\tau(R))r^2(R, \tau(R)) & \psi^2(\tau(R))r^2(R, \tau(R)) + \lambda^4(\tau(R)) \end{bmatrix}, \end{aligned} \tag{3.13}$$

where use was made of (3.9), and $\tau(R)$ is given in (3.10)₂.

For this accretion problem, the material manifold is an evolving Riemannian manifold $(\mathcal{B}_t, \mathbf{G})$, where

$$\mathcal{B}_t = \{(R, \Theta, Z) : 0 \leq \Theta < 2\pi, R_0 \leq R \leq s(t) = R_0 + u_0 t, 0 \leq Z \leq L\}, \tag{3.14}$$

and⁶

$$\begin{aligned} 0 \leq R \leq R_0 : \mathbf{G} &= \begin{bmatrix} 1 & 0 & 0 \\ 0 & R^2 & 0 \\ 0 & 0 & 1 \end{bmatrix}, \\ R_0 \leq R \leq R_0 + u_0 t : & \tag{3.15} \\ \mathbf{G} &= \begin{bmatrix} 1 & 0 & 0 \\ 0 & r^2(R, \tau(R)) & \psi(\tau(R))r^2(R, \tau(R)) \\ 0 & \psi(\tau(R))r^2(R, \tau(R)) & \psi^2(\tau(R))r^2(R, \tau(R)) + \lambda^4(\tau(R)) \end{bmatrix}. \end{aligned}$$

The incompressibility constraint for $R \geq R_0$ is written as

$$J = \sqrt{\frac{\det \mathbf{g}}{\det \mathbf{G}}} \det \mathbf{F} = \frac{r(R, t)}{r(R, \tau(R)) \lambda^2(\tau(R))} r'(R, t) \lambda^2(t) = 1. \tag{3.16}$$

Thus

$$r(R, t) r'(R, t) = \bar{r}(R) \frac{\lambda^2(\tau(R))}{\lambda^2(t)}, \tag{3.17}$$

⁶Note that as soon as a layer is deposited it becomes part of the body and participates in the deformation process. If the load is fixed, one would have a classical twist-fit problem (Fig. 1). The time dependence of the load (or twist) makes the natural state of the body (the material metric) inhomogeneous. In other words, after completion of accretion if each cylindrical layer is allowed to relax independently of the rest of the body the collection of relaxed thin cylindrical shells can not be put back together in the Euclidean ambient space without local elastic deformations. This incompatibility of the local rest configurations depends on the state of deformation during accretion and indirectly on the applied load during accretion.

where $\bar{r}(R) := r(R, \tau(R)) = r\left(R, \frac{R-R_0}{u_0}\right)$. Hence

$$r^2(R, t) = \frac{R_0^2}{\lambda^2(t)} + \frac{2}{\lambda^2(t)} \int_{R_0}^R \bar{r}(\xi) \lambda^2(\tau(\xi)) d\xi, \quad R_0 \leq R \leq R_0 + u_0 t, \tag{3.18}$$

where use was made of (3.5). Thus

$$\lambda^2(t) r^2(R, t) = R_0^2 + 2 \int_{R_0}^R \bar{r}(\xi) \lambda^2(\tau(\xi)) d\xi. \tag{3.19}$$

The right-hand side is time independent, and hence, $\lambda^2(t) r^2(R, t)$ is independent of time. In particular, $\lambda^2(t) r^2(R, t) = \lambda^2(\tau(R)) r^2(R, \tau(R))$, and hence

$$r(R, t) = \frac{\lambda(\tau(R))}{\lambda(t)} \bar{r}(R). \tag{3.20}$$

The constraint (3.9) gives the following ODE for the unknown function $\bar{r}(R)$:

$$\bar{r}'(R) + \frac{\lambda'(\tau(R)) \tau'(R)}{\lambda(\tau(R))} \bar{r}(R) = 1. \tag{3.21}$$

With the initial condition $\bar{r}(R_0) = R_0$, this ODE has the following solution:

$$\bar{r}(R) = \frac{1}{\lambda(\tau(R))} \left[R_0 + \int_{R_0}^R \lambda(\tau(\xi)) d\xi \right]. \tag{3.22}$$

Therefore⁷

$$r(R, t) = \frac{1}{\lambda(t)} \left[R_0 + \int_{R_0}^R \lambda(\tau(\xi)) d\xi \right]. \tag{3.23}$$

For $0 \leq R \leq R_0$:

$$\mathbf{b}^\sharp(R, t) = \begin{bmatrix} \frac{1}{\lambda^2(t)} & 0 & 0 \\ 0 & \frac{1}{R^2} + \psi^2(t) & \lambda^2(t)\psi(t) \\ 0 & \lambda^2(t)\psi(t) & \lambda^4(t) \end{bmatrix}, \tag{3.24}$$

$$\mathbf{c}^\sharp(R, t) = \begin{bmatrix} \lambda^2(t) & 0 & 0 \\ 0 & \frac{\lambda^4(t)}{R^2} & -\psi(t) \\ 0 & -\psi(t) & \frac{R^2\psi^2(t)+1}{\lambda^4(t)} \end{bmatrix}.$$

The principal invariants of \mathbf{b} read

$$I_1(R, t) = \frac{2 + R^2\psi^2(t) + \lambda^6(t)}{\lambda^2(t)}, \quad I_2(R, t) = \frac{1 + R^2\psi^2(t) + 2\lambda^6(t)}{\lambda^4(t)}. \tag{3.25}$$

⁷This is identical to what was obtained in [51] in the case of accreting bars under finite extension.

The Cauchy stress has the following non-zero components

$$\begin{aligned}
 \sigma^{rr}(R, t) &= -p(R, t) + \frac{\alpha(R, t)}{\lambda^2(t)} - \beta(R, t)\lambda^2(t), \\
 \sigma^{\theta\theta}(R, t) &= -p(R, t) \frac{\lambda^2(t)}{R^2} + \alpha(R, t) \left[\frac{1}{R^2} + \psi^2(t) \right] - \frac{\beta(R, t)\lambda^4(t)}{R^2}, \\
 \sigma^{zz}(R, t) &= -p(R, t) + \alpha(R, t)\lambda^4(t) - \beta(R, t) \frac{1 + R^2\psi^2(t)}{\lambda^4(t)}, \\
 \sigma^{\theta z}(R, t) &= \psi(t) [\alpha(R, t)\lambda^2(t) + \beta(R, t)],
 \end{aligned}
 \tag{3.26}$$

where $\alpha = 2 \frac{\partial W}{\partial I_1}$ and $\beta = 2 \frac{\partial W}{\partial I_2}$. Using the circumferential and axial equilibrium equations one concludes that $p = p(R, t)$. The radial equilibrium equation reads $\frac{\partial \sigma^{rr}}{\partial r} + \frac{1}{r} \sigma^{rr} - r \sigma^{\theta\theta} = 0$. This can be rewritten in terms of the referential coordinates as

$$\frac{\partial \sigma^{rr}}{\partial R} - \frac{\psi^2(t)}{\lambda^2(t)} \alpha R = 0.
 \tag{3.27}$$

Thus

$$\sigma^{rr}(R, t) = \sigma_0(t) - \frac{\psi^2(t)}{\lambda^2(t)} \int_R^{R_0} \xi \alpha(\xi, t) d\xi,
 \tag{3.28}$$

where $\sigma_0(t) = \sigma^{rr}(R_0, t)$. This implies that for the initial body one has

$$-p(R, t) = \sigma_0(t) - \frac{\psi^2(t)}{\lambda^2(t)} \int_R^{R_0} \xi \alpha(\xi, t) d\xi - \frac{\alpha(R, t)}{\lambda^2(t)} + \beta(R, t)\lambda^2(t).
 \tag{3.29}$$

For the *secondary body*, i.e., for $R_0 \leq R \leq s(t)$:

$$\begin{aligned}
 \mathbf{b}^\#(R, t) &= \begin{bmatrix} \frac{\lambda^2(\tau(R))}{\lambda^2(t)} & 0 & 0 \\ 0 & \frac{\lambda^4(\tau(R)) + \bar{r}^2(R)(\psi(t) - \psi(\tau(R)))^2}{\lambda^4(\tau(R))\bar{r}^2(R)} & \frac{\lambda^2(t)(\psi(t) - \psi(\tau(R)))}{\lambda^4(\tau(R))} \\ 0 & \frac{\lambda^2(t)(\psi(t) - \psi(\tau(R)))}{\lambda^4(\tau(R))} & \frac{\lambda^4(t)}{\lambda^4(\tau(R))} \end{bmatrix}, \\
 \mathbf{c}^\#(R, t) &= \begin{bmatrix} \frac{\lambda^2(t)}{\lambda^2(\tau(R))} & 0 & 0 \\ 0 & \frac{\lambda^4(t)}{\lambda^4(\tau(R))\bar{r}^2(R)} & \frac{\psi(\tau(R)) - \psi(t)}{\lambda^2(\tau(R))} \\ 0 & \frac{\psi(\tau(R)) - \psi(t)}{\lambda(\tau(R))^2} & \frac{\lambda^4(\tau(R)) + \bar{r}^2(R)(\psi(t) - \psi(\tau(R)))^2}{\lambda^4(t)} \end{bmatrix}.
 \end{aligned}
 \tag{3.30}$$

The principal invariants of \mathbf{b} read

$$\begin{aligned}
 I_1(R, t) &= \frac{\lambda^4(t)}{\lambda^4(\tau(R))} + \frac{2\lambda^2(\tau(R))}{\lambda^2(t)} + \frac{\bar{r}^2(R)(\psi(t) - \psi(\tau(R)))^2}{\lambda^2(\tau(R))\lambda^2(t)}, \\
 I_2(R, t) &= \frac{\lambda^4(\tau(R))}{\lambda^4(t)} + \frac{2\lambda^2(t)}{\lambda^2(\tau(R))} + \frac{\bar{r}^2(R)(\psi(t) - \psi(\tau(R)))^2}{\lambda^4(t)}.
 \end{aligned}
 \tag{3.31}$$

The non-zero components of the Cauchy stress are

$$\begin{aligned}
 \sigma^{rr}(R, t) &= -p(R, t) + \alpha(R, t) \frac{\lambda^2(\tau(R))}{\lambda^2(t)} - \beta(R, t) \frac{\lambda^2(t)}{\lambda^2(\tau(R))}, \\
 \sigma^{\theta\theta}(R, t) &= -p(R, t) \frac{\lambda^2(t)}{\lambda^2(\tau(R))\bar{r}^2(R)} + \frac{\alpha(R, t)}{\bar{r}^2(R)} - \frac{\beta(R, t)\lambda^4(t)}{\lambda^4(\tau(R))\bar{r}^2(R)} \\
 &\quad + \frac{\alpha(R, t)(\psi(t) - \psi(\tau(R)))^2}{\lambda^4(\tau(R))}, \\
 \sigma^{zz}(R, t) &= -p(R, t) + \frac{\alpha(R, t)\lambda^4(t)}{\lambda^4(\tau(R))} - \frac{\beta(R, t)\lambda^4(\tau(R))}{\lambda^4(t)} \\
 &\quad - \frac{\beta(R, t)\bar{r}^2(R)(\psi(t) - \psi(\tau(R)))^2}{\lambda^4(t)}, \\
 \sigma^{\theta z}(R, t) &= \frac{\psi(t) - \psi(\tau(R))}{\lambda^4(\tau(R))} [\alpha(R, t)\lambda^2(t) + \beta(R, t)\lambda^2(\tau(R))].
 \end{aligned}
 \tag{3.32}$$

The equilibrium equation reads

$$\frac{\partial \sigma^{rr}(R, t)}{\partial R} - \alpha(R, t) \frac{\bar{r}(R)(\psi(t) - \psi(\tau(R)))^2}{\lambda^2(\tau(R))\lambda^2(t)} = 0.
 \tag{3.33}$$

Thus

$$\sigma^{rr}(R, t) = \sigma_0(t) + \int_{R_0}^R \alpha(\xi, t) \frac{\bar{r}(\xi)(\psi(t) - \psi(\tau(\xi)))^2}{\lambda^2(\tau)\lambda^2(t)} d\xi.
 \tag{3.34}$$

This implies that for $R_0 \leq R \leq s(t)$:

$$\begin{aligned}
 -p(R, t) &= \sigma_0(t) + \int_{R_0}^R \alpha(\xi, t) \frac{\bar{r}(\xi)(\psi(t) - \psi(\tau(\xi)))^2}{\lambda^2(\tau)\lambda^2(t)} d\xi - \alpha(R, t) \frac{\lambda^2(\tau(R))}{\lambda^2(t)} \\
 &\quad + \beta(R, t) \frac{\lambda^2(t)}{\lambda^2(\tau(R))}.
 \end{aligned}
 \tag{3.35}$$

Thus on the growth surface, one has

$$-p(s(t), t) = \sigma_0(t) + \int_{R_0}^{s(t)} \alpha(\xi, t) \frac{\bar{r}(\xi)(\psi(t) - \psi(\tau(\xi)))^2}{\lambda^2(\tau(\xi))\lambda^2(t)} d\xi - \alpha(s(t), t) + \beta(s(t), t).
 \tag{3.36}$$

Note that for $R = s(t)$, $\tau(R) = \tau(s(t)) = t$, and hence $\psi(t) = \psi(\tau(R))$. Thus

$$\boldsymbol{\sigma}(s(t), t) = [-p(s(t), t) + \alpha(s(t), t) - \beta(s(t), t)] \begin{bmatrix} 1 & 0 & 0 \\ 0 & \frac{1}{\bar{r}^2(R)} & 0 \\ 0 & 0 & 1 \end{bmatrix}.
 \tag{3.37}$$

We know that $\boldsymbol{\sigma}(s(t), t) = \mathbf{0}$ (note that stress-free material is added on the boundary and this means that the stress tensor vanishes on the boundary), and hence $-p(s(t), t) + \alpha(s(t), t) - \beta(s(t), t) = 0$. Therefore

$$\sigma_0(t) = - \int_{R_0}^{s(t)} \alpha(\xi, t) \frac{\bar{r}(\xi)(\psi(t) - \psi(\tau(\xi)))^2}{\lambda^2(\tau(\xi))\lambda^2(t)} d\xi.
 \tag{3.38}$$

Thus, for $R_0 \leq R \leq s(t)$ we have

$$\begin{aligned}
 -p(R, t) = & -\frac{1}{\lambda^2(t)} \int_R^{s(t)} \alpha(\xi, t) \frac{\bar{r}(\xi)(\psi(t) - \psi(\tau(\xi)))^2}{\lambda^2(\tau(\xi))} d\xi - \alpha(R, t) \frac{\lambda^2(\tau(R))}{\lambda^2(t)} \\
 & + \beta(R, t) \frac{\lambda^2(t)}{\lambda^2(\tau(R))}.
 \end{aligned} \tag{3.39}$$

From (3.29), for $0 \leq R \leq R_0$:

$$\begin{aligned}
 -p(R, t) = & -\frac{\psi^2(t)}{\lambda^2(t)} \int_R^{R_0} \xi \alpha(\xi, t) d\xi - \frac{1}{\lambda^2(t)} \int_{R_0}^{s(t)} \alpha(\xi, t) \frac{\bar{r}(\xi)(\psi(t) - \psi(\tau(\xi)))^2}{\lambda^2(\tau(\xi))} d\xi \\
 & - \frac{\alpha(R, t)}{\lambda^2(t)} + \beta(R, t) \lambda^2(t).
 \end{aligned} \tag{3.40}$$

Therefore, the non-zero physical components of the Cauchy stress for the initial body ($0 \leq R \leq R_0$) are⁸

$$\begin{aligned}
 \bar{\sigma}^{rr}(R, t) = & -\frac{\psi^2(t)}{\lambda^2(t)} \int_R^{R_0} \xi \alpha(\xi, t) d\xi - \frac{1}{\lambda^2(t)} \int_{R_0}^{s(t)} \alpha(\xi, t) \frac{\bar{r}(\xi)(\psi(t) - \psi(\tau(\xi)))^2}{\lambda^2(\tau(\xi))} d\xi, \\
 \bar{\sigma}^{\theta\theta}(R, t) = & -\frac{\psi^2(t)}{\lambda^2(t)} \int_R^{R_0} \xi \alpha(\xi, t) d\xi - \frac{1}{\lambda^2(t)} \int_{R_0}^{s(t)} \alpha(\xi, t) \frac{\bar{r}(\xi)(\psi(t) - \psi(\tau(\xi)))^2}{\lambda^2(\tau(\xi))} d\xi \\
 & + \alpha(R, t) \frac{R^2 \psi^2(t)}{\lambda^2(t)}, \\
 \bar{\sigma}^{zz}(R, t) = & -\frac{\psi^2(t)}{\lambda^2(t)} \int_R^{R_0} \xi \alpha(\xi, t) d\xi - \frac{1}{\lambda^2(t)} \int_{R_0}^{s(t)} \alpha(\xi, t) \frac{\bar{r}(\xi)(\psi(t) - \psi(\tau(\xi)))^2}{\lambda^2(\tau(\xi))} d\xi \\
 & + \alpha(R, t) \left[\lambda^4(t) - \frac{1}{\lambda^2(t)} \right] + \beta(R, t) \left[\lambda^2(t) - \frac{1 + R^2 \psi^2(t)}{\lambda^4(t)} \right], \\
 \bar{\sigma}^{\theta z}(R, t) = & \frac{R \psi(t)}{\lambda(t)} [\alpha(R, t) \lambda^2(t) + \beta(R, t)].
 \end{aligned} \tag{3.41}$$

For the secondary body ($R_0 \leq R \leq s(t)$) they read

$$\begin{aligned}
 \bar{\sigma}^{rr}(R, t) = & -\frac{1}{\lambda^2(t)} \int_R^{s(t)} \alpha(\xi, t) \frac{\bar{r}(\xi)(\psi(t) - \psi(\tau(\xi)))^2}{\lambda^2(\tau(\xi))} d\xi, \\
 \bar{\sigma}^{\theta\theta}(R, t) = & -\frac{1}{\lambda^2(t)} \int_R^{s(t)} \alpha(\xi, t) \frac{\bar{r}(\xi)(\psi(t) - \psi(\tau(\xi)))^2}{\lambda^2(\tau(\xi))} d\xi \\
 & + \frac{\alpha(R, t) \bar{r}^2(R) (\psi(t) - \psi(\tau(R)))^2}{\lambda^2(t) \lambda^2(\tau(R))},
 \end{aligned}$$

⁸The physical components of the Cauchy stress are defined as $\bar{\sigma}^{ab} = \sigma^{ab} \sqrt{g_{aa} g_{bb}}$ (no summation) [41].

$$\begin{aligned} \bar{\sigma}^{zz}(R, t) &= -\frac{1}{\lambda^2(t)} \int_R^{s(t)} \alpha(\xi, t) \frac{\bar{r}(\xi)(\psi(t) - \psi(\tau(\xi)))^2}{\lambda^2(\tau(\xi))} d\xi \\ &\quad - \frac{\beta(R, t) \bar{r}^2(R)(\psi(t) - \psi(\tau(R)))^2}{\lambda^4(t)} + \alpha(R, t) \left[\frac{\lambda^4(t)}{\lambda^4(\tau(R))} - \frac{\lambda^2(\tau(R))}{\lambda^2(t)} \right] \\ &\quad + \beta(R, t) \left[\frac{\lambda^2(t)}{\lambda^2(\tau(R))} - \frac{\lambda^4(\tau(R))}{\lambda^4(t)} \right], \\ \bar{\sigma}^{\theta z}(R, t) &= \frac{\bar{r}(R)(\psi(t) - \psi(\tau(R)))}{\lambda(t)\lambda^3(\tau(R))} [\alpha(R, t)\lambda^2(t) + \beta(R, t)\lambda^2(\tau(R))]. \end{aligned} \tag{3.42}$$

At the two ends of the bar ($Z = 0, L$), the axial force is assumed to be zero and the applied torque is given, i.e.,

$$\begin{aligned} F(t) &= 2\pi \int_0^{s(t)} P^{zZ}(R, t)R dR = 0, \\ M(t) &= 2\pi \int_0^{s(t)} \bar{P}^{\theta Z}(R, t)R^2 dR = 2\pi \int_0^{s(t)} P^{\theta Z}(R, t)r(R, t)R^2 dR, \end{aligned} \tag{3.43}$$

where $\bar{P}^{zZ} = P^{zZ}$ is the zZ -component of the first Piola-Kirchhoff stress and $\bar{P}^{\theta Z} = r P^{\theta Z}$ is the physical θZ component of the first Piola-Kirchhoff stress. Note that

$$P^{zZ}(R, t) = \begin{cases} -\frac{\psi^2(t)}{\lambda^4(t)} \int_R^{R_0} \xi \alpha(\xi, t) d\xi - \frac{1}{\lambda^4(t)} \int_{R_0}^{s(t)} \alpha(\xi, t) \frac{\bar{r}(\xi)(\psi(t) - \psi(\tau(\xi)))^2}{\lambda^2(\tau(\xi))} d\xi \\ \quad + \alpha(R, t) \left[\lambda^2(t) - \frac{1}{\lambda^4(t)} \right] + \beta(R, t) \left[1 - \frac{1+R^2\psi^2(t)}{\lambda^6(t)} \right], \\ \quad 0 \leq R \leq R_0, \\ -\frac{1}{\lambda^4(t)} \int_R^{s(t)} \alpha(\xi, t) \frac{\bar{r}(\xi)(\psi(t) - \psi(\tau(\xi)))^2}{\lambda^2(\tau(\xi))} d\xi - \frac{\beta(R, t)\bar{r}^2(R)(\psi(t) - \psi(\tau(R)))^2}{\lambda^6(t)} \\ \quad + \alpha(R, t) \left[\frac{\lambda^2(t)}{\lambda^4(\tau(R))} - \frac{\lambda^2(\tau(R))}{\lambda^4(t)} \right] + \beta(R, t) \left[\frac{1}{\lambda^2(\tau(R))} - \frac{\lambda^4(\tau(R))}{\lambda^6(t)} \right], \\ \quad R_0 \leq R \leq s(t), \end{cases} \tag{3.44}$$

and

$$P^{\theta Z}(R, t) = \begin{cases} \left[\alpha(R, t) + \frac{\beta(R, t)}{\lambda^2(t)} \right] \psi(t), & 0 \leq R \leq R_0, \\ \frac{\psi(t) - \psi(\tau(R))}{\lambda^2(t)\lambda^4(\tau(R))} [\alpha(R, t)\lambda^2(t) + \beta(R, t)\lambda^2(\tau(R))], & R_0 \leq R \leq s(t). \end{cases} \tag{3.45}$$

Remark 3.1 Instead of the choice $U_g(t) = u_g(t) = u_0$, let us assume that $U_g(t) = U_0 > 0$. In this case, instead of the constraint (3.9), one has

$$r'(s(t), t) = \frac{u_0}{U_0}, \text{ or } r'(\hat{R}, \hat{\tau}(\hat{R})) = \frac{u_0}{U_0}, \tag{3.46}$$

where \hat{R} is the radial coordinate of the new material manifold (for $0 \leq R \leq R_0, \hat{R} = R$). Note that in the two material manifolds the time of attachment of the same layer should be the same, i.e., $\hat{\tau}(\hat{R}) = \tau(R)$. This implies that

$$\hat{R} = \left(1 - \frac{U_0}{u_0}\right) R_0 + \frac{U_0}{u_0} R. \tag{3.47}$$

With this choice, the new time dependent material manifold is

$$\mathcal{B}_t = \left\{(\hat{R}, \Theta, Z) : 0 \leq \Theta < 2\pi, R_0 \leq \hat{R} \leq s(t) = R_0 + U_0 t, 0 \leq Z \leq L\right\}. \tag{3.48}$$

Let us denote the radial component of the deformation mapping with respect to the new material manifold by $\hat{r}(\hat{R}, t)$. The material metric has the following representation

$$0 \leq R \leq R_0 : \mathbf{G} = \begin{bmatrix} 1 & 0 & 0 \\ 0 & R^2 & 0 \\ 0 & 0 & 1 \end{bmatrix},$$

$$R_0 \leq \hat{R} \leq R_0 + U_0 t : \tag{3.49}$$

$$\mathbf{G} = \begin{bmatrix} \left(\frac{u_0}{U_0}\right)^2 & 0 & 0 \\ 0 & \hat{r}^2(\hat{R}, \hat{\tau}(\hat{R})) & \psi(\hat{\tau}(\hat{R})) \hat{r}^2(\hat{R}, \hat{\tau}(\hat{R})) \\ 0 & \psi(\hat{\tau}(\hat{R})) \hat{r}^2(\hat{R}, \hat{\tau}(\hat{R})) & \psi^2(\hat{\tau}(\hat{R})) \hat{r}^2(\hat{R}, \hat{\tau}(\hat{R})) + \lambda^4(\hat{\tau}(\hat{R})) \end{bmatrix}.$$

With respect to the new material manifold

$$\mathbf{F} = \hat{\mathbf{F}}(\hat{R}, t) = \begin{bmatrix} \hat{r}'(\hat{R}, t) & 0 & 0 \\ 0 & 1 & \psi(t) \\ 0 & 0 & \lambda^2(t) \end{bmatrix}. \tag{3.50}$$

For $0 \leq R \leq R_0$, we have $\hat{R} = R$, and $\hat{r}(\hat{R}, t) = r(R, t) = \frac{R}{\lambda(t)}$. For $R \geq R_0$, incompressibility implies that

$$\hat{J} = \frac{\hat{r}(\hat{R}, t)}{\frac{u_0}{U_0} \hat{r}(\hat{R}, \hat{\tau}(\hat{R})) \lambda^2(\hat{\tau}(\hat{R}))} \hat{r}'(\hat{R}, t) \lambda^2(t) = 1. \tag{3.51}$$

Therefore

$$\lambda^2(t) \hat{r}^2(\hat{R}, t) = R_0^2 + 2 \frac{u_0}{U_0} \int_{R_0}^{\hat{R}} \bar{r}(\eta) \lambda^2(\hat{\tau}(\eta)) d\eta, \tag{3.52}$$

where $\bar{r}(\eta) = \hat{r}(\eta, \hat{\tau}(\eta))$. The right-hand side of the above relation is time independent, and hence $\lambda^2(t) \hat{r}^2(\hat{R}, t) = \lambda^2(\hat{\tau}(\hat{R})) \hat{r}^2(\hat{R}, \hat{\tau}(\hat{R}))$, or

$$\hat{r}(\hat{R}, t) = \frac{\lambda(\hat{\tau}(\hat{R}))}{\lambda(t)} \bar{r}(\hat{R}). \tag{3.53}$$

The constraint (3.46) gives the following ODE for the unknown function $\bar{r}(\hat{R})$:

$$\bar{r}'(\hat{R}) + \frac{[\lambda(\hat{\tau}(\hat{R}))]'}{\lambda(\hat{\tau}(\hat{R}))} \bar{r}(\hat{R}) = \frac{u_0}{U_0}. \tag{3.54}$$

This ODE has the following solution:

$$\bar{f}(\hat{R}) = \frac{1}{\lambda(\hat{\tau}(\hat{R}))} \left[R_0 + \frac{u_0}{U_0} \int_{R_0}^{\hat{R}} \lambda(\hat{\tau}(\eta)) d\eta \right] = \frac{1}{\lambda(\tau(R))} \left[R_0 + \frac{u_0}{U_0} \int_{R_0}^{\hat{R}} \lambda(\hat{\tau}(\eta)) d\eta \right]. \tag{3.55}$$

Note that $d\hat{R} = \frac{U_0}{u_0} dR$, and hence $\frac{u_0}{U_0} \int_{R_0}^{\hat{R}} \lambda(\hat{\tau}(\eta)) d\eta = \int_{R_0}^R \lambda(\tau(\xi)) d\xi$. Substituting this relation back into (3.55), and comparing this with (3.23), we observe that $\hat{\tau}(\hat{R}, t) = r(R, t)$. This means that kinematics is not affected by the choice $U_g(t) = U_0 > 0$. Consequently, stresses are not affected either.

Remark 3.2 In [10] for each of the six known families of universal deformations of incompressible isotropic solids [9, 12, 29] the corresponding universal eigenstrains (or equivalently material metrics) were found. However, there may be many more pairs of universal deformations and their corresponding universal eigenstrains (material metrics). In [51] one such family of universal deformations and eigenstrains was found. In this paper, we have found another family of universal deformations and eigenstrains. More specifically, we have shown that the following pair of deformations and material metrics (φ, \mathbf{G})

$$(r, \theta, z) = \varphi(R, \Theta, Z) : \begin{cases} r = r(R, t) = \begin{cases} \frac{R}{\lambda(t)}, & 0 \leq R \leq R_0, \\ \frac{1}{\lambda(t)} \left[R_0 + \int_{R_0}^R \lambda(\tau(\xi)) d\xi \right], & R_0 \leq R \leq s(t), \end{cases} \\ \theta = \Theta + \psi(t)Z, \\ z = \lambda^2(t)Z, \end{cases} \tag{3.56}$$

and

$$\mathbf{G} = \begin{cases} \begin{bmatrix} 1 & 0 & 0 \\ 0 & R^2 & 0 \\ 0 & 0 & 1 \end{bmatrix}, & 0 \leq R \leq R_0, \\ \begin{bmatrix} 1 & 0 & 0 \\ 0 & r^2(R, \tau(R)) & \psi(\tau(R))r^2(R, \tau(R)) \\ 0 & \psi(\tau(R))r^2(R, \tau(R)) & \psi^2(\tau(R))r^2(R, \tau(R)) + \lambda^4(\tau(R)) \end{bmatrix}, & R_0 \leq R \leq s(t), \end{cases} \tag{3.57}$$

are universal.

Example 3.3 For neo-Hookean solids $\alpha(R) = \mu(R) > 0$ and $\beta(R) = 0$. Let us also assume a uniform shear modulus $\mu(R) = \mu_0$. Therefore, the non-zero physical components of the Cauchy stress for the initial body ($0 \leq R \leq R_0$) are

$$\begin{aligned} \bar{\sigma}^{rr}(R, t) &= -\mu_0 \frac{\psi^2(t)}{\lambda^2(t)} \frac{R_0^2 - R^2}{2} - \frac{\mu_0}{\lambda^2(t)} \int_{R_0}^{s(t)} \frac{\bar{f}(\xi)(\psi(t) - \psi(\tau(\xi)))^2}{\lambda^2(\tau(\xi))} d\xi, \\ \bar{\sigma}^{\theta\theta}(R, t) &= -\mu_0 \frac{\psi^2(t)}{\lambda^2(t)} \frac{R_0^2 - R^2}{2} - \frac{\mu_0}{\lambda^2(t)} \int_{R_0}^{s(t)} \frac{\bar{f}(\xi)(\psi(t) - \psi(\tau(\xi)))^2}{\lambda^2(\tau(\xi))} d\xi \\ &\quad + \mu_0 \frac{R^2 \psi^2(t)}{\lambda^2(t)}, \end{aligned} \tag{3.58}$$

$$\begin{aligned} \bar{\sigma}^{zz}(R, t) &= -\mu_0 \frac{\psi^2(t) R_0^2 - R^2}{\lambda^2(t)} - \frac{\mu_0}{\lambda^2(t)} \int_{R_0}^{s(t)} \frac{\bar{r}(\xi)(\psi(t) - \psi(\tau(\xi)))^2}{\lambda^2(\tau(\xi))} d\xi \\ &\quad + \mu_0 \left[\lambda^4(t) - \frac{1}{\lambda^2(t)} \right], \\ \bar{\sigma}^{\theta z}(R, t) &= \mu_0 R \psi(t) \lambda(t). \end{aligned}$$

For the secondary body ($R_0 \leq R \leq s(t)$) they read

$$\begin{aligned} \bar{\sigma}^{rr}(R, t) &= -\frac{\mu_0}{\lambda^2(t)} \int_R^{s(t)} \frac{\bar{r}(\xi)(\psi(t) - \psi(\tau(\xi)))^2}{\lambda^2(\tau(\xi))} d\xi, \\ \bar{\sigma}^{\theta\theta}(R, t) &= -\frac{\mu_0}{\lambda^2(t)} \int_R^{s(t)} \frac{\bar{r}(\xi)(\psi(t) - \psi(\tau(\xi)))^2}{\lambda^2(\tau(\xi))} d\xi + \mu_0 \frac{\bar{r}^2(R)(\psi(t) - \psi(\tau(R)))^2}{\lambda^2(t)\lambda^2(\tau(R))}, \\ \bar{\sigma}^{zz}(R, t) &= -\frac{\mu_0}{\lambda^2(t)} \int_R^{s(t)} \frac{\bar{r}(\xi)(\psi(t) - \psi(\tau(\xi)))^2}{\lambda^2(\tau(\xi))} d\xi + \mu_0 \left[\frac{\lambda^4(t)}{\lambda^4(\tau(R))} - \frac{\lambda^2(\tau(R))}{\lambda^2(t)} \right], \\ \bar{\sigma}^{\theta z}(R, t) &= \mu_0 \frac{\bar{r}(R)(\psi(t) - \psi(\tau(R)))}{\lambda^3(\tau(R))} \lambda(t). \end{aligned} \tag{3.59}$$

Thus

$$P^{zZ}(R, t) = \mu_0 \begin{cases} -\frac{\psi^2(t)}{2\lambda^4(t)}(R_0^2 - R^2) + \lambda^2(t) - \frac{1}{\lambda^4(t)} \\ \quad - \frac{1}{\lambda^4(t)} \int_{R_0}^{s(t)} \frac{\bar{r}(\xi)(\psi(t) - \psi(\tau(\xi)))^2}{\lambda^2(\tau(\xi))} d\xi, & 0 \leq R \leq R_0, \\ \frac{\lambda^2(t)}{\lambda^4(\tau(R))} - \frac{\lambda^2(\tau(R))}{\lambda^4(t)} - \frac{1}{\lambda^4(t)} \int_R^{s(t)} \frac{\bar{r}(\xi)(\psi(t) - \psi(\tau(\xi)))^2}{\lambda^2(\tau(\xi))} d\xi, & R_0 \leq R \leq s(t), \end{cases} \tag{3.60}$$

and

$$P^{\theta Z}(R, t) = \mu_0 \begin{cases} \psi(t), & 0 \leq R \leq R_0, \\ \frac{\psi(t) - \psi(\tau(R))}{\lambda^4(\tau(R))}, & R_0 \leq R \leq s(t). \end{cases} \tag{3.61}$$

The applied torque is calculated as

$$M(t) = \frac{\pi \mu_0 R_0^4}{2} \frac{\psi(t)}{\lambda(t)} + 2\pi \mu_0 R_0 [\psi(t) h_1(t) - h_2(t)] + 2\pi \mu_0 [\psi(t) h_3(t) - h_4(t)], \tag{3.62}$$

where

$$\begin{aligned} h_1(t) &= \int_{R_0}^{s(t)} \frac{R^2}{\lambda^5(\tau(R))} dR, & h_2(t) &= \int_{R_0}^{s(t)} \frac{R^2 \psi(\tau(R))}{\lambda^5(\tau(R))} dR, \\ h_3(t) &= \int_{R_0}^{s(t)} \frac{R^2 \gamma(R)}{\lambda^5(\tau(R))} dR, & h_4(t) &= \int_{R_0}^{s(t)} \frac{R^2 \psi(\tau(R)) \gamma(R)}{\lambda^5(\tau(R))} dR, \\ \gamma(R) &= \int_{R_0}^R \lambda(\tau(\xi)) d\xi. \end{aligned} \tag{3.63}$$

Thus

$$\begin{aligned}
 h'_1(t) &= \frac{u_0 s^2(t)}{\lambda^5(t)}, & h'_2(t) &= \frac{u_0 s^2(t) \psi(t)}{\lambda^5(t)}, \\
 h'_3(t) &= \frac{u_0 s^2(t) h_5(t)}{\lambda^5(t)}, & h'_4(t) &= \frac{u_0 s^2(t) \psi(t) h_5(t)}{\lambda^5(t)}, & h'_5(t) &= u_0 \lambda(t),
 \end{aligned}
 \tag{3.64}$$

where $h_5(t) = \gamma(s(t))$. We assume that $M(0) = 0$, $\lambda(0) = 1$, and $\psi(0) = 0$. Note also that $h_j(0) = 0$, $j = 1, \dots, 5$.

The zero applied force condition is written as

$$\begin{aligned}
 &\left[\lambda^2(t) - \frac{1}{\lambda^4(t)} \right] \frac{R_0^2}{2} - \frac{R_0^4 \psi^2(t)}{8\lambda^4(t)} + \lambda^2(t) k_1(t) - \frac{k_2(t)}{\lambda^4(t)} \\
 &- \frac{R_0^2}{2\lambda^4(t)} \left[\psi^2(t) (R_0 k_3(t) + k_4(t)) - 2\psi(t) (R_0 k_5(t) + k_6(t)) + R_0 k_7(t) + k_8(t) \right] \\
 &- \frac{1}{\lambda^4(t)} \left[\psi^2(t) (R_0 \hat{k}_3(t) + \hat{k}_4(t)) - 2\psi(t) (R_0 \hat{k}_5(t) + \hat{k}_6(t)) + R_0 \hat{k}_7(t) + \hat{k}_8(t) \right] = 0,
 \end{aligned}
 \tag{3.65}$$

where

$$\begin{aligned}
 k_1(t) &= \int_{R_0}^{s(t)} \frac{R}{\lambda^4(\tau(R))} dR, & k_2(t) &= \int_{R_0}^{s(t)} R \lambda^2(\tau(R)) dR, \\
 k_3(t) &= \int_{R_0}^{s(t)} \frac{R}{\lambda^3(\tau(R))} dR, & k_4(t) &= \int_{R_0}^{s(t)} \frac{\gamma(R)}{\lambda^3(\tau(R))} dR, \\
 k_5(t) &= \int_{R_0}^{s(t)} \frac{\psi(\tau(R))}{\lambda^3(\tau(R))} dR, & k_6(t) &= \int_{R_0}^{s(t)} \frac{\psi(\tau(R)) \gamma(R)}{\lambda^3(\tau(R))} dR, \\
 k_7(t) &= \int_{R_0}^{s(t)} \frac{\psi^2(\tau(R))}{\lambda^3(\tau(R))} dR, & k_8(t) &= \int_{R_0}^{s(t)} \frac{\psi^2(\tau(R)) \gamma(R)}{\lambda^3(\tau(R))} dR, \\
 \hat{k}_3(t) &= \int_{R_0}^{s(t)} R \int_R^{s(t)} \frac{1}{\lambda^3(\tau(\xi))} d\xi dR, & \hat{k}_4(t) &= \int_{R_0}^{s(t)} R \int_R^{s(t)} \frac{\gamma(\xi)}{\lambda^3(\tau(\xi))} d\xi dR, \\
 \hat{k}_5(t) &= \int_{R_0}^{s(t)} R \int_R^{s(t)} \frac{\psi(\tau(\xi))}{\lambda^3(\tau(\xi))} d\xi dR, & \hat{k}_6(t) &= \int_{R_0}^{s(t)} R \int_R^{s(t)} \frac{\psi(\tau(\xi)) \gamma(\xi)}{\lambda^3(\tau(\xi))} d\xi dR, \\
 \hat{k}_7(t) &= \int_{R_0}^{s(t)} R \int_R^{s(t)} \frac{\psi^2(\tau(\xi))}{\lambda^3(\tau(\xi))} d\xi dR, & \hat{k}_8(t) &= \int_{R_0}^{s(t)} R \int_R^{s(t)} \frac{\psi^2(\tau(\xi)) \gamma(\xi)}{\lambda^3(\tau(\xi))} d\xi dR.
 \end{aligned}
 \tag{3.66}$$

Thus

$$\begin{aligned}
 k'_1(t) &= \frac{u_0 s(t)}{\lambda^4(t)}, & k'_2(t) &= u_0 s(t) \lambda^2(t), & k'_3(t) &= \frac{u_0 s(t)}{\lambda^3(t)}, \\
 k'_4(t) &= \frac{u_0 \gamma(s(t))}{\lambda^3(t)}, & k'_5(t) &= \frac{u_0 \psi(t)}{\lambda^3(t)}, & k'_6(t) &= \frac{u_0 \psi(t) \gamma(s(t))}{\lambda^3(t)}, \\
 k'_7(t) &= \frac{\psi^2(t)}{\lambda^3(t)}, & k'_8(t) &= \frac{u_0 \psi^2(t) \gamma(s(t))}{\lambda^3(t)}.
 \end{aligned}
 \tag{3.67}$$

Note that⁹

$$\hat{k}'_3(t) = \frac{u_0}{2\lambda^3(t)} (s^2(t) - R_0^2).
 \tag{3.68}$$

Similarly,

$$\begin{aligned}
 \hat{k}'_4(t) &= \frac{u_0 \gamma(s(t))}{2\lambda^3(t)} (s^2(t) - R_0^2), & \hat{k}'_5(t) &= \frac{u_0 \psi(t)}{2\lambda^3(t)} (s^2(t) - R_0^2), \\
 \hat{k}'_6(t) &= \frac{u_0 \psi(t) \gamma(s(t))}{2\lambda^3(t)} (s^2(t) - R_0^2), & \hat{k}'_7(t) &= \frac{u_0 \psi^2(t)}{2\lambda^3(t)} (s^2(t) - R_0^2), \\
 \hat{k}'_8(t) &= \frac{u_0 \psi^2(t) \gamma(s(t))}{2\lambda^3(t)} (s^2(t) - R_0^2).
 \end{aligned}
 \tag{3.69}$$

⁹This is a simple application of the Leibniz integral rule:

$$\hat{k}'_3(t) = \frac{d}{dt} \int_{R_0}^{s(t)} f(t, R) dR = s'(t) f(t, s(t)) + \int_{R_0}^{s(t)} \frac{\partial f(t, R)}{\partial t} dR,$$

where

$$f(t, R) = R \int_R^{s(t)} \frac{d\xi}{\lambda^3(\tau(\xi))}.$$

Note that

$$f(t, s(t)) = s(t) \int_{s(t)}^{s(t)} \frac{d\xi}{\lambda^3(\tau(\xi))} = 0, \quad \frac{\partial f(t, R)}{\partial t} = R s'(t) \frac{1}{\lambda^3(\tau(s(t)))} = \frac{R u_0}{\lambda^3(t)}.$$

Thus

$$\hat{k}'_3(t) = \int_{R_0}^{s(t)} \frac{R u_0}{\lambda^3(t)} dR = \frac{u_0}{2\lambda^3(t)} (s^2(t) - R_0^2).$$

Note that $k_1(0) = \dots = k_8(0) = 0$, and $\hat{k}_3(0) = \dots = \hat{k}_8(0) = 0$. Therefore, we have the following system of nonlinear first-order ODEs:

$$\left\{ \begin{aligned} & \left[\lambda^2(t) - \frac{1}{\lambda^4(t)} \right] \frac{R_0^2}{2} - \frac{R_0^4 \psi^2(t)}{8\lambda^4(t)} + \lambda^2(t) k_1(t) - \frac{k_2(t)}{\lambda^4(t)} \\ & - \frac{R_0^2}{2\lambda^4(t)} \left[\psi^2(t) (R_0 k_3(t) + k_4(t)) - 2\psi(t) (R_0 k_5(t) + k_6(t)) + R_0 k_7(t) + k_8(t) \right] \\ & - \frac{1}{\lambda^4(t)} \left[\psi^2(t) (R_0 \hat{k}_3(t) + \hat{k}_4(t)) - 2\psi(t) (R_0 \hat{k}_5(t) + \hat{k}_6(t)) + R_0 \hat{k}_7(t) + \hat{k}_8(t) \right] = 0, \\ & \frac{\pi R_0^4}{2} \mu_0 \frac{\psi(t)}{\lambda(t)} + 2\pi \mu_0 R_0 [\psi(t) h_1(t) - h_2(t)] + 2\pi \mu_0 [\psi(t) h_3(t) - h_4(t)] = M(t), \\ & h'_1(t) = \frac{u_0 s^2(t)}{\lambda^5(t)}, \quad h'_2(t) = \frac{u_0 s^2(t) \psi(t)}{\lambda^5(t)}, \quad h'_3(t) = \frac{u_0 s^2(t) h_5(t)}{\lambda^5(t)}, \\ & h'_4(t) = \frac{u_0 s^2(t) \psi(t) h_5(t)}{\lambda^5(t)}, \quad h'_5(t) = u_0 \lambda(t), \\ & k'_1(t) = \frac{u_0 s(t)}{\lambda^4(t)}, \quad k'_2(t) = u_0 s(t) \lambda^2(t), \quad k'_3(t) = \frac{u_0 s(t)}{\lambda^3(t)}, \quad k'_4(t) = \frac{u_0 h_5(t)}{\lambda^3(t)}, \\ & k'_5(t) = \frac{u_0 \psi(t)}{\lambda^3(t)}, \quad k'_6(t) = \frac{u_0 \psi(t) h_5(t)}{\lambda^3(t)}, \quad k'_7(t) = \frac{u_0 \psi^2(t)}{\lambda^3(t)}, \quad k'_8(t) = \frac{u_0 \psi^2(t) h_5(t)}{\lambda^3(t)}, \\ & \hat{k}'_3(t) = \frac{u_0}{2\lambda^3(t)} (s^2(t) - R_0^2), \quad \hat{k}'_4(t) = \frac{u_0 h_5(t)}{2\lambda^3(t)} (s^2(t) - R_0^2), \\ & \hat{k}'_5(t) = \frac{u_0 \psi(t)}{2\lambda^3(t)} (s^2(t) - R_0^2), \quad \hat{k}'_6(t) = \frac{u_0 \psi(t) h_5(t)}{2\lambda^3(t)} (s^2(t) - R_0^2), \\ & \hat{k}'_7(t) = \frac{u_0 \psi^2(t)}{2\lambda^3(t)} (s^2(t) - R_0^2), \quad \hat{k}'_8(t) = \frac{u_0 \psi^2(t) h_5(t)}{2\lambda^3(t)} (s^2(t) - R_0^2), \\ & \lambda(0) = 1, \psi(0) = h_1(0) = \dots = h_5(0) = k_1(0) = \dots = k_8(0) = \hat{k}_3(0) = \dots = \hat{k}_8(0) = 0. \end{aligned} \right. \tag{3.70}$$

Let us assume that $R_0 = 1, u_0 = 1$, and $t_a = 1$. We first consider the following twist-control loadings:

$$\begin{aligned} \psi_1(t) &= \pi \sin\left(\frac{2\pi t}{t_a}\right), & \psi_2(t) &= \pi \sin^2\left(\frac{2\pi t}{t_a}\right), \\ \psi_3(t) &= \pi \sin\left(\frac{8\pi t}{t_a}\right), & \psi_4(t) &= \pi \sin^2\left(\frac{8\pi t}{t_a}\right). \end{aligned} \tag{3.71}$$

The corresponding $\lambda^2(t)$ distribution for each loading is shown in Fig. 4. Next we consider the following torque-control loadings.

$$\begin{aligned} M_1(t) &= \pi R_0^3 \sin\left(\frac{2\pi t}{t_a}\right), & M_2(t) &= \pi R_0^3 \sin^2\left(\frac{2\pi t}{t_a}\right), \\ M_3(t) &= \pi R_0^3 \sin\left(\frac{8\pi t}{t_a}\right), & M_4(t) &= \pi R_0^3 \sin^2\left(\frac{8\pi t}{t_a}\right). \end{aligned} \tag{3.72}$$

The corresponding $\lambda^2(t)$ and $\psi(t)$ distributions are shown in Fig. 5.

Remark 3.4 Note that in (3.62), $M(t)$ is a linear function of $\psi(t)$. Consequently, in (3.62) and (3.63) the transformation $\psi(t) \rightarrow -\psi(t)$ changes the sign of $M(t)$. Note also that (3.65)

Fig. 4 The axial stretch distribution for a bar under the four different twist-control loadings given in (3.71) during accretion

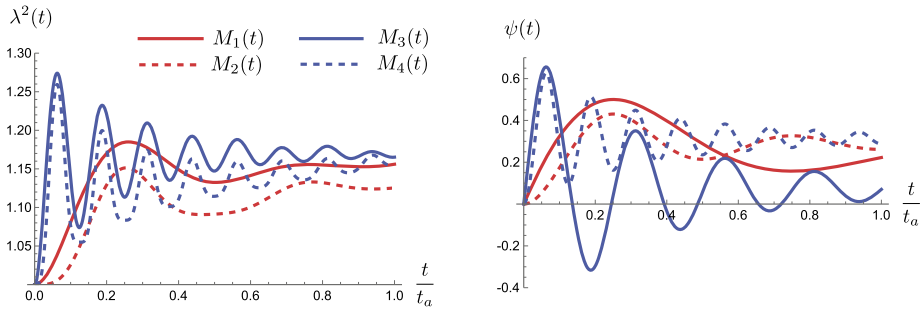
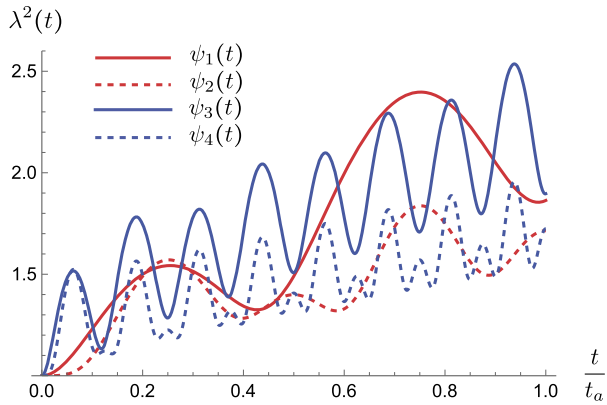


Fig. 5 The time-dependent axial stretch and twist per unit length for a bar under four different applied torques given in (3.72) during accretion

is unchanged under the transformation $\psi(t) \rightarrow -\psi(t)$. This implies that if $(\lambda(t), \psi(t))$, is a solution for $M(t)$, $t \in [0, t_a]$, then $(\lambda(t), -\psi(t))$, is a solution for $-M(t)$, $t \in [0, t_a]$. Consequently, from (3.58) and (3.59), if $\sigma^{rr}(R, t)$, $\sigma^{\theta\theta}(R, t)$, $\sigma^{zz}(R, t)$, and $\sigma^{\theta z}(R, t)$ are the stresses for $M(t)$, $t \in [0, t_a]$, then $\sigma^{rr}(R, t)$, $\sigma^{\theta\theta}(R, t)$, $\sigma^{zz}(R, t)$, and $-\sigma^{\theta z}(R, t)$ are the stresses for $-M(t)$, $t \in [0, t_a]$.

3.1 Residual Stresses

Let us assume that after the completion of accretion at time t_a the accreted body is unloaded, i.e., for $t > t_a$, $F(t) = M(t) = 0$. In this section we calculate the residual stretch $\bar{\lambda}^2$, residual twist $\bar{\psi}$, and residual stresses. The material metric of the accreted body has the following representation:

$$\begin{aligned}
 0 \leq R \leq R_0: \quad \mathbf{G} &= \begin{bmatrix} 1 & 0 & 0 \\ 0 & R^2 & 0 \\ 0 & 0 & 1 \end{bmatrix}, \\
 R_0 \leq R \leq R_a: \quad \mathbf{G} &= \begin{bmatrix} 1 & 0 & 0 \\ 0 & \bar{r}^2(R) & \psi(\tau(R))\bar{r}^2(R) \\ 0 & \psi(\tau(R))\bar{r}^2(R) & \psi^2(\tau(R))\bar{r}^2(R) + \lambda^4(\tau(R)) \end{bmatrix},
 \end{aligned} \tag{3.73}$$

where $R_a = s(t_a)$. Note that for a given loading during accretion the material manifold $(\mathcal{B}, \mathbf{G})$, where $\mathcal{B} = \mathcal{B}_{t_a}$, has already been constructed. The map from the natural configuration of the accreted body to its residually-stressed configuration with no external loads is denoted by $\tilde{\varphi} : \mathcal{B} \rightarrow \tilde{\mathcal{C}} \subset \mathcal{S}$. In cylindrical coordinates it has the representation $\tilde{\varphi}(R, \Theta, Z) = (\tilde{r}, \tilde{\theta}, \tilde{z}) = (\tilde{r}(R), \Theta + \tilde{\psi}Z, \tilde{\lambda}^2 Z)$. Using the incompressibility constraint one obtains

$$\tilde{r}(R) = \begin{cases} \frac{R}{\tilde{\lambda}}, & 0 \leq R \leq R_0, \\ \frac{R_0^2}{\tilde{\lambda}^2} + \frac{2}{\tilde{\lambda}^2} \int_{R_0}^R \tilde{r}(\xi) \lambda^2(\tau(\xi)) d\xi, & R_0 \leq R \leq R_a. \end{cases} \tag{3.74}$$

The residual Cauchy stress has the following distribution for the initial body ($0 \leq R \leq R_0$)

$$\begin{aligned} \bar{\sigma}^{rr}(R) &= -\frac{\tilde{\psi}^2}{\tilde{\lambda}^2} \int_R^{R_0} \xi \alpha(\xi) d\xi - \frac{1}{\tilde{\lambda}^2} \int_{R_0}^{R_a} \alpha(\xi) \frac{\tilde{r}(\xi)(\tilde{\psi} - \psi(\tau(\xi)))^2}{\lambda^2(\tau(\xi))} d\xi, \\ \bar{\sigma}^{\theta\theta}(R) &= -\frac{\tilde{\psi}^2}{\tilde{\lambda}^2} \int_R^{R_0} \xi \alpha(\xi) d\xi - \frac{1}{\tilde{\lambda}^2} \int_{R_0}^{R_a} \alpha(\xi) \frac{\tilde{r}(\xi)(\tilde{\psi} - \psi(\tau(\xi)))^2}{\lambda^2(\tau(\xi))} d\xi + \alpha(R) \frac{R^2 \tilde{\psi}^2}{\tilde{\lambda}^2}, \\ \bar{\sigma}^{zz}(R) &= -\frac{\tilde{\psi}^2}{\tilde{\lambda}^2} \int_R^{R_0} \xi \alpha(\xi) d\xi - \frac{1}{\tilde{\lambda}^2} \int_{R_0}^{R_a} \alpha(\xi) \frac{\tilde{r}(\xi)(\tilde{\psi} - \psi(\tau(\xi)))^2}{\lambda^2(\tau(\xi))} d\xi \\ &\quad + \alpha(R) \left[\tilde{\lambda}^4 - \frac{1}{\tilde{\lambda}^2} \right] + \beta(R) \left[\tilde{\lambda}^2 - \frac{1 + R^2 \tilde{\psi}^2}{\tilde{\lambda}^4} \right], \\ \bar{\sigma}^{\theta z}(R) &= \frac{R \tilde{\psi}}{\tilde{\lambda}} \left[\alpha(R) \tilde{\lambda}^2 + \beta(R) \right], \end{aligned} \tag{3.75}$$

and for the secondary body ($R_0 \leq R \leq R_a$)

$$\begin{aligned} \bar{\sigma}^{rr}(R) &= -\frac{1}{\tilde{\lambda}^2} \int_R^{R_a} \alpha(\xi) \frac{\tilde{r}(\xi)(\tilde{\psi} - \psi(\tau(\xi)))^2}{\lambda^2(\tau(\xi))} d\xi, \\ \bar{\sigma}^{\theta\theta}(R) &= -\frac{1}{\tilde{\lambda}^2} \int_R^{R_a} \alpha(\xi) \frac{\tilde{r}(\xi)(\tilde{\psi} - \psi(\tau(\xi)))^2}{\lambda^2(\tau(\xi))} d\xi + \frac{\alpha(R) \tilde{r}^2(R) (\tilde{\psi} - \psi(\tau(R)))^2}{\tilde{\lambda}^2 \lambda^2(\tau(R))}, \\ \bar{\sigma}^{zz}(R) &= -\frac{1}{\tilde{\lambda}^2} \int_R^{R_a} \alpha(\xi) \frac{\tilde{r}(\xi)(\tilde{\psi} - \psi(\tau(\xi)))^2}{\lambda^2(\tau(\xi))} d\xi - \frac{\beta(R) \tilde{r}^2(R) (\tilde{\psi} - \psi(\tau(R)))^2}{\tilde{\lambda}^4} \\ &\quad + \alpha(R) \left[\frac{\tilde{\lambda}^4}{\tilde{\lambda}^4(\tau(R))} - \frac{\lambda^2(\tau(R))}{\tilde{\lambda}^2} \right] + \beta(R) \left[\frac{\tilde{\lambda}^2}{\lambda^2(\tau(R))} - \frac{\lambda^4(\tau(R))}{\tilde{\lambda}^4} \right], \\ \bar{\sigma}^{\theta z}(R) &= \frac{\tilde{r}(R)(\tilde{\psi} - \psi(\tau(R)))}{\tilde{\lambda} \lambda^3(\tau(R))} \left[\alpha(R) \tilde{\lambda}^2 + \beta(R) \lambda^2(\tau) \right]. \end{aligned} \tag{3.76}$$

Table 1 Residual stretch and twist for the four different torque-control loadings given in (3.72)

	$M_1(t)$	$M_2(t)$	$M_3(t)$	$M_4(t)$
$\tilde{\lambda}^2$	1.24866	1.20544	1.26215	1.26174
$\frac{\tilde{\psi}}{\pi}$	0.18626	0.23904	0.022172	0.29500

Example 3.5 For a homogeneous neo-Hookean solid, the zero applied torque and force conditions are written as the following system of nonlinear algebraic equations

$$\begin{aligned}
 R_0^4 \frac{\tilde{\psi}}{\tilde{\lambda}} + 4R_0[\tilde{\psi} \tilde{h}_1 - \tilde{h}_2] + 4[\tilde{\psi} \tilde{h}_3 - \tilde{h}_4] &= 0, \\
 \left[\tilde{\lambda}^2 - \frac{1}{\tilde{\lambda}^4} \right] \frac{R_0^2}{2} - \frac{R_0^4 \tilde{\psi}^2}{8\tilde{\lambda}^4} + \tilde{\lambda}^2 \tilde{k}_1 - \frac{\tilde{k}_2}{\tilde{\lambda}^4} \\
 - \frac{R_0^2}{2\tilde{\lambda}^4} \left[\tilde{\psi}^2 (R_0 \tilde{k}_3 + \tilde{k}_4) - 2\tilde{\psi} (R_0 \tilde{k}_5 + \tilde{k}_6) + R_0 \tilde{k}_7 + \tilde{k}_8 \right] \\
 - \frac{1}{\tilde{\lambda}^4} \left[\tilde{\psi}^2 (R_0 \tilde{k}_3 + \tilde{k}_4) - 2\tilde{\psi} (R_0 \tilde{k}_5 + \tilde{k}_6) + R_0 \tilde{k}_7 + \tilde{k}_8 \right] &= 0,
 \end{aligned}
 \tag{3.77}$$

where $\tilde{h}_i = h_i(t_a)$, $i = 1, \dots, 4$, $\tilde{k}_i = k_i(t_a)$, $i = 1, \dots, 8$, and $\tilde{\hat{k}}_i = \hat{k}_i(t_a)$, $i = 3, \dots, 8$.

For $R_0 = 1$, $u_0 = 1$, and $t_a = 1$, the residual twists and stretches for the four applied torques (3.72) are given in Table 1. The residual Cauchy stress components have the following distributions. For $0 \leq R \leq R_0$:

$$\begin{aligned}
 \bar{\sigma}^{rr}(R) &= -\mu_0 \frac{\tilde{\psi}^2}{\tilde{\lambda}^2} \frac{R_0^2 - R^2}{2} - \frac{\mu_0}{\tilde{\lambda}^2} \int_{R_0}^{R_a} \frac{\bar{r}(\xi)(\tilde{\psi} - \psi(\tau(\xi)))^2}{\lambda^2(\tau(\xi))} d\xi, \\
 \bar{\sigma}^{\theta\theta}(R) &= -\mu_0 \frac{\tilde{\psi}^2}{\tilde{\lambda}^2} \frac{R_0^2 - R^2}{2} - \frac{\mu_0}{\tilde{\lambda}^2} \int_{R_0}^{R_a} \frac{\bar{r}(\xi)(\tilde{\psi} - \psi(\tau(\xi)))^2}{\lambda^2(\tau(\xi))} d\xi + \mu_0 \frac{R^2 \tilde{\psi}^2}{\tilde{\lambda}^2}, \\
 \bar{\sigma}^{zz}(R) &= -\mu_0 \frac{\tilde{\psi}^2}{\tilde{\lambda}^2} \frac{R_0^2 - R^2}{2} - \frac{\mu_0}{\tilde{\lambda}^2} \int_{R_0}^{R_a} \frac{\bar{r}(\xi)(\tilde{\psi} - \psi(\tau(\xi)))^2}{\lambda^2(\tau(\xi))} d\xi + \mu_0 \left[\tilde{\lambda}^4 - \frac{1}{\tilde{\lambda}^2} \right], \\
 \bar{\sigma}^{\theta z}(R) &= \mu_0 \tilde{\psi} \tilde{\lambda} R.
 \end{aligned}
 \tag{3.78}$$

For $R_0 \leq R \leq R_a$:

$$\begin{aligned}
 \bar{\sigma}^{rr}(R) &= -\frac{\mu_0}{\tilde{\lambda}^2} \int_R^{R_a} \frac{\bar{r}(\xi)(\tilde{\psi} - \psi(\tau(\xi)))^2}{\lambda^2(\tau(\xi))} d\xi, \\
 \bar{\sigma}^{\theta\theta}(R) &= -\frac{\mu_0}{\tilde{\lambda}^2} \int_R^{R_a} \frac{\bar{r}(\xi)(\tilde{\psi} - \psi(\tau(\xi)))^2}{\lambda^2(\tau(\xi))} d\xi + \frac{\mu_0 \bar{r}^2(R) (\tilde{\psi} - \psi(\tau(R)))^2}{\tilde{\lambda}^2 \lambda^2(\tau(R))}, \\
 \bar{\sigma}^{zz}(R) &= -\frac{\mu_0}{\tilde{\lambda}^2} \int_R^{R_a} \frac{\bar{r}(\xi)(\tilde{\psi} - \psi(\tau(\xi)))^2}{\lambda^2(\tau(\xi))} d\xi + \mu_0 \left[\frac{\tilde{\lambda}^4}{\lambda^4(\tau(R))} - \frac{\lambda^2(\tau(R))}{\tilde{\lambda}^2} \right], \\
 \bar{\sigma}^{\theta z}(R) &= \mu_0 \frac{\tilde{\lambda} \bar{r}(R) (\tilde{\psi} - \psi(\tau(R)))}{\lambda^3(\tau(R))}.
 \end{aligned}
 \tag{3.79}$$

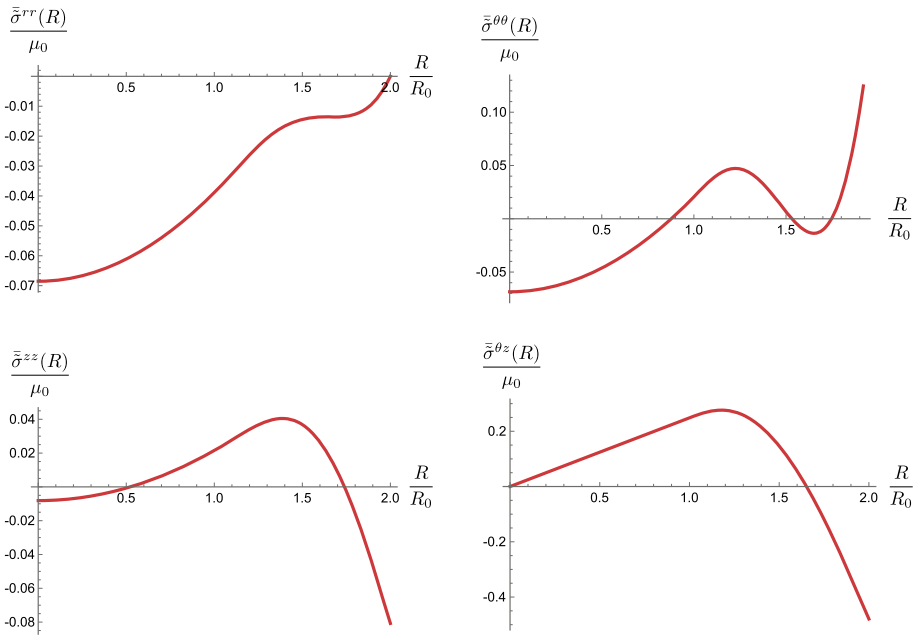


Fig. 6 Residual stresses in a bar under the applied torque $M(t) = 2\pi R_0^3 (\frac{t}{t_a})^3$ during accretion

For $R_0 = 1$, $u_0 = 1$, and $t_a = 1$, in Fig. 6 we show the residual stress distributions for the loading $M(t) = 2\pi R_0^3 (\frac{t}{t_a})^3$. It is observed that the shear stress is an order of magnitude larger than the normal stresses.

3.2 Linearized Accretion Mechanics

In this section we linearize the governing equations of the nonlinear accretion theory and find those of the linearized accretion mechanics. We assume that linearization is with respect to an undeformed stress-free configuration of the bar. More precisely, let us consider a reference motion $\hat{\varphi}_t$, and a one-parameter family of motions $\varphi_{t,\epsilon}$ such that $\varphi_{t,0} = \hat{\varphi}_t$ [20, 32, 49]. For the combined torsion and extension of a bar we consider the following one-parameter family of motions

$$\varphi_\epsilon(R, \Theta, Z, t) = (r_\epsilon(R, t), \Theta + \psi_\epsilon(t)Z, \lambda_\epsilon^2(t)Z). \tag{3.80}$$

We will linearize the governing equations with respect to the reference motion $\hat{\varphi}_t(R, \Theta, Z, t) = (R, \Theta, Z)$, which corresponds to the motion of a cylindrical bar that is under no external forces or torques while stress-free cylindrical layers are added to its boundary in the time interval $[0, t_a]$. The variation field is defined as

$$\delta\varphi_t(R, \Theta, Z) = \left. \frac{d}{d\epsilon} \right|_{\epsilon=0} \varphi_\epsilon(R, \Theta, Z, t) = (\delta r(R, t), \delta\psi(t)Z, 2\delta\lambda(t)Z). \tag{3.81}$$

From

$$\delta r(R, t) = \left. \frac{d}{d\epsilon} \right|_{\epsilon=0} r_\epsilon(R, t), \tag{3.82}$$

one concludes that $\delta\bar{r}(R) = \delta r\left(R, \frac{R-R_0}{u_0}\right)$. The displacement field is defined as

$$\mathbf{U}(R, \Theta, Z, t) = \delta\varphi_t(R, \Theta, Z) - \delta\varphi_{\tau(R)}(R, \Theta, Z). \tag{3.83}$$

Assuming that $\psi(0) = 0$ and $\lambda(0) = 1$, for the initial body ($0 \leq R \leq R_0$), $\varphi_\epsilon(R, \Theta, Z, 0) = (r_\epsilon(R, 0), \Theta, Z) = (R, \Theta, Z)$, and hence $\delta\varphi_0(R, \Theta, Z) = (0, 0, 0)$. Thus, for $0 \leq R \leq R_0$, $\mathbf{U}(R, \Theta, Z, t) = \delta\varphi_t(R, \Theta, Z)$. However, for the new material points ($R_0 \leq R \leq s(t) = R_0 + u_0t$) the displacement field is defined with respect to their positions at the time of attachment.

Linearized Kinematics For $0 \leq R \leq R_0$, the incompressibility condition for the perturbed motion is written as $\lambda_\epsilon^2(t) r_\epsilon(R, t) r'_\epsilon(R, t) / R = 1$, which along with $r_\epsilon(0, t) = 0$, implies that

$$r_\epsilon(R, t) = \frac{R}{\lambda_\epsilon(t)}, \quad 0 \leq R \leq R_0. \tag{3.84}$$

Taking derivative with respect to ϵ on both sides, evaluating at $\epsilon = 0$, and noting that $\lambda_{\epsilon=0}(t) = 1$, one obtains

$$\delta r(R, t) = -R \delta\lambda(t). \tag{3.85}$$

Knowing that $\lambda_\epsilon(0) = 1$, $\delta\lambda(0) = 0$, and hence $\delta r(R, 0) = 0$.

For $R_0 \leq R \leq s(t)$:

$$r_\epsilon(R, t) = \frac{1}{\lambda_\epsilon(t)} \left[R_0 + \int_{R_0}^R \lambda_\epsilon(\tau(\xi)) d\xi \right]. \tag{3.86}$$

Thus

$$\delta r(R, t) = -R \delta\lambda(t) + \int_{R_0}^R \delta\lambda(\tau(\xi)) d\xi. \tag{3.87}$$

Linearized Stresses For $0 \leq R \leq R_0$, one has

$$\begin{aligned} \bar{\sigma}_\epsilon^{rr}(R, t) &= -\mu_0 \frac{\psi_\epsilon^2(t)}{\lambda_\epsilon^2(t)} \frac{R_0^2 - R^2}{2} - \frac{\mu_0}{\lambda_\epsilon^2(t)} \int_{R_0}^{s(t)} \frac{\bar{r}_\epsilon(\xi)(\psi_\epsilon(t) - \psi_\epsilon(\tau(\xi)))^2}{\lambda_\epsilon^2(\tau(\xi))} d\xi, \\ \bar{\sigma}_\epsilon^{\theta\theta}(R, t) &= -\mu_0 \frac{\psi_\epsilon^2(t)}{\lambda_\epsilon^2(t)} \frac{R_0^2 - R^2}{2} - \frac{\mu_0}{\lambda_\epsilon^2(t)} \int_{R_0}^{s(t)} \frac{\bar{r}_\epsilon(\xi)(\psi_\epsilon(t) - \psi_\epsilon(\tau(\xi)))^2}{\lambda_\epsilon^2(\tau(\xi))} d\xi \\ &\quad + \mu_0 \frac{R^2 \psi_\epsilon^2(t)}{\lambda_\epsilon^2(t)}, \\ \bar{\sigma}_\epsilon^{zz}(R, t) &= -\mu_0 \frac{\psi_\epsilon^2(t)}{\lambda_\epsilon^2(t)} \frac{R_0^2 - R^2}{2} - \frac{\mu_0}{\lambda_\epsilon^2(t)} \int_{R_0}^{s(t)} \frac{\bar{r}_\epsilon(\xi)(\psi_\epsilon(t) - \psi_\epsilon(\tau(\xi)))^2}{\lambda_\epsilon^2(\tau(\xi))} d\xi \\ &\quad + \mu_0 \left[\lambda_\epsilon^4(t) - \frac{1}{\lambda_\epsilon^2(t)} \right], \\ \bar{\sigma}_\epsilon^{\theta z}(R, t) &= \mu_0 R \psi_\epsilon(t) \lambda_\epsilon(t). \end{aligned} \tag{3.88}$$

For $R_0 \leq R \leq s(t)$:

$$\begin{aligned}
 \bar{\sigma}_\epsilon^{rr}(R, t) &= -\frac{\mu_0}{\lambda_\epsilon^2(t)} \int_R^{s(t)} \frac{\bar{r}_\epsilon(\xi)(\psi_\epsilon(t) - \psi_\epsilon(\tau(\xi)))^2}{\lambda_\epsilon^2(\tau(\xi))} d\xi, \\
 \bar{\sigma}_\epsilon^{\theta\theta}(R, t) &= -\frac{\mu_0}{\lambda_\epsilon^2(t)} \int_R^{s(t)} \frac{\bar{r}_\epsilon(\xi)(\psi_\epsilon(t) - \psi_\epsilon(\tau(\xi)))^2}{\lambda_\epsilon^2(\tau(\xi))} d\xi + \mu_0 \frac{\bar{r}_\epsilon^2(R)(\psi_\epsilon(t) - \psi_\epsilon(\tau(R)))^2}{\lambda_\epsilon^2(t) \lambda_\epsilon^2(\tau(R))}, \\
 \bar{\sigma}_\epsilon^{zz}(R, t) &= -\frac{\mu_0}{\lambda_\epsilon^2(t)} \int_R^{s(t)} \frac{\bar{r}_\epsilon(\xi)(\psi_\epsilon(t) - \psi_\epsilon(\tau(\xi)))^2}{\lambda_\epsilon^2(\tau(\xi))} d\xi + \mu_0 \left[\frac{\lambda_\epsilon^4(t)}{\lambda_\epsilon^4(\tau(R))} - \frac{\lambda_\epsilon^2(\tau(R))}{\lambda_\epsilon^2(t)} \right], \\
 \bar{\sigma}_\epsilon^{\theta z}(R, t) &= \mu_0 \frac{\bar{r}_\epsilon(R)(\psi_\epsilon(t) - \psi_\epsilon(\tau(R)))}{\lambda_\epsilon^3(\tau(R))} \lambda_\epsilon(t).
 \end{aligned}
 \tag{3.89}$$

Thus, for $0 \leq R \leq R_0$:

$$\begin{aligned}
 \delta \bar{\sigma}^{rr}(R, t) &= \delta \bar{\sigma}^{\theta\theta}(R, t) = 0, \\
 \delta \bar{\sigma}^{zz}(R, t) &= 6\mu_0 \delta \lambda(t), \\
 \delta \bar{\sigma}^{\theta z}(R, t) &= \mu_0 R \delta \psi(t),
 \end{aligned}
 \tag{3.90}$$

and for $R_0 \leq R \leq s(t)$:

$$\begin{aligned}
 \delta \bar{\sigma}^{rr}(R, t) &= \delta \bar{\sigma}^{\theta\theta}(R, t) = 0, \\
 \delta \bar{\sigma}^{zz}(R, t) &= 6\mu_0 [\delta \lambda(t) - \delta \lambda(\tau(R))], \\
 \delta \bar{\sigma}^{\theta z}(R, t) &= \mu_0 R [\delta \psi(t) - \delta \psi(\tau(R))].
 \end{aligned}
 \tag{3.91}$$

For the perturbed motion (3.62) reads

$$\begin{aligned}
 M_\epsilon(t) &= \frac{\pi R_0^4}{2} \mu_0 \frac{\psi_\epsilon(t)}{\lambda_\epsilon(t)} + 2\pi \mu_0 R_0 \left[\psi_\epsilon(t) \int_{R_0}^{s(t)} \frac{R^2}{\lambda_\epsilon^5(\tau(R))} dR - \int_{R_0}^{s(t)} \frac{R^2 \psi_\epsilon(\tau(R))}{\lambda_\epsilon^5(\tau(R))} dR \right] \\
 &+ 2\pi \mu_0 \left[\psi_\epsilon(t) \int_{R_0}^{s(t)} \frac{R^2 \gamma_\epsilon(R)}{\lambda_\epsilon^5(\tau(R))} dR - \int_{R_0}^{s(t)} \frac{R^2 \psi_\epsilon(\tau(R)) \gamma_\epsilon(R)}{\lambda_\epsilon^5(\tau(R))} dR \right],
 \end{aligned}
 \tag{3.92}$$

where $\gamma_\epsilon(R) = \int_{R_0}^R \lambda_\epsilon(\tau(\xi)) d\xi$. Notice that $\gamma_{\epsilon=0}(R) = \int_{R_0}^R d\xi = R - R_0$. Thus

$$\begin{aligned}
 \frac{\delta M(t)}{2\pi \mu_0} &= \frac{R_0^4}{4} \delta \psi(t) + \delta \psi(t) R_0 \int_{R_0}^{s(t)} R^2 dR - R_0 \int_{R_0}^{s(t)} R^2 \delta \psi(\tau(R)) dR \\
 &+ \delta \psi(t) \int_{R_0}^{s(t)} R^2 (R - R_0) dR - \int_{R_0}^{s(t)} R^2 (R - R_0) \delta \psi(\tau(R)) dR \\
 &= \frac{R_0^4}{4} \delta \psi(t) + \delta \psi(t) R_0 \frac{s^3(t) - R_0^3}{3} - R_0 \int_{R_0}^{s(t)} R^2 \delta \psi(\tau(R)) dR
 \end{aligned}
 \tag{3.93}$$

$$\begin{aligned}
 & + \frac{\delta\psi(t)}{12} (3s^4(t) - 4R_0s^3(t) + R_0^4) - \int_{R_0}^{s(t)} R^2(R - R_0) \delta\psi(\tau(R)) dR \\
 & = \frac{s^4(t)}{4} \delta\psi(t) - R_0 \int_{R_0}^{s(t)} R^2 \delta\psi(\tau(R)) dR - \int_{R_0}^{s(t)} R^2(R - R_0) \delta\psi(\tau(R)) dR.
 \end{aligned}$$

Taking time derivative of both sides one finds

$$\frac{\dot{\delta M}(t)}{2\pi\mu_0} = \frac{s^4(t)}{4} \dot{\delta\psi(t)}. \tag{3.94}$$

Knowing that $\delta\psi(0) = 0$, one obtains

$$\delta\psi(t) = \frac{2}{\pi\mu_0} \int_0^t \frac{\dot{\delta M}(x)}{s^4(x)} dx. \tag{3.95}$$

Similarly, for the perturbed motion (3.65) reads

$$\begin{aligned}
 & \left[\lambda_{\epsilon}^2(t) - \frac{1}{\lambda_{\epsilon}^4(t)} \right] \frac{R_0^2}{2} - \frac{R_0^4 \psi_{\epsilon}^2(t)}{8\lambda_{\epsilon}^4(t)} + \lambda_{\epsilon}^2(t) k_{1\epsilon}(t) - \frac{k_{2\epsilon}(t)}{\lambda_{\epsilon}^4(t)} \\
 & - \frac{R_0^2}{2\lambda_{\epsilon}^4(t)} \left[\psi_{\epsilon}^2(t) (R_0 k_{3\epsilon}(t) + k_{4\epsilon}(t)) - 2\psi_{\epsilon}(t) (R_0 k_{5\epsilon}(t) + k_{6\epsilon}(t)) + R_0 k_{7\epsilon}(t) + k_{8\epsilon}(t) \right] \\
 & - \frac{1}{\lambda_{\epsilon}^4(t)} \left[\psi_{\epsilon}^2(t) (R_0 \hat{k}_{3\epsilon}(t) + \hat{k}_{4\epsilon}(t)) - 2\psi_{\epsilon}(t) (R_0 \hat{k}_{5\epsilon}(t) + \hat{k}_{6\epsilon}(t)) + R_0 \hat{k}_{7\epsilon}(t) + \hat{k}_{8\epsilon}(t) \right] = 0,
 \end{aligned} \tag{3.96}$$

where

$$\begin{aligned}
 k_{1\epsilon}(t) &= \int_{R_0}^{s(t)} \frac{R}{\lambda_{\epsilon}^4(\tau(R))} dR, & k_{2\epsilon}(t) &= \int_{R_0}^{s(t)} R \lambda_{\epsilon}^2(\tau(R)) dR, \\
 k_{3\epsilon}(t) &= \int_{R_0}^{s(t)} \frac{R}{\lambda_{\epsilon}^3(\tau(R))} dR, & k_{4\epsilon}(t) &= \int_{R_0}^{s(t)} \frac{\gamma_{\epsilon}(R)}{\lambda_{\epsilon}^3(\tau(R))} dR, \\
 k_{5\epsilon}(t) &= \int_{R_0}^{s(t)} \frac{\psi_{\epsilon}(\tau(R))}{\lambda_{\epsilon}^3(\tau(R))} dR, & k_{6\epsilon}(t) &= \int_{R_0}^{s(t)} \frac{\psi_{\epsilon}(\tau(R)) \gamma_{\epsilon}(R)}{\lambda_{\epsilon}^3(\tau(R))} dR, \\
 k_{7\epsilon}(t) &= \int_{R_0}^{s(t)} \frac{\psi_{\epsilon}^2(\tau(R))}{\lambda_{\epsilon}^3(\tau(R))} dR, & k_{8\epsilon}(t) &= \int_{R_0}^{s(t)} \frac{\psi_{\epsilon}^2(\tau(R)) \gamma_{\epsilon}(R)}{\lambda_{\epsilon}^3(\tau(R))} dR, \\
 \hat{k}_{3\epsilon}(t) &= \int_{R_0}^{s(t)} \int_R^{s(t)} \frac{\xi}{\lambda_{\epsilon}^3(\tau(\xi))} d\xi dR, & \hat{k}_{4\epsilon}(t) &= \int_{R_0}^{s(t)} \int_R^{s(t)} \frac{\gamma_{\epsilon}(\xi)}{\lambda_{\epsilon}^3(\tau(\xi))} d\xi dR, \\
 \hat{k}_{5\epsilon}(t) &= \int_{R_0}^{s(t)} \int_R^{s(t)} \frac{\psi_{\epsilon}(\tau(\xi))}{\lambda_{\epsilon}^3(\tau(\xi))} d\xi dR, & \hat{k}_{6\epsilon}(t) &= \int_{R_0}^{s(t)} \int_R^{s(t)} \frac{\psi_{\epsilon}(\tau(\xi)) \gamma_{\epsilon}(\xi)}{\lambda_{\epsilon}^3(\tau(\xi))} d\xi dR, \\
 \hat{k}_{7\epsilon}(t) &= \int_{R_0}^{s(t)} \int_R^{s(t)} \frac{\psi_{\epsilon}^2(\tau(\xi))}{\lambda_{\epsilon}^3(\tau(\xi))} d\xi dR, & \hat{k}_{8\epsilon}(t) &= \int_{R_0}^{s(t)} \int_R^{s(t)} \frac{\psi_{\epsilon}^2(\tau(\xi)) \gamma_{\epsilon}(\xi)}{\lambda_{\epsilon}^3(\tau(\xi))} d\xi dR.
 \end{aligned} \tag{3.97}$$

Thus, linearizing (3.96), one obtains

$$s^2(t) \delta\lambda(t) = 2 \int_{R_0}^{s(t)} R \delta\lambda(\tau(R)) dR. \tag{3.98}$$

Taking time derivative of both sides one obtains $s^2(t) \overline{\delta\dot{\lambda}(t)} = 0$, and hence $\overline{\delta\dot{\lambda}(t)} = 0$. Knowing that $\delta\lambda(0) = 0$, one concludes that $\delta\lambda(t) = 0$. Therefore, the only nonzero linearized stress has the following distribution:

$$\delta\bar{\sigma}^{\theta z}(R, t) = \begin{cases} \mu_0 R \delta\psi(t), & 0 \leq R \leq R_0, \\ \mu_0 R [\delta\psi(t) - \delta\psi(\tau(R))], & R_0 \leq R \leq s(t). \end{cases} \tag{3.99}$$

Or

$$\delta\bar{\sigma}^{\theta z}(R, t) = \begin{cases} \frac{2R}{\pi} \int_0^t \frac{\overline{\delta\dot{M}(x)}}{s^4(x)} dx, & 0 \leq R \leq R_0, \\ \frac{2R}{\pi} \left[\int_0^t \frac{\overline{\delta\dot{M}(x)}}{s^4(x)} dx - \int_0^{\tau(R)} \frac{\overline{\delta\dot{M}(x)}}{s^4(x)} dx \right], & R_0 \leq R \leq s(t). \end{cases} \tag{3.100}$$

This can equivalently be written as

$$\delta\bar{\sigma}^{\theta z}(R, t) = \begin{cases} \frac{2R}{\pi} \int_0^t \frac{\overline{\delta\dot{M}(x)}}{s^4(x)} dx, & 0 \leq R \leq R_0, \\ \frac{2R}{\pi} \int_{\tau(R)}^t \frac{\overline{\delta\dot{M}(x)}}{s^4(x)} dx, & R_0 \leq R \leq s(t). \end{cases} \tag{3.101}$$

Linearized Residual Stresses Linearizing the zero-force condition (3.77)₂, one finds $\delta\tilde{\lambda} = 0$. Similarly, linearizing the zero-torque condition (3.77)₁, one obtains

$$\delta\tilde{\psi} = \frac{8}{\pi \mu_0 R_a^4} \int_{R_0}^{R_a} \xi^3 \int_0^{\tau(\xi)} \frac{\overline{\delta\dot{M}(x)}}{s^4(x)} dx d\xi. \tag{3.102}$$

The only nonzero linearized residual stress has the following distribution:

$$\delta\bar{\sigma}^{\theta z}(R) = \begin{cases} \mu_0 R \delta\tilde{\psi}, & 0 \leq R \leq R_0, \\ \mu_0 R [\delta\tilde{\psi} - \delta\psi(\tau(R))], & R_0 \leq R \leq R_a, \end{cases} \tag{3.103}$$

or

$$\delta\bar{\sigma}^{\theta z}(R) = \begin{cases} \frac{8R}{\pi R_a^4} \int_{R_0}^{R_a} \xi^3 \int_0^{\tau(\xi)} \frac{\overline{\delta\dot{M}(x)}}{s^4(x)} dx d\xi, & 0 \leq R \leq R_0, \\ \frac{8R}{\pi R_a^4} \int_{R_0}^{R_a} \xi^3 \int_0^{\tau(\xi)} \frac{\overline{\delta\dot{M}(x)}}{s^4(x)} dx d\xi - \frac{2R}{\pi} \int_0^{\tau(R)} \frac{\overline{\delta\dot{M}(x)}}{s^4(x)} dx, & R_0 \leq R \leq R_a. \end{cases} \tag{3.104}$$

For $R_0 = 1$, $u_0 = 1$, and $t_a = 1$, in Fig. 7 the residual shear stress and the linearized residual shear stress distributions for the loading $M(t) = k\pi R_0^3 \sin\left(\frac{2\pi t}{t_a}\right)$ and four different values of

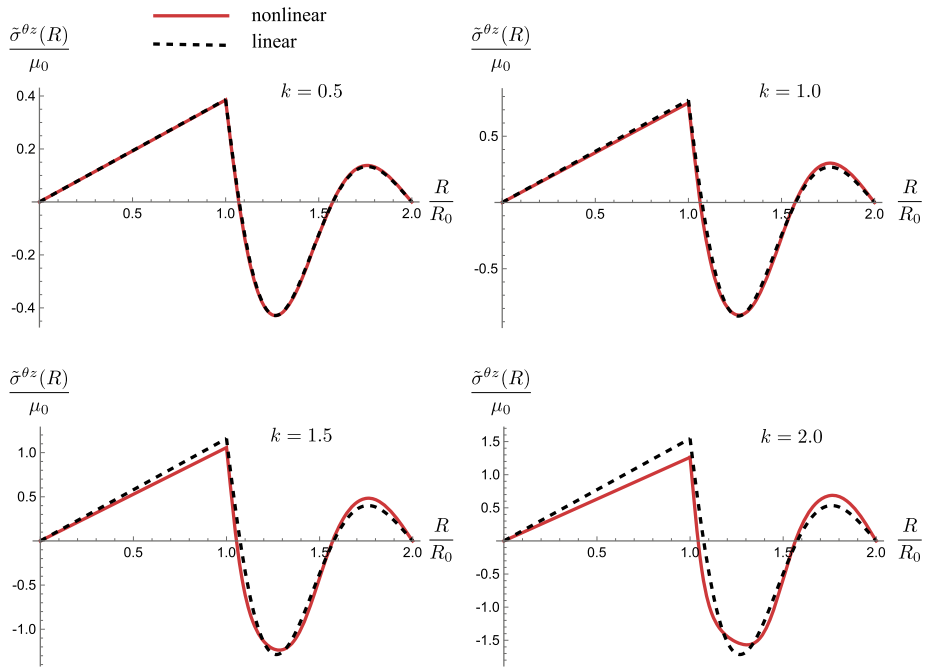


Fig. 7 Residual shear stress and linearized residual shear stress for the loading $M(t) = k\pi R_0^3 \sin(\frac{2\pi t}{a})$ for four different values of k

k are shown. As expected, as k increases the difference between the nonlinear and linear solutions increases.

4 Conclusions

In this paper, we formulated the initial-boundary-value problem of finite torsion and extension of an accreting circular cylindrical bar. The bar is assumed to be homogeneous and is made of an arbitrary incompressible isotropic solid. It is also assumed that accretion is symmetric, i.e., the accreting bar is a solid circular cylinder at all times. Assuming a generalized Family 3 kinematics (3.2), we showed that radial deformation is a functional of the time-dependent axial stretch $\lambda^2(t)$, see (3.56)₁. Assuming that stress-free material is added to the boundary of the deforming bar (generalizing our analysis to the case of pre-stressed material is straightforward), we calculated the material metric of the accreting bar. We noted that this metric is unique up to isometry. The kinematics is completely specified as soon as the time-dependent axial stretch $\lambda^2(t)$ and the twist per unit length $\psi(t)$ are known. The applied torque $M(t)$ and the axial force $F(t)$ explicitly depend on these two functions. We assumed that there is no applied axial force, i.e., $F(t) = 0$; the bar is free to deform axially. We considered both twist-control ($\psi(t)$ is given) and torque-control ($M(t)$ is given) loadings. We calculated the corresponding stresses. It was observed that the kinematics (3.2) together with its corresponding material metric are universal for incompressible isotropic solids (see Remark 3.2) in the sense that equilibrium equations are satisfied in the absence of body forces and for any energy function $W(I_1, I_2)$. We also calculated the residual stresses that

are induced by accretion. Finally, we calculated the deformations and stresses in the setting of linear accretion mechanics by linearizing the nonlinear fields. The nonlinear and linear solutions were numerically compared in a few examples. As expected, as the applied torque increases the difference between the linear and nonlinear solutions becomes more appreciable.

The analysis presented in this paper can be extended to inhomogeneous and anisotropic bars. In the case of incompressible transversely isotropic, orthotropic, and monoclinic solids, we expect the kinematics ansatz given in (3.2) to be universal for circular cylindrical bars with the universal material preferred directions found in [47]. We also suspect that for either isotropic or the three anisotropy classes (transversely isotropic, orthotropic, and monoclinic solids), the cylindrical bar can have radial inhomogeneity, i.e., its energy function can explicitly depend on the radial coordinate: $W = W(R, I_1, I_2)$ [44, 48].

Acknowledgement This research was partially supported by NSF – Grant No. CMMI 1939901, and ARO Grant No. W911NF-18-1-0003.

Author contributions The authors contributed equally to this paper.

Declarations

Competing interests The authors declare no competing interests.

References

1. Abi-Akl, R., Cohen, T.: Surface growth on a deformable spherical substrate. *Mech. Res. Commun.* **103**, 103457 (2020)
2. Abi-Akl, R., Abeyaratne, R., Cohen, T.: Kinetics of surface growth with coupled diffusion and the emergence of a universal growth path. *Proc. R. Soc. A* **475**(2221), 20180465 (2019)
3. Arutyunyan, N.K., Naumov, V., Radaev, Y.N.: A mathematical model of a dynamically accreted deformable body. Part 1: kinematics and measure of deformation of the growing body. *Izv. Akad. Nauk SSSR, Meh. Tverd. Tela* **6**, 85–96 (1990)
4. Bergel, G.L., Papadopoulos, P.: A finite element method for modeling surface growth and resorption of deformable solids. *Comput. Mech.* **68**(4), 759–774 (2021)
5. Brown, C., Goodman, L.: Gravitational stresses in accreted bodies. *Proc. R. Soc. Lond. A*, **276**, 571–576 (1963)
6. Doyle, T.C., Ericksen, J.L.: Nonlinear elasticity. *Adv. Appl. Mech.* **4**, 53–115 (1956)
7. Drozdov, A.D.: Continuous accretion of a composite cylinder. *Acta Mech.* **128**(1) (1998)
8. Drozdov, A.D.: *Viscoelastic Structures: Mechanics of Growth and Aging*. Academic Press, San Diego (1998)
9. Ericksen, J.L.: Deformations possible in every isotropic, incompressible, perfectly elastic body. *Z. Angew. Math. Phys.* **5**(6), 466–489 (1954)
10. Goodbrake, C., Yavari, A., Goriely, A.: The anelastic Ericksen problem: universal deformations and universal eigenstrains in incompressible nonlinear anelasticity. *J. Elast.* **142**(2), 291–381 (2020)
11. Hodge, N., Papadopoulos, P.: A continuum theory of surface growth. *Proc. R. Soc. Lond. A* **466**(2123), 3135–3152 (2010)
12. Klingbeil, W.W., Shield, R.T.: On a class of solutions in plane finite elasticity. *Z. Angew. Math. Phys.* **17**(4), 489–511 (1966)
13. Kondurov, V., Nikitin, L.: Finite strains of viscoelastic muscle tissue. *J. Appl. Math. Mech.* **51**(3), 346–353 (1987)
14. Lychev, S.: Universal deformations of growing solids. *Mech. Solids* **46**(6), 863–876 (2011)
15. Lychev, S., Manzhiriv, A.: The mathematical theory of growing bodies. *Finite deformations. J. Appl. Math. Mech.* **77**(4), 421–432 (2013)
16. Lychev, S., Manzhiriv, A.: Reference configurations of growing bodies. *Mech. Solids* **48**(5), 553–560 (2013)

17. Lychev, S., Koifman, K., Djuzhev, N.: Incompatible deformations in additively fabricated solids: discrete and continuous approaches. *Symmetry* **13**(12), 2331 (2021)
18. Manzhairov, A.: The general non-inertial initial-boundaryvalue problem for a viscoelastic ageing solid with piecewise-continuous accretion. *J. Appl. Math. Mech.* **59**(5), 805–816 (1995)
19. Manzhairov, A.V.: Mechanics of growing solids: New track in mechanical engineering. In: ASME 2014 International Mechanical Engineering Congress and Exposition, p. V009T12A039. American Society of Mechanical Engineers, Montreal, Quebec, Canada (2014)
20. Marsden, J., Hughes, T.: *Mathematical Foundations of Elasticity*. Dover, New York (1983)
21. Metlov, V.: On the accretion of inhomogeneous viscoelastic bodies under finite deformations. *J. Appl. Math. Mech.* **49**(4), 490–498 (1985)
22. Naumov, V.E.: Mechanics of growing deformable solids: a review. *J. Eng. Mech.* **120**(2), 207–220 (1994)
23. Ogden, R.W.: *Non-linear Elastic Deformations*. Dover, New York (1984)
24. Ong, J.J., O'Reilly, O.M.: On the equations of motion for rigid bodies with surface growth. *Int. J. Eng. Sci.* **42**(19), 2159–2174 (2004)
25. Poincaré, H.: *Science and Hypothesis*. The Walter Scott Publishing Company, New York (1905)
26. Rodriguez, E.K., Hoger, A., McCulloch, A.D.: Stress-dependent finite growth in soft elastic tissues. *J. Biomech.* **27**(4), 455–467 (1994)
27. Sadik, S., Yavari, A.: On the origins of the idea of the multiplicative decomposition of the deformation gradient. *Math. Mech. Solids* **22**(4), 771–772 (2017)
28. Simo, J., Marsden, J.: Stress tensors, Riemannian metrics and the alternative descriptions in elasticity. In: *Trends and Applications of Pure Mathematics to Mechanics*, pp. 369–383. Springer, Berlin (1984)
29. Singh, M., Pipkin, A.C.: Note on Ericksen's problem. *Z. Angew. Math. Phys.* **16**(5), 706–709 (1965)
30. Skalak, R., Farrow, D., Hoger, A.: Kinematics of surface growth. *J. Math. Biol.* **35**(8), 869–907 (1997)
31. Southwell, R.: *Introduction to the Theory of Elasticity for Engineers and Physicists*. Oxford University Press, London (1941)
32. Sozio, F., Yavari, A.: Nonlinear mechanics of surface growth for cylindrical and spherical elastic bodies. *J. Mech. Phys. Solids* **98**, 12–48 (2017)
33. Sozio, F., Yavari, A.: Nonlinear mechanics of accretion. *J. Nonlinear Sci.* **29**(4), 1813–1863 (2019)
34. Sozio, F., Faghih Shojaei, M., Sadik, S., Yavari, A.: Nonlinear mechanics of thermoelastic accretion. *Z. Angew. Math. Phys.* **71**(3), 1–24 (2020)
35. Takamizawa, K.: Stress-free configuration of a thick-walled cylindrical model of the artery: an application of Riemann geometry to the biomechanics of soft tissues. *J. Appl. Mech.* **58**(3), 840–842 (1991)
36. Takamizawa, K., Hayashi, K.: Strain energy density function and uniform strain hypothesis for arterial mechanics. *J. Biomech.* **20**(1), 7–17 (1987)
37. Takamizawa, K., Matsuda, T.: Kinematics for bodies undergoing residual stress and its applications to the left ventricle. *J. Appl. Mech.* **57**(2), 321–329 (1990)
38. Tomassetti, G., Cohen, T., Abeyaratne, R.: Steady accretion of an elastic body on a hard spherical surface and the notion of a four-dimensional reference space. *J. Mech. Phys. Solids* **96**, 333–352 (2016)
39. Tranquillo, R.T., Murray, J.D.: Continuum model of fibroblast-driven wound contraction: inflammation-mediation. *J. Theor. Biol.* **158**(2), 135–172 (1992)
40. Tranquillo, R.T., Murray, J.: Mechanistic model of wound contraction. *J. Surg. Res.* **55**(2), 233–247 (1993)
41. Truesdell, C.: The physical components of vectors and tensors. *Z. Angew. Math. Mech.* **33**(10–11), 345–356 (1953)
42. Truskinovsky, L., Zurlo, G.: Nonlinear elasticity of incompatible surface growth. *Phys. Rev. B* **99**(5), 053001 (2019)
43. Yavari, A.: A geometric theory of growth mechanics. *J. Nonlinear Sci.* **20**(6), 781–830 (2010)
44. Yavari, A.: Universal deformations in inhomogeneous isotropic nonlinear elastic solids. *Proc. R. Soc. A* **477**(2253), 20210547 (2021)
45. Yavari, A., Goriely, A.: Riemann-Cartan geometry of nonlinear dislocation mechanics. *Arch. Ration. Mech. Anal.* **205**(1), 59–118 (2012)
46. Yavari, A., Goriely, A.: The twist-fit problem: Finite torsional and shear eigenstrains in nonlinear elastic solids. *Proc. R. Soc. Lond. A* **471**(2183) (2015)
47. Yavari, A., Goriely, A.: Universal deformations in anisotropic nonlinear elastic solids. *J. Mech. Phys. Solids* **156**, 104598 (2021)
48. Yavari, A., Goriely, A.: The universal program of nonlinear hyperelasticity. *J. Elast.*, 1–56 (2022)
49. Yavari, A., Ozakin, A.: Covariance in linearized elasticity. *Z. Angew. Math. Phys.* **59**(6), 1081–1110 (2008)
50. Yavari, A., Sozio, F.: On the direct and reverse multiplicative decompositions of deformation gradient in nonlinear anisotropic anelasticity. *J. Mech. Phys. Solids* **170**, 105101 (2022)

51. Yavari, A., Safa, Y., Soleiman Fallah, A.: Finite extension of accreting nonlinear elastic solid circular cylinders (2022)
52. Zurlo, G., Truskinovsky, L.: Printing non-Euclidean solids. *Phys. Rev. Lett.* **119**(4), 048001 (2017)
53. Zurlo, G., Truskinovsky, L.: Inelastic surface growth. *Mech. Res. Commun.* **93**, 174–179 (2018)

Publisher's Note Springer Nature remains neutral with regard to jurisdictional claims in published maps and institutional affiliations.

Springer Nature or its licensor (e.g. a society or other partner) holds exclusive rights to this article under a publishing agreement with the author(s) or other rightsholder(s); author self-archiving of the accepted manuscript version of this article is solely governed by the terms of such publishing agreement and applicable law.