

Research



Cite this article: Pradhan SP, Yavari A. 2023
Accretion–ablation mechanics. *Phil. Trans. R.
Soc. A* **381**: 20220373.
<https://doi.org/10.1098/rsta.2022.0373>

Received: 1 June 2023

Accepted: 9 August 2023

One contribution of 11 to a theme issue
'Foundational issues, analysis and geometry
in continuum mechanics'.

Subject Areas:

mechanical engineering, applied
mathematics, geometry, mathematical
physics, mechanics

Keywords:

accretion, ablation, surface growth, nonlinear
elasticity, residual stress, geometric mechanics

Author for correspondence:

Arash Yavari

e-mail: arash.yavari@ce.gatech.edu

Accretion–ablation mechanics

Satya Prakash Pradhan¹ and Arash Yavari^{1,2}

¹School of Civil and Environmental Engineering, and ²The George W. Woodruff School of Mechanical Engineering, Georgia Institute of Technology, Atlanta, GA 30332, USA

AY, 0000-0002-7088-7984

In this paper, we formulate a geometric nonlinear theory of the mechanics of accreting–ablating bodies. This is a generalization of the theory of accretion mechanics of Sozio & Yavari (Sozio & Yavari 2019 *J. Nonlinear Sci.* **29**, 1813–1863 (doi:10.1007/s00332-019-09531-w)). More specifically, we are interested in large deformation analysis of bodies that undergo a continuous and simultaneous accretion and ablation on their boundaries while under external loads. In this formulation, the natural configuration of an accreting–ablating body is a time-dependent Riemannian 3-manifold with a metric that is an unknown *a priori* and is determined after solving the accretion–ablation initial-boundary-value problem. In addition to the time of attachment map, we introduce a time of detachment map that along with the time of attachment map, and the accretion and ablation velocities, describes the time-dependent reference configuration of the body. The kinematics, material manifold, material metric, constitutive equations and the balance laws are discussed in detail. As a concrete example and application of the geometric theory, we analyse a thick hollow circular cylinder made of an arbitrary incompressible isotropic material that is under a finite time-dependent extension while undergoing continuous ablation on its inner cylinder boundary and accretion on its outer cylinder boundary. The state of deformation and stress during the accretion–ablation process, and the residual stretch and stress after the completion of the accretion–ablation process, are computed.

This article is part of the theme issue 'Foundational issues, analysis and geometry in continuum mechanics'.

1. Introduction

There are numerous examples of structures in Nature and engineering that are built through an accretion process and/or during their lifetime experience ablation. As examples in Nature one can mention growth of biological tissues and crystals, formation of planetary objects, volcanic and sedimentary rock formations, snow and ice cover build-up, glacier accumulation and ablation, etc. As engineering applications, one can mention additive manufacturing and three-dimensional printing, metal solidification, construction of concrete structures in successive layers, construction of masonry structures, the deposition of thin films, ice accretion on an aircraft wing that may lead to degradation of aerodynamic performance, laser ablation of polymers, etc.

The first accretion mechanics problem was solved by Southwell [1], namely the analysis of thick-walled cylinders manufactured by wire winding of an initial elastic tube. The problem of a growing planet subject to self-gravity was studied in a seminal paper by Brown & Goodman [2]. Their analysis was done in the setting of linear elasticity and it was observed that accretion may induce residual stresses. In the seminal work of Skalak *et al.* [3,4], the kinematics of surface growth was formulated and a time of attachment map was introduced. Another notable work is the paper of Metlov [5], who formulated a large-deformation theory of ageing viscoelastic solids undergoing accretion. He also introduced a time of attachment map as part of the kinematic description of accretion. There have been many more works on the mechanics of surface growth in the literature [6–28], see [21,29] for more detailed reviews.

In classical nonlinear elasticity, the reference configuration is a fixed manifold (a fixed set of material points equipped with a metric inherited from the Euclidean ambient space). Motion is a one-parameter family of maps from the fixed reference configuration to the Euclidean ambient space. In anelasticity (in the sense of Eckart [30]), the reference configuration is a fixed manifold equipped with a metric that explicitly depends on the source of anelasticity, e.g. temperature changes, swelling, bulk growth, remodelling, defects, etc. In this more general setting, motion is still a map from the fixed reference configuration to the Euclidean ambient space. However, the natural distances in the reference configuration are measured using the non-flat metric of the material manifold. Theory of anelasticity has been used in modelling a very large class of problems, e.g. thermoelasticity [31–33], mechanics of distributed defects [34–39], swelling and cavitation [40–44] and bulk growth [45–48]. Anelasticity has traditionally been formulated using the multiplicative decomposition of deformation gradient into an elastic and an anelastic part: $\mathbf{F} = \mathbf{F}^e \mathbf{F}^a$.¹ This leads to the notion of the so-called ‘intermediate configuration’, which is usually defined only locally.² A more natural approach would be to follow Eckart [30] and Kondo [52,53] and use a Riemannian material manifold, which is a fixed manifold with a possibly time-dependent metric if the source of anelasticity is time dependent [54].³ For example, in the case of bodies undergoing bulk growth the reference configuration is a Riemannian manifold $(\mathcal{B}, \mathbf{G}_t)$, where \mathcal{B} is a fixed 3-manifold with a time-dependent Riemannian metric \mathbf{G}_t [48].

For accreting–ablating bodies, the set of material points is time-dependent; the reference configuration is a time-dependent set \mathcal{B}_t . In the absence of any other anelastic source, the initial body \mathcal{B}_0 has a flat metric \mathbf{G}_0 that is inherited from the Euclidean ambient space (the induced Euclidean metric). A point on the boundary of the body is either non-active or active. At an active point of the boundary and at a given time t there is either accretion (addition of new material) or ablation (removal of material); accretion and ablation cannot occur simultaneously at the same point and at the same time. Stress-free or pre-stressed material can be added on the accretion boundary. The material metric is controlled by both the state of stress of the material before joining

¹For detailed historical accounts of this decomposition, see [49,50].

²See [50,51] for discussions on global intermediate configurations (manifolds).

³Anelastic bodies are non-Euclidean in the sense that their reference configurations are not Euclidean, in general. The term *Non-Euclidean solids* has been used interchangeably for anelastic bodies in the recent literature [25,27,28] (this term was coined by Henri Poincaré [55]). Also, anelastic plates have been called *non-Euclidean plates* in the literature [56].

the body and the state of deformation of the body at the time of attachment. It is known that accretion may induce residual stresses due to the non-flatness of the material metric [21,22], and this is the nonlinear analogue of Brown & Goodman [2]'s observation.

Most of the existing works in the literature of surface growth mechanics are restricted to accretion problems without ablation. Exceptions are [9,57,58]. Naghibzadeh *et al.* [57] considered both accretion and ablation in a Eulerian large-deformation setting and analysed accretion and ablation problems without explicitly using an evolving reference configuration. They used the governing equations in a Eulerian setting with \mathbf{F}^e (the elastic part of the deformation gradient) as their kinematic descriptor. They recovered some of the results from [21] in their Eulerian formulation for an infinite thick hollow cylinder accreting on its outer surface with a hydrostatic pressure applied on its inner surface. They also analysed a thick hollow spherical shell undergoing accretion through its fixed inner boundary while ablation takes place on its traction-free outer boundary.

Recently, the nonlinear geometric accretion theory developed in [21,22] was used to solve two classes of problems: (i) time-dependent finite extension of incompressible isotropic accreting circular cylindrical bars [26] and (ii) time-dependent finite torsion of incompressible isotropic accreting circular cylindrical bars [59]. In the absence of accretion, these deformations are subsets of Family 3 universal deformations [60]. It was shown that even in the presence of cylindrically symmetric accretion these deformations are universal [26,59].

Let us consider a body in a time-dependent motion. This body while undergoing large deformations is simultaneously growing on part of its boundary by absorbing mass while it is losing mass on another part of its boundary. We are interested in understanding the mechanics of such accreting–ablating systems. There are four questions that any mechanical/mathematical model of accretion–ablation should be able to answer:

- (i) What is the state of deformation and stresses during a process of accretion–ablation?
- (ii) At the end of an accretion–ablation process and after removing the external loads, what is the state of deformation and internal stresses (residual stresses) in the body?
- (iii) Now the final structure is put under service loads. How can one analyse such a residually stressed structure?
- (iv) How should an accretion–ablation process be designed in order to build structures with the desired distribution of residual stresses, and the optimum stiffness/compliance under service loads?

In the second part of this paper, we show how our theory can be used in answering the first three questions. The fourth problem will be studied in a future communication.

This paper is organized as follows. In §2, a geometric theory of accretion–ablation mechanics is formulated. The kinematics, material manifold, material metric, constitutive equations and the balance laws are discussed in detail. An example is analysed in detail in §3 as an application of the geometric theory. More specifically, a thick hollow cylinder under finite time-dependent extension while undergoing simultaneous accretion and ablation is analysed. Both displacement and force-control loadings are considered. The state of deformation and stress during accretion–ablation and the effect of loading during accretion–ablation on the residual stress distribution are analysed. Several numerical examples are presented in the case of incompressible neo-Hookean solids. The conclusion is given in §4.

2. A continuum theory of accreting–ablating bodies

In this section, we formulate a large-deformation continuum theory of accreting–ablating bodies. This theory is a generalization of the accretion theory of Sozio & Yavari [22]. More specifically, we are interested in the state of deformation and internal stresses of a body that while under external loads undergoes simultaneous ablation and accretion on its boundary, see figure 1.

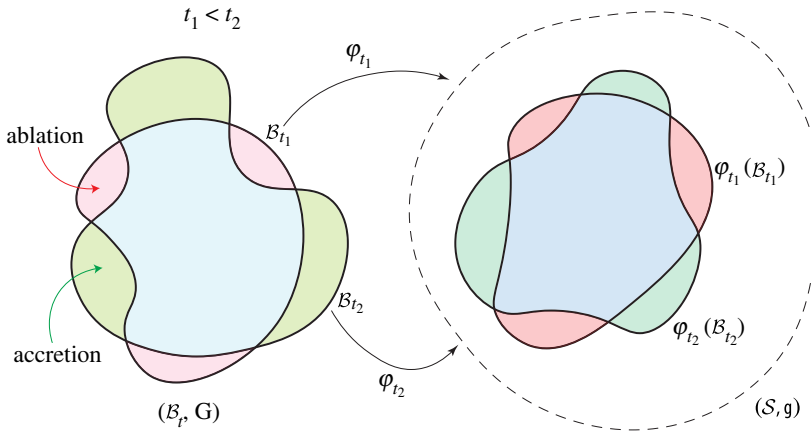


Figure 1. Motion of an accreting–ablating elastic body. The material manifold is a time-dependent Riemannian manifold $(\mathcal{B}_t, \mathbf{G})$ whose metric is to be determined. The deformed body is embedded in the Euclidean ambient space $(\mathcal{S}, \mathbf{g})$, where \mathbf{g} is a time-independent background metric.

(a) Riemannian geometry and kinematics of finite deformations

In this section, we tersely review some basic concepts of Riemannian geometry that are used in the description of the kinematics of accreting–ablating bodies. A smooth 3-manifold \mathcal{B} is a topological space that locally looks like the three-dimensional Euclidean space \mathbb{R}^3 . A coordinate chart $\{X^A\} : \mathcal{B} \rightarrow \mathbb{R}^3$ is a local diffeomorphism. The body in its reference configuration is identified with the 3-manifold \mathcal{B} . The tangent space of \mathcal{B} at a point $X \in \mathcal{B}$ is a three-dimensional linear space and is denoted by $T_X\mathcal{B}$. The three-dimensional Euclidean ambient space is denoted by \mathcal{S} . A local chart on \mathcal{S} is denoted by $\{x^a\}$. Motion $\varphi_t : \mathcal{B} \rightarrow \mathcal{S}$ is a one-parameter family of smooth, invertible and orientation preserving maps between the reference configuration and the ambient space (more precisely, motion is a curve $t \mapsto \varphi_t$ in the space of all configurations of \mathcal{B}). The derivative (tangent) map of φ_t is denoted by $\mathbf{F}_t = T\varphi_t$, and is a two-point tensor, i.e. is a linear map between tangent spaces of two different manifolds, $\mathbf{F}(X, t) : T_X\mathcal{B} \rightarrow T_x\mathcal{C}_t$, where $x = \varphi(X)$ and $\mathcal{C}_t = \varphi_t(\mathcal{B})$. In the continuum mechanics literature \mathbf{F} is called deformation gradient. This term may be misleading as gradient is a metric-dependent operator while the tangent map is not. With respect to the local coordinate charts $\{X^A\}$ and $\{x^a\}$ for \mathcal{B} and \mathcal{S} , respectively, deformation gradient has the following representation:

$$\mathbf{F} = F^a_A \frac{\partial}{\partial x^a} \otimes dX^A \quad \text{and} \quad F^a_A = \frac{\partial \varphi^a}{\partial X^A}. \quad (2.1)$$

The set of vectors $\{\partial/\partial x^a\}$ and co-vectors (1-forms) $\{dX^A\}$ are bases for the tangent space $T_x\mathcal{C}$ and co-tangent space $T^*_x\mathcal{B}$, respectively. A smooth vector field on \mathcal{B} is a smooth assignment of vectors (elements of the tangent space) to points of \mathcal{B} . Thus, for a smooth vector field \mathbf{W} on \mathcal{B} , $\mathbf{W}_X \in T_X\mathcal{B}$, $X \mapsto \mathbf{W}_X \in T_X\mathcal{B}$ varies smoothly. Push-forward of a vector field on \mathcal{B} by the deformation mapping is a vector field in the ambient space and is defined as $\varphi_*\mathbf{W} = T\varphi \cdot \mathbf{W} \circ \varphi^{-1}$. Pull-back of a vector field \mathbf{w} on $\mathcal{C} = \varphi(\mathcal{B})$ is a vector field on \mathcal{B} and is defined as $\varphi^*\mathbf{w} = T(\varphi^{-1}) \cdot \mathbf{w} \circ \varphi$. The push-forward and pull-back of vectors have the following coordinate representations: $(\varphi_*\mathbf{W})^a = F^a_A W^A$, and $(\varphi^*\mathbf{w})^A = F_a^{-A} w^a$.

A bilinear map $\mathbf{T} : T_X\mathcal{B} \times T_X\mathcal{B} \rightarrow \mathbb{R}$ is a $\binom{0}{2}$ -tensor at $X \in \mathcal{B}$. In a local coordinate chart $\{X^A\}$ for \mathcal{B} and arbitrary vectors \mathbf{U} and \mathbf{W} , one writes $\mathbf{T}(\mathbf{U}, \mathbf{W}) = T_{AB} U^A W^B$. Let us consider an inner product \mathbf{G}_X on the tangent space $T_X\mathcal{B}$ that varies smoothly, i.e. if \mathbf{U} and \mathbf{W} are vector fields on \mathcal{B} , then $X \mapsto \mathbf{G}_X(\mathbf{U}_X, \mathbf{W}_X)$ is a smooth function. A positive-definite bilinear form \mathbf{G} is called a metric. The inner product induced by the metric \mathbf{G}_X is denoted by $\langle\langle \cdot, \cdot \rangle\rangle_{\mathbf{G}_X}$. The manifold \mathcal{B} equipped with a smooth metric \mathbf{G} is called a Riemannian manifold and is denoted as $(\mathcal{B}, \mathbf{G})$. Distances in the

ambient space are calculated using the background Euclidean metric \mathbf{g} . The Riemannian manifold $(\mathcal{S}, \mathbf{g})$ is called the ambient space manifold. In elasticity, the reference configuration inherits a flat metric \mathbf{G}_0 from the ambient space and the material manifold $(\mathcal{B}, \mathbf{G}_0)$ is flat. In anelasticity, the natural distances explicitly depend on the source of anelasticity and so does the material metric \mathbf{G} , which is non-flat, in general. For the two Riemannian manifolds $(\mathcal{B}, \mathbf{G})$ and $(\mathcal{C}, \mathbf{g})$, and the deformation mapping $\varphi: \mathcal{B} \rightarrow \mathcal{C}$, push-forward of the metric \mathbf{G} is denoted by $\varphi_*\mathbf{G}$, which is a metric on $\mathcal{C} = \varphi(\mathcal{B})$, and is defined as

$$\langle\langle \mathbf{u}_x, \mathbf{w}_x \rangle\rangle_{(\varphi_*\mathbf{G})_x} = \langle\langle (\varphi^*\mathbf{u})_X, (\varphi^*\mathbf{w})_X \rangle\rangle_{\mathbf{G}_X}, \quad (2.2)$$

where $x = \varphi(X)$. It has components $(\varphi_*\mathbf{G})_{ab} = F_a^{-A} F_b^{-B} G_{AB}$. Similarly, the pull-back of the metric \mathbf{g} is denoted by $\varphi^*\mathbf{g}$ and is a metric in $\varphi^{-1}(\mathcal{C}) = \mathcal{B}$ defined as

$$\langle\langle \mathbf{U}_X, \mathbf{W}_X \rangle\rangle_{(\varphi^*\mathbf{g})_X} = \langle\langle (\varphi_*\mathbf{U})_x, (\varphi_*\mathbf{W})_x \rangle\rangle_{\mathbf{g}_x}. \quad (2.3)$$

It has components, $(\varphi^*\mathbf{g})_{AB} = F^A_a F^B_b g_{ab}$. The two Riemannian manifolds $(\mathcal{B}, \mathbf{G})$ and $(\mathcal{C}, \mathbf{g})$ are called isometric if $\mathbf{G} = \varphi^*\mathbf{g}$, or equivalently, $\mathbf{g} = \varphi_*\mathbf{G}$. In this case, φ is called an isometry.

The adjoint of deformation gradient $\mathbf{F}^*(X, t): T_x^*\mathcal{C}_t \rightarrow T_X^*\mathcal{B}$ is defined such that

$$\langle \alpha, \mathbf{F}\mathbf{W} \rangle = \langle \mathbf{F}^*\alpha, \mathbf{W} \rangle, \quad \forall \mathbf{W} \in T_X\mathcal{B}, \alpha \in T_x^*\mathcal{C}_t, \quad (2.4)$$

where $\langle \cdot, \cdot \rangle$ is the natural pairing of 1-forms and vectors, e.g. $\langle \alpha, \mathbf{w} \rangle = \alpha_a w^a$, and $T_X^*\mathcal{B}$ and $T_x^*\mathcal{C}_t$ are the co-tangent spaces of \mathcal{B} at X and \mathcal{C}_t at x , respectively. \mathbf{F}^* has the following coordinate representation

$$\mathbf{F}^*(X, t) = \frac{\partial \varphi^a(X, t)}{\partial X^A} dX^A \otimes \frac{\partial}{\partial x^a}. \quad (2.5)$$

The transpose of the deformation gradient $\mathbf{F}^\top(X, t): T_x\mathcal{C}_t \rightarrow T_X\mathcal{B}$ is defined such that

$$\langle\langle \mathbf{F}\mathbf{U}, \mathbf{w} \rangle\rangle_{\mathbf{g}} = \langle\langle \mathbf{U}, \mathbf{F}^\top\mathbf{w} \rangle\rangle_{\mathbf{G}}, \quad \forall \mathbf{U} \in T_X\mathcal{B}, \mathbf{w} \in T_x\mathcal{C}_t. \quad (2.6)$$

It has the components $(\mathbf{F}^\top)^A_a = G^{AB} F^b_B g_{ba}$, or $\mathbf{F}^\top = \mathbf{G}^\sharp \mathbf{F}^*\mathbf{g}$.

The Jacobian of deformation $J(X, t)$ relates the undeformed and deformed volume elements as $dv \circ \varphi(X, t) = J(X, t) dV(X, t)$.⁴ It is defined as

$$J(X, t) = \sqrt{\frac{\det \mathbf{g}(\varphi(X, t))}{\det \mathbf{G}(X)}} \det \mathbf{F}(X, t). \quad (2.8)$$

For incompressible materials, $J(X, t) = 1$.

The material velocity is defined as $\mathbf{V}(X, t) = \partial \varphi(X, t) / \partial t \in T_{\varphi_t(X)}\mathcal{C}_t$. The spatial velocity is defined as $\mathbf{v}_t(x) = \mathbf{V}_t \circ \varphi_t^{-1}(x) \in T_x\mathcal{C}_t$, where $x = \varphi_t(X)$. The material acceleration is defined as $\mathbf{A}(X, t) = D_t^{\mathbf{g}}\mathbf{V}(X, t) = \nabla_{\mathbf{V}(X, t)}^{\mathbf{g}}\mathbf{V}(X, t) \in T_{\varphi_t(X)}\mathcal{C}_t$, where $D_t^{\mathbf{g}}$ is the covariant derivative along the curve $\varphi_t(X)$ in \mathcal{C}_t . In components, $A^a = (\partial V^a / \partial t) + \gamma^a_{bc} V^b V^c$. The spatial acceleration is defined as $\mathbf{a}_t(x) = \mathbf{A}_t \circ \varphi_t^{-1}(x) \in T_x\mathcal{C}_t$. It has components, $a^a = (\partial v^a / \partial t) + (\partial v^a / \partial x^b) v^b + \gamma^a_{bc} v^b v^c$. Equivalently, the spatial acceleration is the material time derivative of \mathbf{v} , i.e. $\mathbf{a} = \dot{\mathbf{v}} = (\partial \mathbf{v} / \partial t) + \nabla_{\mathbf{v}}^{\mathbf{g}}\mathbf{v}$.

(b) Kinematics of accreting–ablating bodies

Consider an initial stress-free body \mathcal{B}_0 that inherits the (flat) metric \mathbf{G}_0 from the Euclidean ambient space. The boundary of the initial body is partitioned as $\partial \mathcal{B}_0 = \overset{+}{\Omega}_0 \sqcup \overset{-}{\Omega}_0 \sqcup \Pi_0$, where $\overset{+}{\Omega}_0$, $\overset{-}{\Omega}_0$ and Π_0 are the accretion, ablation and inactive parts of the boundary, respectively, and \sqcup denotes the disjoint union of sets (figure 2). It should be noted that \mathcal{B}_0 is the initial body prior to the onset

⁴Any Riemannian manifold has a natural volume form. For the Riemannian manifolds $(\mathcal{B}, \mathbf{G})$ and $(\mathcal{C}, \mathbf{g})$, the volume 3-forms are denoted by $\mu_{\mathbf{G}}$ and $\mu_{\mathbf{g}}$, respectively. With respect to the coordinate charts $\{X^A\}$ and $\{x^a\}$ for \mathcal{B} and \mathcal{C} , respectively, they have the following representations

$$\mu_{\mathbf{G}} = \sqrt{\det \mathbf{G}} dX^1 \wedge dX^2 \wedge dX^3 \quad \text{and} \quad \mu_{\mathbf{g}} = \sqrt{\det \mathbf{g}} dx^1 \wedge dx^2 \wedge dx^3, \quad (2.7)$$

where \wedge is the wedge product of differential forms. In terms of the volume forms, the Jacobian is defined as $\varphi^*\mu_{\mathbf{g}} = J\mu_{\mathbf{G}}$.




Figure 2. An initial body \mathcal{B}_0 in the material ambient space \mathcal{M} and partitioning of its boundary into accretion, ablation and inactive surfaces.

of accretion–ablation, $\bar{\Omega}_0^+$ represents the portion of $\partial\mathcal{B}_0$ where accretion is about to occur, and $\bar{\Omega}_0^-$ comprises the points that are about to leave once the process starts at $t=0$. In other words, as soon as accretion–ablation begins, the body ceases to be the set \mathcal{B}_0 ; the points on $\bar{\Omega}_0^-$ leave and new points are attached onto $\bar{\Omega}_0^+$.

Let $\mathcal{M} \supset \mathcal{B}_0$ be a connected and orientable 3-manifold with boundary embeddable in \mathbb{R}^3 . This is called the *material ambient space*. The accretion–ablation process occurs in the time interval $t \in [0, T]$, where T is the final time. Let us define a time of attachment map $\bar{\tau}^+ : (\mathcal{M} \setminus \mathcal{B}_0) \cup \bar{\Omega}_0^+ \rightarrow [0, T]$ and a time of detachment map $\bar{\tau}^- : \bar{\mathcal{A}}_T \subset \mathcal{M} \rightarrow [0, T]$, where $\bar{\mathcal{A}}_T$ is the subset of \mathcal{M} that is ablated in the time interval $[0, T]$. Note that $\bar{\tau}^{+-1}(0) = \bar{\Omega}_0^+$, and $\bar{\tau}^{-1}(0) = \bar{\Omega}_0^-$. Let us define the reference configuration at time t as

$$\mathcal{B}_t := (\mathcal{B}_0 \cup \bar{\tau}^{+-1}(0, t]) \setminus \bar{\tau}^{-1}[0, t), \quad \forall t \in [0, T], \quad (2.9)$$

which is constructed by removing all the points that have been ablated out before time t from the union of \mathcal{B}_0 and the points accreted onto \mathcal{B}_0 up to time t .⁵ It is assumed that the differentials $d\bar{\tau}^+$ and $d\bar{\tau}^-$ never vanish. Let us introduce the level sets

$$\bar{\Omega}_t^+ = \bar{\tau}^{+-1}(t), \quad \bar{\Omega}_t^- = \bar{\tau}^{-1}(t), \quad t \in [0, T], \quad (2.10)$$

and define

$$\bar{\mathcal{A}}_t^+ = \bigcup_{\bar{\tau}^+ \in [0, t]} \bar{\Omega}_{\bar{\tau}^+}^+ \quad \text{and} \quad \bar{\mathcal{A}}_t^- = \bigcup_{\bar{\tau}^- \in [0, t]} \bar{\Omega}_{\bar{\tau}^-}^-, \quad t \in [0, T]. \quad (2.11)$$

It is assumed that $\bar{\Omega}_t^+$ and $\bar{\Omega}_t^-$ are 2-manifolds. It is also assumed that all $\bar{\Omega}_t^+$'s are diffeomorphic to $\bar{\Omega}_0^+$ and all $\bar{\Omega}_t^-$'s are diffeomorphic to $\bar{\Omega}_0^-$.⁶ Since accretion and ablation cannot take place at a given point and at the same time, it is required that

$$\bar{\Omega}_t^+ \cap \bar{\Omega}_t^- = \emptyset, \quad \forall t \in [0, T]. \quad (2.12)$$

⁵Note that $\bar{\tau}^{+-1}[0, T] = \bar{\tau}^{+-1}(0) \cup \bar{\tau}^{+-1}(0, T] = \bar{\Omega}_0^+ \cup (\mathcal{M} \setminus \mathcal{B}_0) = \mathcal{M} \setminus (\text{int } \mathcal{B}_0 \cup \bar{\Omega}_0^- \cup \Pi_0)$, and $\bar{\tau}^{-1}(0, T] = \bar{\tau}^{-1}[0, T] \setminus \bar{\tau}^{-1}(0) = \bar{\mathcal{A}}_T \setminus \bar{\Omega}_0^-$.

⁶Clearly, this is a restrictive assumption. One way to remove this restriction is to divide the analysis into time intervals in which there is no change in the topology of either $\bar{\Omega}_t^+$ or $\bar{\Omega}_t^-$.

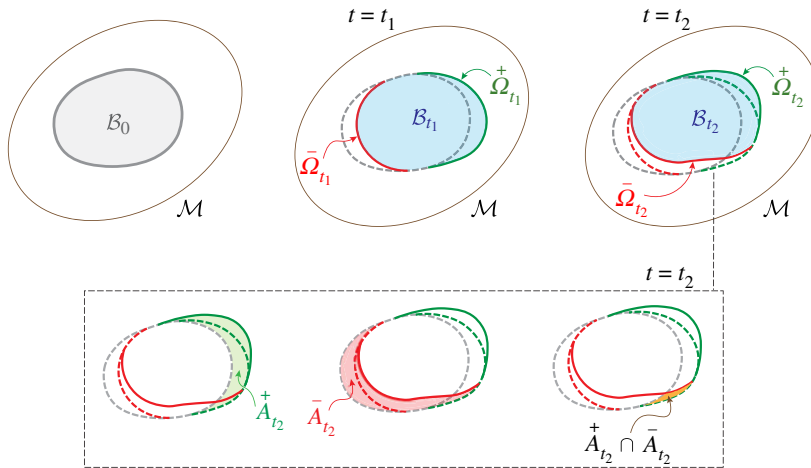


Figure 3. The material manifold is shown at times t_1 and t_2 where $t_1 < t_2$. The accretion boundaries are shown in green and the ablation boundaries are shown in red. It should be noted that the set of all those points that have been ablated until time t_2 may include points other than those in the initial body.

It should be emphasized that the intersection $\overset{+}{\mathcal{A}}_t \cap \bar{\mathcal{A}}_t$ may be non-empty,⁷ see figure 3. Note that $\mathcal{M} = (\overset{+}{\mathcal{A}}_T \setminus \overset{+}{\Omega}_0) \cup \mathcal{B}_0$, and

$$\mathcal{B}_t = (\mathcal{B}_0 \cup (\overset{+}{\mathcal{A}}_t \setminus \overset{+}{\Omega}_0)) \setminus (\bar{\mathcal{A}}_t \setminus \bar{\Omega}_t), \quad t \in [0, T]. \quad (2.13)$$

The deformation mapping $\varphi_t : \mathcal{B}_t \rightarrow \mathcal{C}_t$ is assumed to be a C^1 homeomorphism for each t , where $\mathcal{C}_t = \varphi_t(\mathcal{B}_t)$ is the current configuration of the accreting–ablating body. The deformed level sets are defined as $\overset{+}{\omega}_t = \varphi_t(\overset{+}{\Omega}_t)$, and $\bar{\omega}_t = \varphi_t(\bar{\Omega}_t)$. We denote the non-active portion of the boundary by $\Pi_t = \partial \mathcal{B}_t \setminus (\overset{+}{\Omega}_t \cup \bar{\Omega}_t)$ in the reference configuration and $\pi_t = \varphi_t(\Pi_t)$ in the deformed configuration, so that

$$\partial \varphi_t(\mathcal{B}_t) = \varphi_t(\overset{+}{\Omega}_t \cup \bar{\Omega}_t \cup \Pi_t) = \overset{+}{\omega}_t \cup \bar{\omega}_t \cup \pi_t. \quad (2.14)$$

For $X \in \mathcal{M}$ and $\overset{+}{\tau}(X) \leq t < \bar{\tau}(X)$, denote $\varphi(X, t) = \varphi_t(X)$. Let us define the following two time-independent maps

$$\overset{+}{\varphi}(X) := \varphi(X, \overset{+}{\tau}(X)) \quad \text{and} \quad \bar{\varphi}(X) := \varphi(X, \bar{\tau}(X)), \quad (2.15)$$

where $\overset{+}{\varphi}$ is defined on $\overset{+}{\mathcal{A}}_T$ and $\bar{\varphi}$ is defined on $\bar{\mathcal{A}}_T$. Note that for $t \in [0, T]$

$$\overset{+}{\varphi}(\overset{+}{\mathcal{A}}_t) = \bigcup_{\overset{+}{\tau} \in [0, t]} \overset{+}{\omega}_{\overset{+}{\tau}} \quad \text{and} \quad \bar{\varphi}(\bar{\mathcal{A}}_t) = \bigcup_{\bar{\tau} \in [0, t]} \bar{\omega}_{\bar{\tau}}. \quad (2.16)$$

It should be noted that $\overset{+}{\varphi}$ and $\bar{\varphi}$ need not be injective. Next, we define the following two-point tensors

$$\overset{+}{\mathbf{F}}(X) := \mathbf{F}(X, \overset{+}{\tau}(X)) \quad \text{and} \quad \bar{\mathbf{F}}(X) := \mathbf{F}(X, \bar{\tau}(X)), \quad (2.17)$$

⁷For a point $X \in \overset{+}{\mathcal{A}}_t \cap \bar{\mathcal{A}}_t$, which is accreted and subsequently ablated out, $\overset{+}{\tau}(X) < \bar{\tau}(X)$. This also implies that as soon as a layer has been ablated it cannot be reattached to the body.

and call them the accretion and ablation *frozen deformation gradients*, respectively. The derivative maps $T\overset{+}{\phi}$ and $T\bar{\phi}$ are neither injective nor invertible, in general. They are related to $\overset{+}{\mathbf{F}}$ and $\bar{\mathbf{F}}$ as

$$\left. \begin{aligned} (T\overset{+}{\phi})^i_j &= \frac{\partial \varphi^i(X, \overset{+}{\tau}(X))}{\partial X^j} = F^i_j(X, \overset{+}{\tau}(X)) + V^i(X, \overset{+}{\tau}(X)) \frac{\partial \overset{+}{\tau}(X)}{\partial X^j} = \overset{+}{F}_j + \overset{+}{V}^i \frac{\partial \overset{+}{\tau}}{\partial X^j}, \\ (T\bar{\phi})^i_j &= \bar{F}^i_j + \bar{V}^i \frac{\partial \bar{\tau}}{\partial X^j}, \end{aligned} \right\} \quad (2.18)$$

where $\overset{+}{\mathbf{V}}(X) := \mathbf{V}_{\overset{+}{\tau}(X)}(X)$, and $\bar{\mathbf{V}}(X) := \mathbf{V}_{\bar{\tau}(X)}(X)$. The coordinate-free forms of (2.18) read

$$T\overset{+}{\phi} = \overset{+}{\mathbf{F}} + \overset{+}{\mathbf{V}} \otimes d\overset{+}{\tau} \quad \text{and} \quad T\bar{\phi} = \bar{\mathbf{F}} + \bar{\mathbf{V}} \otimes d\bar{\tau}. \quad (2.19)$$

For $t \in [0, T]$, on each layer, one has $\overset{+}{\mathbf{F}}|_{T\overset{+}{\Omega}_t} = T\overset{+}{\phi}|_{T\overset{+}{\Omega}_t} = \mathbf{F}_t|_{T\overset{+}{\Omega}_t}$, and $\bar{\mathbf{F}}|_{T\bar{\Omega}_t} = T\bar{\phi}|_{T\bar{\Omega}_t} = \mathbf{F}_t|_{T\bar{\Omega}_t}$.

(c) The growth velocity and the material metric

The material metric of an accreting–ablating body at a given material point depends on the state of stress of the accreting particles, the growth velocity and the state of deformation of the body at the time of attachment of the new material point. One can define an *accretion tensor* via the frozen deformation gradient and a material growth velocity. Material metric is then defined to be the pull-back of the ambient space metric by the accretion tensor [21]. The time dependence of an accreting body can be modelled as a material motion in the material ambient space. It turns out that given a time of attachment map such material motions are not unique; instead one can define an equivalence class of material motions. Using any member of the equivalence class results in the same material metric. In the presence of ablation, one has two material motions. Again, these are not unique. For calculating the material metric, only the accretion material motion is needed as we are not concerned with the material metric of a particle after it has left the body. In the following, we briefly review the construction of the material metric.

In an accreting–ablating body, what is given is the rate at which material points are added to the body on the accretion boundary and the rate at which material points are removed from the ablation boundary. These two vector fields may be unknown fields in the presence of phase change, for example. In this paper, we assume that they are given. It should be emphasized that the material analogues of the accretion and ablation velocities are not defined uniquely.

Recall that we have assumed that for $t \in (0, T]$, $\overset{+}{\Omega}_t$ is diffeomorphic to $\overset{+}{\Omega}_0$ and $\bar{\Omega}_t$ is diffeomorphic to $\bar{\Omega}_0$. This guarantees the existence of 1-parameter families of diffeomorphisms $\overset{+}{\phi}: \overset{+}{\Omega}_0 \times [0, T] \rightarrow \mathcal{M}$, and $\bar{\phi}: \bar{\Omega}_0 \times [0, T] \rightarrow \mathcal{M}$, such that $\overset{+}{\phi}(\overset{+}{\Omega}_0, t) = \overset{+}{\Omega}_t$, and $\bar{\phi}(\bar{\Omega}_0, t) = \bar{\Omega}_t$, $\forall t \in [0, T]$. However, these diffeomorphisms are not unique. Let us fix two diffeomorphisms $\overset{+}{\phi}$ and $\bar{\phi}$. For $X \in \overset{+}{\mathcal{A}}_T$, there is a unique $\overset{+}{X}_0 \in \overset{+}{\Omega}_0$ such that $\overset{+}{\phi}(\overset{+}{X}_0, \overset{+}{\tau}(X)) = \overset{+}{\phi}_{\overset{+}{\tau}(X)}(\overset{+}{X}_0) = X$. Similarly, for $X \in \bar{\mathcal{A}}_T$ there is a unique $\bar{X}_0 \in \bar{\Omega}_0$ such that $\bar{\phi}(\bar{X}_0, \bar{\tau}(X)) = \bar{\phi}_{\bar{\tau}(X)}(\bar{X}_0) = X$.⁸ The maps $\overset{+}{\phi}$ and $\bar{\phi}$ define a pair of motions of layers in the material manifold, with which we associate the following velocities:

$$\overset{+}{\mathbf{U}}(\overset{+}{X}_0, t) = \frac{\partial}{\partial t} \overset{+}{\phi}(\overset{+}{X}_0, t) \quad \text{and} \quad \bar{\mathbf{U}}(\bar{X}_0, t) = \frac{\partial}{\partial t} \bar{\phi}(\bar{X}_0, t). \quad (2.20)$$

Differentiating the relations $\overset{+}{\tau}(\overset{+}{\phi}(\overset{+}{X}_0, t)) = t$, and $\bar{\tau}(\bar{\phi}(\bar{X}_0, t)) = t$ with respect to time, one obtains the following constraints:

$$\langle d\overset{+}{\tau}(X), \overset{+}{\mathbf{U}}(\overset{+}{X}_0, t) \rangle = 1 \quad \text{and} \quad \langle d\bar{\tau}(X), \bar{\mathbf{U}}(\bar{X}_0, t) \rangle = 1, \quad (2.21)$$

⁸We use the notation $\overset{+}{\phi}_t(X) = \overset{+}{\phi}(X, t)$.

where $\overset{+}{\Phi}(X_0, t) = X = \bar{\Phi}(X_0, t)$. It should be emphasized that for a given pair of time of attachment and time of detachment maps, material motion is not uniquely defined; there are infinitely many material motions corresponding to a given pair $(\overset{+}{\tau}, \bar{\tau})$. These equivalent material motions satisfy the constraint (2.21)₁ [22] and correspond to isometric material metrics.

One can define a material motion $(\overset{+}{\Phi}_t, \bar{\Phi}_t)$ using foliation charts $(\mathcal{E}^1, \mathcal{E}^2, \overset{+}{\tau})$ on $\overset{+}{\mathcal{A}}_T$, and $(\Theta^1, \Theta^2, \bar{\tau})$ on $\bar{\mathcal{A}}_T$, where $(\mathcal{E}^1, \mathcal{E}^2)$ and (Θ^1, Θ^2) are the in-layer coordinates on $\overset{+}{\Omega}_\tau$ and $\bar{\Omega}_{\bar{\tau}}$, respectively, while $\overset{+}{\tau}$ and $\bar{\tau}$ are globally defined on $\overset{+}{\mathcal{A}}_T$ and $\bar{\mathcal{A}}_T$, respectively. The material motion preserves the in-layer coordinates $(\mathcal{E}^1, \mathcal{E}^2)$ and (Θ^1, Θ^2) . This means that if $X_0 \in \overset{+}{\Omega}_0$ has coordinates $(\mathcal{E}^1, \mathcal{E}^2, 0)$, then $\overset{+}{\Phi}_t$ maps it to the point X_t with coordinates $(\mathcal{E}^1, \mathcal{E}^2, t)$. Similarly, if $X_0 \in \bar{\Omega}_0$ has coordinates (Θ^1, Θ^2) , then $\bar{\Phi}_t$ maps it to the point X_t with coordinates (Θ^1, Θ^2, t) . Trajectories of the material motion are the curves with constant layer coordinates, i.e. $\overset{+}{\tau}$ -lines and $\bar{\tau}$ -lines. The growth and ablation velocities corresponding to $\overset{+}{\Phi}_t$ and $\bar{\Phi}_t$, respectively, are defined as

$$\overset{+}{\mathbf{U}} = \left. \frac{\partial}{\partial \overset{+}{\tau}} \right|_{\mathcal{E}^1, \mathcal{E}^2} \quad \text{and} \quad \bar{\mathbf{U}} = \left. \frac{\partial}{\partial \bar{\tau}} \right|_{\Theta^1, \Theta^2}. \quad (2.22)$$

Notice that $\langle d\overset{+}{\tau}, (\partial/\partial \overset{+}{\tau}) \rangle = 1$, and $\langle d\bar{\tau}, (\partial/\partial \bar{\tau}) \rangle = 1$.

Let us next calculate the total velocities of $\overset{+}{\omega}_t$ and $\bar{\omega}_t$. The map $\overset{+}{\varphi} \circ \overset{+}{\Phi}: \overset{+}{\Omega}_0 \times [0, T] \rightarrow \mathcal{S}$ tracks the deformed accretion surface $\overset{+}{\omega}_t$, and $\bar{\varphi} \circ \bar{\Phi}: \bar{\Omega}_0 \times [0, T] \rightarrow \mathcal{S}$ tracks the deformed ablation surface $\bar{\omega}_t$. The total velocities are calculated as

$$\left. \begin{aligned} \overset{+}{\mathbf{W}}(X) &= \frac{d}{dt} \overset{+}{\varphi}(\overset{+}{\Phi}(X_0, t)) = [\overset{+}{\mathbf{F}}(X) + \overset{+}{\mathbf{V}}(X) \otimes d\overset{+}{\tau}(X)] \overset{+}{\mathbf{U}}(\overset{+}{X}_0, t) = \overset{+}{\mathbf{F}}(X) \overset{+}{\mathbf{U}}(\overset{+}{X}_0, t) + \overset{+}{\mathbf{V}}(X) \\ \text{and} \quad \bar{\mathbf{W}}(X) &= \frac{d}{dt} \bar{\varphi}(\bar{\Phi}(X_0, t)) = [\bar{\mathbf{F}}(X) + \bar{\mathbf{V}}(X) \otimes d\bar{\tau}(X)] \bar{\mathbf{U}}(\bar{X}_0, t) = \bar{\mathbf{F}}(X) \bar{\mathbf{U}}(\bar{X}_0, t) + \bar{\mathbf{V}}(X). \end{aligned} \right\} \quad (2.23)$$

The spatial velocities are defined as $\overset{+}{\mathbf{w}} \circ \varphi = \overset{+}{\mathbf{W}}$ and $\bar{\mathbf{w}} \circ \varphi = \bar{\mathbf{W}}$. Let $\overset{+}{\mathbf{u}}_t$ be a vector field describing the velocity at which material is being added onto $\overset{+}{\omega}_t$, i.e. $-\overset{+}{\mathbf{u}}_t$ is its relative velocity with respect to $\overset{+}{\omega}_t$ just before attachment, and let $-\bar{\mathbf{u}}_t$ be a vector field describing the velocity at which material is being removed from $\bar{\omega}_t$, i.e. $\bar{\mathbf{u}}_t$ is its relative velocity with respect to $\bar{\omega}_t$ just after detachment. If \mathbf{n}_t denotes the unit normal to $\varphi_t(\partial\mathcal{B}_t)$, then we must have $(-\overset{+}{\mathbf{u}}_t) \cdot \mathbf{n}_t < 0$ for accretion, i.e. $\overset{+}{\mathbf{u}}_t \cdot \mathbf{n}_t > 0$, as the material would be moving towards the body. Similarly, in the case of ablation we need $\bar{\mathbf{u}}_t \cdot \mathbf{n}_t > 0$ as the material removed would be moving away from the body.

For $X \in \mathcal{M}$, let us define the following time-independent tensor field

$$\mathbf{Q}(X) = \overset{+}{\mathbf{F}}(X) + \left[\overset{+}{\mathbf{u}}_{\overset{+}{\tau}(X)}(\overset{+}{\varphi}(X)) - \overset{+}{\mathbf{F}}(X) \overset{+}{\mathbf{U}}(\overset{+}{\Phi}_{\overset{+}{\tau}(X)}^{-1}(X), \overset{+}{\tau}(X)) \right] \otimes d\overset{+}{\tau}(X), \quad (2.24)$$

where $\overset{+}{\Phi}_{\overset{+}{\tau}(X)}^{-1}(X)$ can be understood as the pull back of $X \in \mathcal{M}$ to $\overset{+}{\Omega}_0$ along the trajectory induced by $\overset{+}{\Phi}$. \mathbf{Q} is called the *accretion tensor* [22]. Note that $\mathbf{Q}(\overset{+}{\Phi}(X_0, t)) \overset{+}{\mathbf{U}}(\overset{+}{X}_0, t) = \overset{+}{\mathbf{u}}((\overset{+}{\varphi} \circ \overset{+}{\Phi})(X_0, t), t)$, $\forall X_0 \in \overset{+}{\Omega}_0$. Let \mathbf{g} be the metric of the Euclidean ambient space \mathcal{S} . Assuming that the new material points are stress-free at their time of attachment the material metric on $\overset{+}{\mathcal{A}}_T$ is defined to be the pull-back of \mathbf{g} using \mathbf{Q} , i.e.,⁹

$$\mathbf{G}(X) = \mathbf{Q}^*(X) \mathbf{g}(\overset{+}{\varphi}(X)) \mathbf{Q}(X), \quad (2.25)$$

⁹Generalizing the analysis to pre-stressed added material is straightforward [21].

or in components, $G_{IJ}(X) = Q_i^I(X) g_{ij}(\overset{+}{\varphi}(X)) Q_j^I(X)$. Therefore, the material metric is written as

$$\mathbf{G}(X) = \begin{cases} \mathbf{G}_0(X) & \text{for } X \in \mathcal{B}_0, \\ \mathbf{Q}^*(X) \mathbf{g}(\overset{+}{\varphi}(X)) \mathbf{Q}(X) & \text{for } X \in \overset{+}{\mathcal{A}}_T. \end{cases} \quad (2.26)$$

The natural distances in the accreting–ablating body are measured using the material metric \mathbf{G} . Note that, for the layers that are joining the body, the material metric depends on the state of deformation of the body at the time of attachment. However, we are not interested in the state of deformation and stress of those layers that have already left the body. The material metric of those points after leaving the body has no effect on the rest of the body and does not appear in our accretion–ablation theory.

Remark 2.1. The map $\overset{+}{\tau}$ partitions the accreted manifold $(\overset{+}{\mathcal{A}}_T, \mathbf{G})$ into a collection of submanifolds $\{(\overset{+}{\Omega}_\tau^+, \tilde{\mathbf{G}}_\tau^+): \tau \in [0, T]\}$. Similarly, $\bar{\tau}$ partitions the ablated manifold $(\bar{\mathcal{A}}_T, \mathbf{G})$ into another collection of submanifolds $\{(\bar{\Omega}_\tau^-, \tilde{\mathbf{G}}_\tau^-): \tau \in [0, T]\}$. Here, $\tilde{\mathbf{G}}_\tau^+$ and $\tilde{\mathbf{G}}_\tau^-$ are the first fundamental forms inherited from \mathbf{G} by $\overset{+}{\Omega}_\tau^+$ and $\bar{\Omega}_\tau^-$, respectively. Let $\overset{+}{\mathbf{N}}_\tau$ and $\bar{\mathbf{N}}_\tau$ be the unit normals to $\overset{+}{\Omega}_\tau^+$ and $\bar{\Omega}_\tau^-$, respectively, where orthonormality is with respect to the metric \mathbf{G} . Let $\overset{+}{\mathbf{n}}_\tau$ and $\bar{\mathbf{n}}_\tau$ be the unit normals to $\overset{+}{\omega}_\tau$ and $\bar{\omega}_\tau$, respectively (here orthonormality is with respect to the ambient metric \mathbf{g}). Let us decompose the accretion and ablation velocities as

$$\overset{+}{\mathbf{U}} = \overset{+}{\mathbf{U}}^{\parallel} + \overset{+}{\mathbf{N}} \overset{+}{\mathbf{N}}, \quad \text{and} \quad \bar{\mathbf{U}} = \bar{\mathbf{U}}^{\parallel} + \bar{\mathbf{U}} \bar{\mathbf{N}}, \quad (2.27)$$

in the material manifold and

$$\overset{+}{\mathbf{u}} = \overset{+}{\mathbf{u}}^{\parallel} + \overset{+}{\mathbf{n}} \overset{+}{\mathbf{n}}, \quad \text{and} \quad \bar{\mathbf{u}} = \bar{\mathbf{u}}^{\parallel} + \bar{\mathbf{u}} \bar{\mathbf{n}}, \quad (2.28)$$

in the deformed configuration, where we have $\overset{+}{u}^{\parallel}, \bar{u}^{\parallel} > 0$. Note that, if \mathbf{Y} is tangent to $\overset{+}{\Omega}$, then $\mathbf{Q}\mathbf{Y}$ is tangent to $\overset{+}{\omega}$. Notice that $\langle\langle \mathbf{Y}, \mathbf{Q}^{-1} \overset{+}{\mathbf{n}} \rangle\rangle_{\mathbf{G}} = \langle\langle \mathbf{Q}\mathbf{Y}, \overset{+}{\mathbf{n}} \rangle\rangle_{\mathbf{g}} = 0$, and $\langle\langle \mathbf{Q}^{-1} \overset{+}{\mathbf{n}}, \mathbf{Q}^{-1} \overset{+}{\mathbf{n}} \rangle\rangle_{\mathbf{G}} = \langle\langle \overset{+}{\mathbf{n}}, \overset{+}{\mathbf{n}} \rangle\rangle_{\mathbf{g}} = 1$.

Thus, it can be deduced that $\mathbf{Q} \overset{+}{\mathbf{U}}^{\parallel} = \overset{+}{\mathbf{u}}^{\parallel}$, $\mathbf{Q} \overset{+}{\mathbf{N}} = \overset{+}{\mathbf{n}}$, and hence $\overset{+}{\mathbf{U}} = \overset{+}{\mathbf{u}}^{\parallel} \circ \varphi$.

(d) Stress, strain and constitutive equations

(i) Strain

A few different but related measures of strain are usually used in nonlinear elasticity and anelasticity [47,50,61,62]. The right Cauchy–Green strain is defined as $\mathbf{C}^b = \varphi^* \mathbf{g} = \mathbf{F}^* \mathbf{g} \mathbf{F}$, which is the pull-back of the spatial metric to the reference configuration. Here, $\flat: T_x \mathcal{C} \rightarrow T_x^* \mathcal{C}$ is the flat operator that maps a vector to its corresponding co-vector (1-form): $\mathbf{w} = w^a (\partial/\partial x^a) \mapsto \mathbf{w}^b = g_{ab} w^a dx^b$. In components, $C_{AB} = F^a_A g_{ab} F^b_B$. The familiar definition of the right Cauchy–Green strain is $\mathbf{C} = \mathbf{F}^T \mathbf{F}: T_X \mathcal{B} \rightarrow \mathcal{B}$, which has components $C^A_B = G^{AM} C_{MB} = (G^{AM} F^a_M g_{ab}) F^b_B = (F^T)^A_b F^b_B$. The spatial analogue of the right Cauchy–Green strain is defined as $\mathbf{c}^b = \varphi_* \mathbf{G} = \mathbf{F}^{-*} \mathbf{G} \mathbf{F}^{-1}$. The left Cauchy–Green strain is defined as $\mathbf{B}^\sharp = \varphi^* \mathbf{g}^\sharp$, where $\sharp: T_x^* \mathcal{C} \rightarrow T_x \mathcal{C}$ is the sharp operator that maps a co-vector (1-form) to its corresponding vector: $\boldsymbol{\omega} = \omega_a dx^a \mapsto \boldsymbol{\omega}^\sharp = g^{ab} \omega_b (\partial/\partial x^a)$. The left Cauchy–Green strain has components $B^{AB} = F^{-A}_a F^{-B}_b g^{ab}$, where g^{ab} are components of the inverse spatial metric such that $g^{ac} g_{cb} = \delta^a_b$. The spatial analogue of \mathbf{B}^\sharp is defined as $\mathbf{b}^\sharp = \varphi_* \mathbf{G}^\sharp = \mathbf{F} \mathbf{G}^\sharp \mathbf{F}^*$, which has components $b^{ab} = F^a_A F^b_B G^{AB}$. The tensor $\mathbf{b}: T_x \mathcal{C} \rightarrow T_x \mathcal{C}$ is defined as $\mathbf{b} = \mathbf{b}^\sharp \mathbf{g}$. Similarly, $\mathbf{c} = \mathbf{g}^\sharp \mathbf{c}^b$. Notice that $\mathbf{c} \mathbf{b} = \mathbf{g}^\sharp \mathbf{c}^b \mathbf{b}^\sharp \mathbf{g} = \mathbf{g}^\sharp \mathbf{F}^{-*} \mathbf{G} \mathbf{F}^{-1} \mathbf{F} \mathbf{G}^\sharp \mathbf{F}^* \mathbf{g} = \mathbf{g}^\sharp \mathbf{F}^{-*} \mathbf{G} \mathbf{G}^\sharp \mathbf{F}^* \mathbf{g} = \mathbf{g}^\sharp \mathbf{F}^{-*} \mathbf{F}^* \mathbf{g} = \mathbf{g}^\sharp \mathbf{g} = \text{id}_{\mathcal{S}}$, and hence $\mathbf{b} = \mathbf{c}^{-1}$. Similarly, $\mathbf{B} = \mathbf{C}^{-1}$.

(ii) Stress

For a hyper-elastic solid there exists an energy function $W = W(X, \mathbf{F}, \mathbf{G}, \mathbf{g})$. Material-frame-indifference (objectivity) implies that $W = \hat{W}(X, \mathbf{C}^b, \mathbf{G})$. The Cauchy $\boldsymbol{\sigma}$, the first Piola–Kirchhoff \mathbf{P} , and the second Piola–Kirchhoff \mathbf{S} stress tensors are related to the energy function as

$$\mathbf{P} = \mathbf{g}^\sharp \frac{\partial W}{\partial \mathbf{F}}, \quad \boldsymbol{\sigma} = \frac{2}{J} \frac{\partial W}{\partial \mathbf{g}} \quad \text{and} \quad \mathbf{S} = 2 \frac{\partial W}{\partial \mathbf{C}^b}. \quad (2.29)$$

They are also related as $\mathbf{S} = \mathbf{F}^{-1} \mathbf{P}$, and $\mathbf{P} = J \boldsymbol{\sigma} \mathbf{F}^{-*}$. Let us consider a surface element dA in the reference configuration with unit normal vector \mathbf{N} . This surface element is mapped to its deformed surface element da with unit normal \mathbf{n} . Traction \mathbf{t} is related to the Cauchy stress as $\mathbf{t} = \boldsymbol{\sigma} \cdot \mathbf{n} = \langle \boldsymbol{\sigma}, \mathbf{n} \rangle_{\mathbf{g}}$. In components, $t^a = \sigma^{ab} g_{bc} n^c$. The force acting on the deformed area element is $\mathbf{f} = \mathbf{t} da$. From the Piola identity $\mathbf{n}^b da = J \mathbf{F}^{-*} \mathbf{N}^b dA$, or in components, $n_a da = J F^{-A}{}_a N_A dA$ —Nanson’s formula. Thus, $\mathbf{f} = \mathbf{t}_0 dA = \mathbf{P} \cdot \mathbf{N} dA$.

(iii) Material symmetry

For an elastic body, the material symmetry group \mathcal{G}_X at $X \in \mathcal{B}$ with respect to the reference configuration $(\mathcal{B}, \mathbf{G})$ is defined as

$$W(X, \mathbf{K}^* \mathbf{F}, \mathbf{K}^* \mathbf{G}, \mathbf{g}) = W(X, \mathbf{F}, \mathbf{G}, \mathbf{g}) = W(X, \mathbf{F}, \mathbf{G}, \mathbf{g}), \quad \forall \mathbf{K} \in \mathcal{G}_X \leq \text{Orth}(\mathbf{G}), \quad (2.30)$$

for any deformation gradient \mathbf{F} , where $\mathbf{K}: T_X \mathcal{B} \rightarrow T_X \mathcal{B}$ is an invertible linear transformation, $\text{Orth}(\mathbf{G}) = \{\mathbf{Q}: T_X \mathcal{B} \rightarrow T_X \mathcal{B} \mid \mathbf{Q}^* \mathbf{G} \mathbf{Q} = \mathbf{G}\}$, and $\mathcal{G}_X \leq \text{Orth}(\mathbf{G})$ means that \mathcal{G}_X is a subgroup of $\text{Orth}(\mathbf{G})$. Equivalently,

$$\hat{W}(X, \mathbf{K}^* \mathbf{C}^b, \mathbf{K}^* \mathbf{G}) = \hat{W}(X, \mathbf{K}^* \mathbf{F}, \mathbf{K}^* \mathbf{G}) = \hat{W}(X, \mathbf{C}^b, \mathbf{G}), \quad \forall \mathbf{K} \in \mathcal{G}_X \leq \text{Orth}(\mathbf{G}). \quad (2.31)$$

In this paper, for the sake of simplicity, we restrict our calculations to isotropic solids. However, it should be emphasized that our accretion–ablation theory is not restricted to isotropic solids.

(iv) Isotropic solids

For an isotropic solid, the symmetry group is the orthogonal group, i.e. the energy function is invariant under rotations in the reference configuration. For an isotropic solid, W depends only on the principal invariants of \mathbf{C}^b , i.e. $W = \bar{W}(X, I_1, I_2, I_3)$, where

$$\left. \begin{aligned} I_1 &= \text{tr}_{\mathbf{G}} \mathbf{C} = C^A{}_A = C_{AB} G^{AB}, \\ I_2 &= \frac{1}{2}(I_1^2 - \text{tr}_{\mathbf{G}} \mathbf{C}^2) = \frac{1}{2}(I_1^2 - C^A{}_B C^B{}_A) = \frac{1}{2}(I_1^2 - C_{MB} C_{NA} G^{AM} G^{BN}), \\ \text{and} \quad I_3 &= \det \mathbf{C} = \frac{\det \mathbf{C}^b}{\det \mathbf{G}}. \end{aligned} \right\} \quad (2.32)$$

For an isotropic solid, the Cauchy stress has the following representation [63,64]:

$$\boldsymbol{\sigma} = \frac{2}{\sqrt{I_3}} [(I_2 \bar{W}_2 + I_3 \bar{W}_3) \mathbf{g}^\sharp + \bar{W}_1 \mathbf{b}^\sharp - I_3 \bar{W}_2 \mathbf{c}^\sharp], \quad (2.33)$$

where $\bar{W}_i = \partial \bar{W} / \partial I_i$, $i = 1, 2, 3$. For an incompressible isotropic solid $I_3 = 1$, and hence

$$\boldsymbol{\sigma} = -p \mathbf{g}^\sharp + 2 \bar{W}_1 \mathbf{b}^\sharp - 2 \bar{W}_2 \mathbf{c}^\sharp, \quad (2.34)$$

where p is the Lagrange multiplier associated with the incompressibility constraint $J = \sqrt{I_3} = 1$.

(e) The balance laws

(i) Balance of mass

Let $\rho_0(X)$ be the mass density field in the material configuration \mathcal{M} and $\rho(X, t)$ be the mass density field in the deformed configuration $\varphi_t(\mathcal{B}_t)$. For a body undergoing accretion and ablation, mass

is not conserved globally. However, local mass conservation still holds for $X \in \mathcal{B}_t$, away from $\bar{\Omega}_t^+$ and $\bar{\Omega}_t^-$, i.e.,

$$\rho_0(X) = \rho(\varphi(X, t)) J(X, t). \quad (2.35)$$

The total mass of the body at time t is given by

$$m(t) = \int_{\varphi_t(\mathcal{B}_t)} \rho(x, t) \, dv = \int_{\mathcal{B}_t} \rho_0(X) \, dV. \quad (2.36)$$

In terms of the material foliations, one has

$$m(t) = \int_{\mathcal{B}_0} \rho_0 \, dV + \int_0^t \left(\int_{\bar{\Omega}_\tau^+} \rho_0 \, \overset{+}{U} \, dA \right) d\tau^+ - \int_0^t \left(\int_{\bar{\Omega}_\tau^-} \rho_0 \, \bar{U} \, dA \right) d\tau^-. \quad (2.37)$$

The rate of change of mass can be expressed as

$$\dot{m}(t) = \int_{\bar{\Omega}_t^+} \rho_0 \, \overset{+}{U} \, dA - \int_{\bar{\Omega}_t^-} \rho_0 \, \bar{U} \, dA = \int_{\bar{\omega}_t^+} \rho_0 \, \overset{+}{u} \, da - \int_{\bar{\omega}_t^-} \rho_0 \, \bar{u} \, da. \quad (2.38)$$

(ii) Balance of linear and angular momenta

The local form of the balance of linear momentum in terms of the Cauchy stress reads:

$$\operatorname{div}_{\mathbf{g}} \boldsymbol{\sigma} + \rho \mathbf{b} = \rho \mathbf{a}, \quad (2.39)$$

where $\operatorname{div}_{\mathbf{g}}$ is divergence with respect to the spatial metric. In components, $(\operatorname{div}_{\mathbf{g}} \boldsymbol{\sigma})^a = \sigma^{ab}{}_{|b} = (\partial \sigma^{ab} / \partial x^b) + \sigma^{ac} \gamma^b{}_{cb} + \sigma^{cb} \gamma^a{}_{cb}$, where $\gamma^a{}_{bc}$ is the Christoffel symbol of the Levi-Civita connection $\nabla^{\mathbf{g}}$. In a local coordinate chart $\{x^a\}$, $\nabla^{\mathbf{g}}_{\partial_b} \partial_c = \gamma^a{}_{bc} \partial_a$, where $\gamma^a{}_{bc} = (1/2)g^{ak}(g_{kb,c} + g_{kc,b} - g_{bc,k})$. \mathbf{b} is the body force, and \mathbf{a} is the spatial acceleration. The local form of the balance of angular momentum is the symmetry of the Cauchy stress, i.e. $\sigma^{ab} = \sigma^{ba}$.

The rate of change of linear momentum for the whole body is written as

$$\begin{aligned} \frac{d}{dt} \int_{\varphi_t(\mathcal{B}_t)} \rho \mathbf{v} \, dv &= \frac{d}{dt} \int_{\mathcal{B}_t} \rho_0 \mathbf{V} \, dV \\ &= \frac{d}{dt} \left[\int_{\mathcal{B}_0} \rho_0 \mathbf{V} \, dV + \int_0^t \left(\int_{\bar{\Omega}_\tau^+} \rho_0 \, \overset{+}{U} \, \mathbf{V} \, dA \right) d\tau^+ - \int_0^t \left(\int_{\bar{\Omega}_\tau^-} \rho_0 \, \bar{U} \, \mathbf{V} \, dA \right) d\tau^- \right] \\ &= \int_{\mathcal{A}_t^+} \rho_0 \mathbf{A} \, dV + \int_{\bar{\Omega}_t^+} \rho_0 \, \overset{+}{U} \, \mathbf{V} \, dA - \int_{\mathcal{A}_t^-} \rho_0 \mathbf{A} \, dV - \int_{\bar{\Omega}_t^-} \rho_0 \, \bar{U} \, \mathbf{V} \, dA \\ &= \int_{\mathcal{B}_t} \rho_0 \mathbf{A} \, dV + \int_{\bar{\Omega}_t^+} \rho_0 \, \overset{+}{U} \, \mathbf{V} \, dA - \int_{\bar{\Omega}_t^-} \rho_0 \, \bar{U} \, \mathbf{V} \, dA. \end{aligned} \quad (2.40)$$

Thus

$$\frac{d}{dt} \int_{\varphi_t(\mathcal{B}_t)} \rho \mathbf{v} \, dv = \int_{\varphi_t(\mathcal{B}_t)} \rho \mathbf{a} \, dv + \int_{\bar{\omega}_t^+} (\rho_0 \circ \varphi) \, \overset{+}{u} \, \mathbf{v} \, da - \int_{\bar{\omega}_t^-} (\rho_0 \circ \varphi) \, \bar{u} \, \mathbf{v} \, da. \quad (2.41)$$

Since $\operatorname{div}_{\mathbf{g}} \boldsymbol{\sigma} + \rho \mathbf{b} = \rho \mathbf{a}$, one writes

$$\frac{d}{dt} \int_{\varphi_t(\mathcal{B}_t)} \rho \mathbf{v} \, dv = \int_{\varphi_t(\mathcal{B}_t)} \rho \mathbf{b} \, dv + \int_{\partial \varphi_t(\mathcal{B}_t)} \mathbf{t} \, dv + \int_{\bar{\omega}_t^+} (\rho_0 \circ \varphi) \, \overset{+}{u} \, \mathbf{v} \, da - \int_{\bar{\omega}_t^-} (\rho_0 \circ \varphi) \, \bar{u} \, \mathbf{v} \, da, \quad (2.42)$$

where \mathbf{b} is the body force and \mathbf{t} is traction.

Let us decompose the traction vector as $\mathbf{t} = \mathbf{t}^e + \mathbf{t}^\pm$, where \mathbf{t}^e is due to external loads and constraints, \mathbf{t}^+ is the effect of new particles being added and \mathbf{t}^- is the effect of particles leaving the body. Since accretion and ablation cannot take place at the same point and at the same time,

the traction on $\bar{\omega}$ is $\mathbf{t}^e + \mathbf{t}^+$ and that on $\bar{\omega}$ is $\mathbf{t}^e + \mathbf{t}^-$. For a new particle that is being added to the body, the balance of linear momentum in the time interval $[t, t + \Delta t]$ implies that

$$[(\rho_0 \circ \varphi) \overset{+}{u} \overset{+}{n} da \wedge dt](\mathbf{v} - \overset{+}{\mathbf{u}}) + (-\mathbf{t}^+ da) \wedge dt = [(\rho_0 \circ \varphi) \overset{+}{u} \overset{+}{n} da \wedge dt] \mathbf{v}. \quad (2.43)$$

Similarly, for a particle that is leaving the body, the balance of linear momentum in the interval $[t, t + \Delta t]$ implies that

$$[(\rho_0 \circ \varphi) \bar{u} \bar{n} da \wedge dt] \mathbf{v} = [(\rho_0 \circ \varphi) \bar{u} \bar{n} da \wedge dt](\mathbf{v} + \bar{\mathbf{u}}) + (-\mathbf{t}^- da) \wedge dt. \quad (2.44)$$

The joining particles exert the force $\mathbf{t}^+ da = -(\rho_0 \circ \varphi) \overset{+}{u} \overset{+}{n} da$ on the body, while the leaving particles exert the force $\mathbf{t}^- da = (\rho_0 \circ \varphi) \bar{u} \bar{n} da$ on the body. Thus, the rate of change of the linear momentum of the body is written as

$$\begin{aligned} \frac{d}{dt} \int_{\varphi_t(\mathcal{B}_t)} \rho \mathbf{v} dv &= \int_{\varphi_t(\mathcal{B}_t)} \rho \mathbf{b} dv + \int_{\partial \varphi_t(\mathcal{B}_t)} \mathbf{t}^e dv + \int_{\omega_t^+} (\rho_0 \circ \varphi) \overset{+}{u} \overset{+}{n} [\mathbf{v} - \overset{+}{\mathbf{u}}] da \\ &\quad - \int_{\omega_t^-} (\rho_0 \circ \varphi) \bar{u} \bar{n} [\mathbf{v} - \bar{\mathbf{u}}] da. \end{aligned} \quad (2.45)$$

Notice that the traction due to accretion/ablation is $\mathbf{t}^\pm = \mp(\rho_0 \circ \varphi) \overset{\pm}{u} \overset{\pm}{n}$.

3. Analysis of an accreting–ablating hollow cylindrical bar under finite extension

In this section, we present a detailed analysis of a thick hollow cylinder that, while under a time-dependent finite extension, undergoes accretion on its outer cylinder boundary and ablation on its inner cylinder boundary.

(a) Kinematics

Let us consider a hollow circular cylindrical bar with initial length L , inner radius R_1 and outer radius $R_2 > R_1$. We assume a homogeneous isotropic and incompressible material with an energy function $W = W(I_1, I_2)$, and use the cylindrical coordinates (R, θ, Z) in the reference configuration, and cylindrical coordinates (r, θ, z) in the current configuration. The metric of the current configuration has the following representation:

$$\mathbf{g} = \begin{bmatrix} 1 & 0 & 0 \\ 0 & r^2 & 0 \\ 0 & 0 & 1 \end{bmatrix}. \quad (3.1)$$

Accretion is assumed to occur on the outer cylindrical boundary in the current configuration. The outer radius of the deformed body is denoted by $s_2(t)$ (figure 4). Ablation is assumed to occur on the inner cylindrical boundary of the current configuration that has the radius $s_1(t)$. Let us assign a time of attachment $\overset{+}{\tau}(R)$ and a time of detachment $\bar{\tau}(R)$ to each layer with the radial coordinate $R > R_1$ in the reference configuration. Notice that for $R_1 \leq R \leq R_2$, $\overset{+}{\tau}(R) = 0$. Hence, $\overset{+}{\tau}(R)$ is invertible for $R \geq R_2$, while $\bar{\tau}(R)$ is invertible for $R \geq R_1$. We assume that $\bar{\tau}$ and $\overset{+}{\tau}$ are diffeomorphisms with non-vanishing derivatives. Their inverses are denoted by $S_1 = \bar{\tau}^{-1}$, and

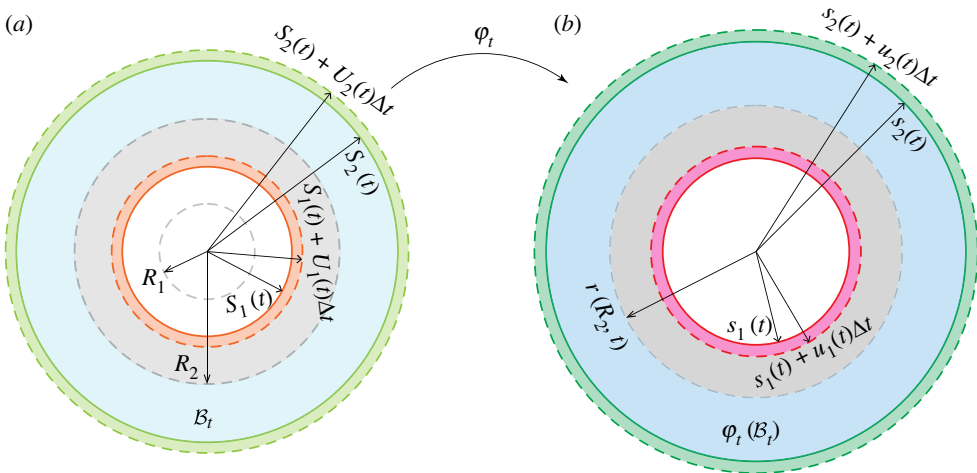


Figure 4. Cross sections of the reference and current configurations of an accreting–ablating thick hollow cylinder. (a) The material manifold (\mathcal{B}_t, G) at time t has inner radial coordinate $S_1(t)$ and outer radial coordinate $S_2(t)$. Accretion is occurring on the outer surface and ablation on the inner surface. At time $t + \Delta t$, the inner radial coordinate is $S_1(t) + U_1(t)\Delta t$ and the outer radial coordinate is $S_2(t) + U_2(t)\Delta t$. (b) The deformed bar at time t has inner radius $s_1(t)$ and outer radius $s_2(t)$. At time $t + \Delta t$, the inner radius is $s_1(t) + u_1(t)\Delta t$ and the outer radius is $s_2(t) + u_2(t)\Delta t$.

$S_2 = \tau^{-1}$, so that

$$s_1(t) = r(S_1(t), t) \quad \text{and} \quad s_2(t) = r(S_2(t), t). \quad (3.2)$$

We also assume that accretion and ablation take place continuously in the time interval $t \in [0, T]$. It is assumed that the accreting–ablating body has non-vanishing volume at all times, i.e. $S_1(t) < S_2(t)$, $\forall t \in (0, T]$. Let us consider a time-dependent finite extension of the bar such that it is slow enough for the inertial effects to be negligible and assume the following deformation mapping:

$$r = r(R, t), \quad \theta = \Theta, \quad z = \lambda^2(t)Z, \quad (3.3)$$

where $\lambda^2(t)$ is the axial stretch and is an unknown function to be determined.¹⁰ The deformation gradient reads

$$\mathbf{F} = \mathbf{F}(R, t) = \begin{bmatrix} r_{,R}(R, t) & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & \lambda^2(t) \end{bmatrix}. \quad (3.4)$$

(b) The material metric

Let us define the following functions:

$$\bar{r}(R) = r(R, \bar{\tau}(R)), \quad \bar{r}^+(R) = r(R, \bar{\tau}^+(R)), \quad \bar{\lambda}(R) = \lambda(\bar{\tau}(R)), \quad \bar{\lambda}^+(R) = \lambda(\bar{\tau}^+(R)). \quad (3.5)$$

We assume that the accreted cylindrical layer at any instant of time t is stress-free. In other words, stress-free cylindrical layers are continuously added to the outer cylindrical boundary of the bar.¹¹

¹⁰In a displacement-control loading $\lambda(t)$ is given.

¹¹It is straightforward to extend this analysis to pre-stressed accreting cylindrical layers [21].

This implies that the material metric at $R = S_2(t)$ is the pull-back of the metric of the (Euclidean) ambient space, i.e.

$$\mathbf{G}(S_2(t)) = \varphi_t^* \mathbf{g}(r(S_2(t), t)), \quad \text{or } \mathbf{G}(R) = \varphi_{\tau(R)}^* \mathbf{g}(r(R, \tau(R))). \quad (3.6)$$

In components, $G_{AB}(S_2(t)) = G_{AB}(R) = F^a_A(R, \tau(R)) F^b_B(R, \tau(R)) g_{ab}(r(R, \tau(R)))$. For this accretion-ablation problem, the material manifold (the natural configuration of the body) is an evolving Riemannian manifold $(\mathcal{B}_t, \mathbf{G})$ with

$$\mathcal{B}_t = \{(R, \Theta, Z) : 0 \leq \Theta < 2\pi, S_1(t) \leq R \leq S_2(t), 0 \leq Z \leq L\}. \quad (3.7)$$

The reference configuration is equipped with the following material metric:

$$\mathbf{G}(R) = \begin{cases} \begin{bmatrix} 1 & 0 & 0 \\ 0 & R^2 & 0 \\ 0 & 0 & 1 \end{bmatrix}, & S_1(t) \leq R < R_2, \\ \begin{bmatrix} [r_{,R}(R, \tau(R))]^2 & 0 & 0 \\ 0 & \tau^2(R) & 0 \\ 0 & 0 & \lambda^4(\tau(R)) \end{bmatrix}, & R_2 \leq R \leq S_2(t). \end{cases} \quad (3.8)$$

Observe that $t_{\text{ablation}} := \tau^-(R_2)$ is the time when the initial body is completely ablated.¹²

(c) The incompressibility constraint

The Jacobian is calculated as

$$J(R, t) = \sqrt{\frac{\det \mathbf{g}}{\det \mathbf{G}}} \det \mathbf{F} = \begin{cases} \frac{\lambda^2(t) r(R, t) r_{,R}(R, t)}{R}, & S_1(t) < R \leq R_2, \\ \frac{\lambda^2(t) r(R, t) r_{,R}(R, t)}{\lambda^+ \tau^+(R) r^+(R) r_{,R}(R, \tau^+(R))}, & R_2 \leq R < S_2(t). \end{cases} \quad (3.9)$$

When $t < t_{\text{ablation}}$, incompressibility in the region $S_1(t) \leq R \leq R_2$ gives us

$$r(R, t) r_{,R}(R, t) = \frac{R}{\lambda^2(t)}, \quad (3.10)$$

thus implying that

$$r^2(R, t) = s_1^2(t) + \frac{R^2 - S_1^2(t)}{\lambda^2(t)}. \quad (3.11)$$

Similarly, for the region $R_2 \leq R \leq S_2(t)$, incompressibility requires that

$$\lambda^2(t) r(R, t) r_{,R}(R, t) = \lambda^+(R) \tau^+(R) r_{,R}(R, \tau^+(R)), \quad (3.12)$$

which can be integrated to obtain

$$r^2(R, t) = r^2(R_2, t) + \frac{2}{\lambda^2(t)} \int_{R_2}^R \lambda^+(\xi) \tau^+(\xi) r_{,R}(\xi, \tau^+(\xi)) d\xi, \quad (3.13)$$

for $t < t_{\text{ablation}}$. Equivalently, one may integrate (3.12) from R to $S_2(t)$ to obtain:

$$r^2(R, t) = s_2^2(t) - \frac{2}{\lambda^2(t)} \int_R^{S_2(t)} \lambda^+(\xi) \tau^+(\xi) r_{,R}(\xi, \tau^+(\xi)) d\xi, \quad (3.14)$$

for $R \geq R_2$. Note that (3.14) holds for all $t > 0$.

¹²Note that $S_1(t) < R_2$ is equivalent to $t < t_{\text{ablation}}$.

(d) The accretion and ablation velocities

The accretion surfaces in the reference and the current configurations have the following representations:

$$\left. \begin{aligned} \bar{\Omega}_t^+ &= \{(S_1(t), \Theta, Z) : 0 \leq \Theta < 2\pi, 0 \leq Z \leq L\} \\ \text{and} \quad \bar{\omega}_t^+ &= \{(s_1(t), \Theta, \lambda^2(t)Z) : 0 \leq \Theta < 2\pi, 0 \leq Z \leq L\}. \end{aligned} \right\} \quad (3.15)$$

The ablation surfaces in the reference and the current configurations are represented as:

$$\left. \begin{aligned} \bar{\Omega}_t^- &= \{(S_2(t), \Theta, Z) : 0 \leq \Theta < 2\pi, 0 \leq Z \leq L\} \\ \text{and} \quad \bar{\omega}_t^- &= \{(s_2(t), \Theta, \lambda^2(t)Z) : 0 \leq \Theta < 2\pi, 0 \leq Z \leq L\}. \end{aligned} \right\} \quad (3.16)$$

Thus

$$\left. \begin{aligned} \dot{s}_1(t) &= r_{,R}(S_1(t), t) U_1(t) + V(S_1(t), t), \\ \text{and} \quad \dot{s}_2(t) &= r_{,R}(S_2(t), t) U_2(t) + V(S_2(t), t), \end{aligned} \right\} \quad (3.17)$$

where $U_1(t) = \dot{S}_1(t) > 0$, and $U_2(t) = \dot{S}_2(t) > 0$, i.e. both accretion and ablation surfaces are moving radially outward. Here, $V = \partial r / \partial t$ is the radial component of the material velocity on the accretion/ablation surface. We denote the ablation and accretion velocities by $u_1(t)$ and $u_2(t)$, respectively, which are defined as

$$u_1(t) = r_{,R}(S_1(t), t) U_1(t) \quad \text{and} \quad u_2(t) = r_{,R}(S_2(t), t) U_2(t). \quad (3.18)$$

The choices $U_1(t) = u_1(t)$, and $U_2(t) = u_2(t)$ impose the following constraints on $r(R, t)$:¹³

$$\left. \begin{aligned} r_{,R}(S_1(t), t) &= 1, \quad \text{or} \quad r_{,R}(R, \bar{\tau}(R)) = 1 \\ \text{and} \quad r_{,R}(S_2(t), t) &= 1, \quad \text{or} \quad r_{,R}(R, \bar{\tau}(R)) = 1. \end{aligned} \right\} \quad (3.19)$$

In particular, the choice (3.19)₁ makes the material metric $\mathbf{G}(R, t)$ and the Jacobian $J(R, t)$ continuous at $R = R_2$. Now, (3.19)₁ and (3.13) imply that for $t < t_{\text{ablation}}$

$$r^2(R, t) = r^2(R_2, t) + \frac{2}{\lambda^2(t)} \int_{R_2}^R \lambda^+ (\xi) \bar{r}^+ (\xi) d\xi. \quad (3.20)$$

Since $r(R, t)$ is continuous at $R = R_2$, (3.11) and (3.20) imply that

$$r^2(R, t) = s_1^2(t) + \frac{R_2^2 - S_1^2(t)}{\lambda^2(t)} + \frac{2}{\lambda^2(t)} \int_{R_2}^R \lambda^+ (\xi) \bar{r}^+ (\xi) d\xi, \quad (3.21)$$

for $R_2 \leq R \leq S_2(t)$ with $t < t_{\text{ablation}}$. Substituting $R = S_2(t)$ in (3.21), one obtains

$$s_1^2(t) = s_2^2(t) - \frac{R_2^2 - S_1^2(t)}{\lambda^2(t)} - \frac{2}{\lambda^2(t)} \int_{R_2}^{S_2(t)} \lambda^+ (\xi) \bar{r}^+ (\xi) d\xi. \quad (3.22)$$

Now, one may substitute (3.22) into (3.11) and combine with (3.14) to write the kinematics in terms of \bar{r}^+ and λ^+ . As $s_2(t) = r(S_2(t), t) = \bar{r}^+(S_2(t))$, when $t < t_{\text{ablation}}$:

$$r^2(R, t) = \begin{cases} \bar{r}^+(S_2(t)) - \frac{R_2^2 - R^2}{\lambda^2(t)} - \frac{2}{\lambda^2(t)} \int_{R_2}^{S_2(t)} \lambda^+ (\xi) \bar{r}^+ (\xi) d\xi, & R \leq R_2, \\ \bar{r}^+(S_2(t)) - \frac{2}{\lambda^2(t)} \int_R^{S_2(t)} \lambda^+ (\xi) \bar{r}^+ (\xi) d\xi, & R \geq R_2. \end{cases} \quad (3.23)$$

For $t \geq t_{\text{ablation}}$:

$$r^2(R, t) = \bar{r}^+(S_2(t)) - \frac{2}{\lambda^2(t)} \int_R^{S_2(t)} \lambda^+ (\xi) \bar{r}^+ (\xi) d\xi. \quad (3.24)$$

¹³Other choices will lead to isometric material manifolds, and hence identical stresses [21,26,59].

In a force-control problem, the functions $r(R, t)$ and $\lambda(t)$ are not known. However, it can be inferred from (3.23) to (3.24) that the knowledge of $\overset{\dagger}{r}(R)$ and $\lambda(t)$ is sufficient to calculate $r(R, t)$. Since $\overset{\dagger}{r}(R)$ is assumed to be given, $\overset{\dagger}{\lambda}(R) = \lambda(\overset{\dagger}{r}(R))$ is not an independent function. Thus, $\overset{\dagger}{r}(R)$ and $\lambda(t)$ are the only independent functions. Since $\lambda(t)$ is given in a displacement-control problem, $\overset{\dagger}{r}(R)$ is the only independent unknown function in displacement-control problems.

(e) Stress calculation

In this section, we compute the stresses for both $t < t_{\text{ablation}}$ and $t > t_{\text{ablation}}$. The stresses are calculated separately for the initial and the accreted parts of the body. The radial equilibrium equation reads $(\partial\sigma^{rr}/\partial r) + (1/r)\sigma^{rr} - r\sigma^{\theta\theta} = 0$.¹⁴ In terms of reference coordinates, $(1/r_{,R})(\partial\sigma^{rr}/\partial R) + (\sigma^{rr}/r) - r\sigma^{\theta\theta} = 0$. Thus, we have

$$\sigma_{,R}^{rr}(R, t) = [r^2(R, t)\sigma^{\theta\theta}(R, t) - \sigma^{rr}(R, t)] \frac{r_{,R}(R, t)}{r(R, t)}. \quad (3.25)$$

Recall that \mathbf{b}^\sharp has components $b^{ab} = F^a_A F^b_B G^{AB}$ and \mathbf{c}^\sharp has components $c^{ab} = g^{am} g^{bn} c_{mn}$, where $c_{ab} = F^{-A}_a F^{-B}_b G_{AB}$. For $S_1(t) \leq R \leq R_2$, and $t < t_{\text{ablation}}$:

$$\mathbf{b}^\sharp(R, t) = \begin{bmatrix} r_{,R}^2(R, t) & 0 & 0 \\ 0 & \frac{1}{R^2} & 0 \\ 0 & 0 & \lambda^4(t) \end{bmatrix}, \quad \mathbf{c}^\sharp(R, t) = \begin{bmatrix} \frac{1}{r_{,R}^2(R, t)} & 0 & 0 \\ 0 & \frac{R^2}{r^4(R, t)} & 0 \\ 0 & 0 & \frac{1}{\lambda^4(t)} \end{bmatrix}. \quad (3.26)$$

The principal invariants of \mathbf{b} read

$$\left. \begin{aligned} I_1(R, t) &= r_{,R}^2(R, t) + \frac{r^2(R, t)}{R^2} + \lambda^4(t) \\ \text{and} \quad I_2(R, t) &= r_{,R}^2(R, t)\lambda^4(t) + \frac{r_{,R}^2(R, t)r^2(R, t)}{R^2} + \frac{r^2(R, t)\lambda^4(t)}{R^2}. \end{aligned} \right\} \quad (3.27)$$

The Cauchy stress has the following non-zero components:¹⁵

$$\left. \begin{aligned} \sigma^{rr}(R, t) &= -p(R, t) + \alpha(R, t)r_{,R}^2(R, t) - \frac{\beta(R, t)}{r_{,R}^2(R, t)}, \\ \sigma^{\theta\theta}(R, t) &= -\frac{p(R, t)}{r^2(R, t)} + \frac{\alpha(R, t)}{R^2} - \frac{\beta(R, t)R^2}{r^4(R, t)} \\ \text{and} \quad \sigma^{zz}(R, t) &= -p(R, t) + \alpha(R, t)\lambda^4(t) - \frac{\beta(R, t)}{\lambda^4(t)}, \end{aligned} \right\} \quad (3.28)$$

where $\alpha = 2(\partial W/\partial I_1)$ and $\beta = 2(\partial W/\partial I_2)$. Using the incompressibility constraint (3.10) each of the components of $\boldsymbol{\sigma}(R, t)$ can be expressed solely in terms of the kinematic quantities $r(R, t)$ and $\lambda(t)$, i.e. one can eliminate $r_{,R}(R, t)$ in (3.28)₁ to obtain

$$\sigma^{rr}(R, t) = -p(R, t) + \frac{R^2\alpha(R, t)}{r^2(R, t)\lambda^4(t)} - \frac{\beta(R, t)r^2(R, t)\lambda^4(t)}{R^2}. \quad (3.29)$$

Substituting (3.29) and (3.28)₂ in (3.25), one obtains

$$\sigma_{,R}^{rr}(R, t) = \frac{r^4(R, t)\lambda^4(t) - R^4}{R r^4(R, t)\lambda^2(t)} \left[\frac{\alpha(R, t)}{\lambda^4(t)} + \beta(R, t) \right]. \quad (3.30)$$

¹⁴The other two equilibrium equations imply that $p = p(R, t)$.

¹⁵Notice that $\sigma^{\theta\theta}$ does not have the dimension of stress. Its physical component is $\hat{\sigma}^{\theta\theta} = r^2\sigma^{\theta\theta}$.

Since $\sigma^{rr}(S_1(t), t) = 0$, it is implied that

$$\sigma^{rr}(R, t) = \int_{S_1(t)}^R \frac{r^4(\xi, t)\lambda^4(t) - \xi^4}{\xi r^4(\xi, t)\lambda^2(t)} \left[\frac{\alpha(\xi, t)}{\lambda^4(t)} + \beta(\xi, t) \right] d\xi, \quad (3.31)$$

for $S_1(t) \leq R \leq R_2$ and $t < t_{\text{ablation}}$.¹⁶ Thus, (3.29) gives the following expression for pressure:

$$p(R, t) = \frac{R^2\alpha(R, t)}{r^2(R, t)\lambda^4(t)} - \frac{\beta(R, t)r^2(R, t)\lambda^4(t)}{R^2} - \int_{S_1(t)}^R \frac{r^4(\xi, t)\lambda^4(t) - \xi^4}{\xi r^4(\xi, t)\lambda^2(t)} \left[\frac{\alpha(\xi, t)}{\lambda^4(t)} + \beta(\xi, t) \right] d\xi. \quad (3.33)$$

Substituting (3.33) into (3.28)₂₋₃, one obtains

$$\left. \begin{aligned} \hat{\sigma}^{\theta\theta}(R, t) &= \frac{r^4(R, t)\lambda^4(t) - R^4}{R^2 r^2(R, t)} \left[\frac{\alpha(R, t)}{\lambda^4(t)} + \beta(R, t) \right] \\ &+ \int_{S_1(t)}^R \frac{r^4(\xi, t)\lambda^4(t) - \xi^4}{\xi r^4(\xi, t)\lambda^2(t)} \left[\frac{\alpha(\xi, t)}{\lambda^4(t)} + \beta(\xi, t) \right] d\xi \\ \text{and } \sigma^{zz}(R, t) &= \alpha(R, t) \left[\lambda^4(t) - \frac{R^2}{r^2(R, t)\lambda^4(t)} \right] + \beta(R, t) \left[\frac{r^2(R, t)\lambda^4(t)}{R^2} - \frac{1}{\lambda^4(t)} \right] \\ &+ \int_{S_1(t)}^R \frac{r^4(\xi, t)\lambda^4(t) - \xi^4}{\xi r^4(\xi, t)\lambda^2(t)} \left[\frac{\alpha(\xi, t)}{\lambda^4(t)} + \beta(\xi, t) \right] d\xi. \end{aligned} \right\} \quad (3.34)$$

For $\{R_2 \leq R \leq S_2(t), t < t_{\text{ablation}}\}$ or $\{t \geq t_{\text{ablation}}, S_1(t) \leq R \leq S_2(t)\}$:

$$\left. \begin{aligned} \mathbf{b}^\sharp(R, t) &= \begin{bmatrix} \left[\frac{r_{,R}(R, t)}{r_{,R}(\frac{+}{r}(R))} \right]^2 & 0 & 0 \\ 0 & \frac{1}{r^{\frac{+2}{r}}(R)} & 0 \\ 0 & 0 & \frac{\lambda^4(t)}{\lambda^{\frac{+4}{\lambda}}(R)} \end{bmatrix}, \\ \mathbf{c}^\sharp(R, t) &= \begin{bmatrix} \left[\frac{r_{,R}(R, \frac{+}{r}(R))}{r_{,R}(R, t)} \right]^2 & 0 & 0 \\ 0 & \frac{r^{\frac{+2}{r}}(R)}{r^4(R, t)} & 0 \\ 0 & 0 & \frac{\lambda^{\frac{+4}{\lambda}}(R)}{\lambda^4(t)} \end{bmatrix}. \end{aligned} \right\} \quad (3.35)$$

The principal invariants of \mathbf{b} read

$$\left. \begin{aligned} I_1(R, t) &= r_{,R}^2(R, t) + \frac{r^2(R, t)}{r^{\frac{+2}{r}}(R)} + \frac{\lambda^4(t)}{\lambda^{\frac{+4}{\lambda}}(R)} \\ \text{and } I_2(R, t) &= \frac{r_{,R}^2(R, t)r^2(R, t)}{r^{\frac{+2}{r}}(R)} + \frac{r^2(R, t)\lambda^4(t)}{r^{\frac{+2}{r}}(R)\lambda^{\frac{+4}{\lambda}}(R)} + \frac{r_{,R}^2(R, t)\lambda^4(t)}{\lambda^{\frac{+4}{\lambda}}(R)}. \end{aligned} \right\} \quad (3.36)$$

¹⁶Alternatively, one may integrate (3.30) from R to R_2 to obtain

$$\sigma^{rr}(R, t) = \sigma^{rr}(R_2, t) - \int_R^{R_2} \frac{r^4(\xi, t)\lambda^4(t) - \xi^4}{\xi r^4(\xi, t)\lambda^2(t)} \left[\frac{\alpha(\xi, t)}{\lambda^4(t)} + \beta(\xi, t) \right] d\xi, \quad (3.32)$$

for $S_1(t) \leq R \leq R_2$, and $t < t_{\text{ablation}}$.

The non-zero components of the Cauchy stress are

$$\left. \begin{aligned} \sigma^{rr}(R, t) &= -p(R, t) + \alpha(R, t)r_{,R}^2(R, t) - \frac{\beta(R, t)}{r^2(R, t)}, \\ \sigma^{\theta\theta}(R, t) &= -\frac{p(R, t)}{r^2(R, t)} + \frac{\alpha(R, t)}{r^2(R)} - \frac{\beta(R, t)}{r^4(R)} \end{aligned} \right\} \quad (3.37)$$

and

$$\sigma^{zz}(R, t) = -p(R, t) + \frac{\alpha(R, t)\lambda^4(t)}{\lambda^4(R)} - \frac{\beta(R, t)}{\lambda^4(t)}.$$

Using the constraints (3.12) and (3.19), each of the components of $\sigma(R, t)$ can be expressed solely in terms of the kinematic quantities $r(R, t)$ and $\lambda(t)$, i.e. one can eliminate $r_{,R}(R, t)$ in (3.37)₁ to obtain

$$\sigma^{rr}(R, t) = -p(R, t) + \frac{\alpha(R, t)}{r^2(R)\lambda^4(t)} - \frac{\beta(R, t)r^2(R, t)\lambda^4(t)}{r^2(R)\lambda^4(t)}. \quad (3.38)$$

Substituting (3.37)₁₋₂ in (3.25), one obtains

$$\sigma_{,R}^{rr}(R, t) = \frac{\frac{\alpha(R, t)}{\lambda^4(t)} + \frac{\beta(R, t)}{\lambda^4(R)}}{r^4(R, t)\lambda^2(t)} \left[\alpha(R, t) + \frac{\beta(R, t)}{\lambda^4(R)} \right]. \quad (3.39)$$

Since $\sigma^{rr}(S_2(t), t) = 0$, it is implied that

$$\sigma^{rr}(R, t) = - \int_R^{S_2(t)} \frac{\frac{\alpha(\xi, t)}{\lambda^4(t)} + \frac{\beta(\xi, t)}{\lambda^4(\xi)}}{r^4(\xi, t)\lambda^2(t)} d\xi, \quad (3.40)$$

whenever $\{R_2 \leq R \leq S_2(t), t < t_{\text{ablation}}\}$, or $\{t \geq t_{\text{ablation}}, S_1(t) \leq R \leq S_2(t)\}$. Thus, (3.38) gives the following expression for the pressure field:

$$\begin{aligned} p(R, t) &= \frac{\alpha(R, t)}{r^2(R, t)\lambda^4(t)} - \frac{\beta(R, t)r^2(R, t)\lambda^4(t)}{r^2(R, t)\lambda^4(t)} \\ &+ \int_R^{S_2(t)} \frac{\frac{\alpha(\xi, t)}{\lambda^4(t)} + \frac{\beta(\xi, t)}{\lambda^4(\xi)}}{r^4(\xi, t)\lambda^2(t)} d\xi. \end{aligned} \quad (3.41)$$

Substituting (3.41) into (3.37)₂₋₃, one obtains

$$\left. \begin{aligned} \hat{\sigma}^{\theta\theta}(R, t) &= \frac{r^4(R, t)\lambda^4(t) - \frac{\beta(R, t)}{\lambda^4(R)}}{r^2(R, t)} \left[\frac{\alpha(R, t)}{\lambda^4(t)} + \frac{\beta(R, t)}{\lambda^4(R)} \right] \\ &- \int_R^{S_2(t)} \frac{\frac{\alpha(\xi, t)}{\lambda^4(t)} + \frac{\beta(\xi, t)}{\lambda^4(\xi)}}{r^4(\xi, t)\lambda^2(t)} d\xi \\ \text{and } \sigma^{zz}(R, t) &= \alpha(R, t) \left[\frac{\lambda^4(t)}{\lambda^4(R)} - \frac{\frac{\beta(R, t)}{\lambda^4(R)}}{\lambda^4(t)r^2(R, t)} \right] + \beta(R, t) \left[\frac{\lambda^4(t)r^2(R, t)}{\lambda^4(R)r^2(R)} - \frac{\frac{\beta(R, t)}{\lambda^4(R)}}{\lambda^4(t)} \right] \\ &- \int_R^{S_2(t)} \frac{\frac{\alpha(\xi, t)}{\lambda^4(t)} + \frac{\beta(\xi, t)}{\lambda^4(\xi)}}{r^4(\xi, t)\lambda^2(t)} d\xi, \end{aligned} \right\} \quad (3.42)$$

for $\{R_2 \leq R \leq S_2(t), t < t_{\text{ablation}}\}$, and $\{t \geq t_{\text{ablation}}, S_1(t) \leq R \leq S_2(t)\}$. Note that $\sigma^{\theta\theta}(S_2(t), t) = 0$, and $\sigma^{zz}(S_2(t), t) = 0$, i.e. $\sigma(S_2(t), t) = \mathbf{0}$. Since $\sigma^{rr}(R, t)$ has to be continuous in R at R_2 at any time $t < t_{\text{ablation}}$, we must have

$$\int_{S_1(t)}^{R_2} \frac{r^4(\xi, t)\lambda^4(t) - \xi^4}{\xi r^4(\xi, t)\lambda^2(t)} \left[\frac{\alpha(\xi, t)}{\lambda^4(t)} + \beta(\xi, t) \right] d\xi + \int_{R_2}^{S_2(t)} \frac{\lambda^{\frac{+2}{\lambda}}(\xi) [r^4(\xi, t)\lambda^4(t) - r^{\frac{+4}{r}}(\xi)\lambda^{\frac{+4}{\lambda}}(\xi)]}{r^4(\xi, t)\lambda^2(t) r^{\frac{+}{r}}(\xi)} \left[\frac{\alpha(\xi, t)}{\lambda^4(t)} + \frac{\beta(\xi, t)}{\lambda^{\frac{+4}{\lambda}}(\xi)} \right] d\xi = 0, \quad (3.43)$$

for all $0 < t < t_{\text{ablation}}$.¹⁷

Remark 3.1. Using (3.40), one obtains

$$\sigma^{rr}(R_2, t) = - \int_{R_2}^{S_2(t)} \frac{\lambda^{\frac{+2}{\lambda}}(\xi) [r^4(\xi, t)\lambda^4(t) - r^{\frac{+4}{r}}(\xi)\lambda^{\frac{+4}{\lambda}}(\xi)]}{r^4(\xi, t)\lambda^2(t) r^{\frac{+}{r}}(\xi)} \left[\frac{\alpha(\xi, t)}{\lambda^4(t)} + \frac{\beta(\xi, t)}{\lambda^{\frac{+4}{\lambda}}(\xi)} \right] d\xi, \quad (3.45)$$

which can be substituted into (3.32) to give

$$\sigma^{rr}(R, t) = - \int_R^{R_2} \frac{r^4(\xi, t)\lambda^4(t) - \xi^4}{\xi r^4(\xi, t)\lambda^2(t)} \left[\frac{\alpha(\xi, t)}{\lambda^4(t)} + \beta(\xi, t) \right] d\xi - \int_{R_2}^{S_2(t)} \frac{\lambda^{\frac{+2}{\lambda}}(\xi) [r^4(\xi, t)\lambda^4(t) - r^{\frac{+4}{r}}(\xi)\lambda^{\frac{+4}{\lambda}}(\xi)]}{r^4(\xi, t)\lambda^2(t) r^{\frac{+}{r}}(\xi)} \left[\frac{\alpha(\xi, t)}{\lambda^4(t)} + \frac{\beta(\xi, t)}{\lambda^{\frac{+4}{\lambda}}(\xi)} \right] d\xi, \quad (3.46)$$

where $S_1(t) \leq R \leq R_2$, and $t < t_{\text{ablation}}$.¹⁸ Thus, (3.29) gives the following expression for the pressure field:

$$p(R, t) = \frac{R^2\alpha(R, t)}{r^2(R, t)\lambda^4(t)} - \frac{\beta(R, t)r^2(R, t)\lambda^4(t)}{R^2} + \int_R^{R_2} \frac{r^4(\xi, t)\lambda^4(t) - \xi^4}{\xi r^4(\xi, t)\lambda^2(t)} \left[\frac{\alpha(\xi, t)}{\lambda^4(t)} + \beta(\xi, t) \right] d\xi + \int_{R_2}^{S_2(t)} \frac{\lambda^{\frac{+2}{\lambda}}(\xi) [r^4(\xi, t)\lambda^4(t) - r^{\frac{+4}{r}}(\xi)\lambda^{\frac{+4}{\lambda}}(\xi)]}{r^4(\xi, t)\lambda^2(t) r^{\frac{+}{r}}(\xi)} \left[\frac{\alpha(\xi, t)}{\lambda^4(t)} + \frac{\beta(\xi, t)}{\lambda^{\frac{+4}{\lambda}}(\xi)} \right] d\xi, \quad (3.47)$$

¹⁷For $t \geq t_{\text{ablation}}$, the boundary condition $\sigma^{rr}(S_1(t), t) = 0$ yields a similar constraint

$$\int_{S_1(t)}^{S_2(t)} \frac{\lambda^{\frac{+2}{\lambda}}(\xi) [r^4(\xi, t)\lambda^4(t) - r^{\frac{+4}{r}}(\xi)\lambda^{\frac{+4}{\lambda}}(\xi)]}{r^4(\xi, t)\lambda^2(t) r^{\frac{+}{r}}(\xi)} \left[\frac{\alpha(\xi, t)}{\lambda^4(t)} + \frac{\beta(\xi, t)}{\lambda^{\frac{+4}{\lambda}}(\xi)} \right] d\xi = 0, \quad (3.44)$$

in view of (3.40).

¹⁸Setting $\sigma^{rr}(S_1(t), t) = 0$ in (3.46) provides an alternative approach to recover (3.53).

where $S_1(t) \leq R \leq R_2$. Substituting (3.47) into (3.28)₂₋₃ one obtains

$$\left. \begin{aligned} \hat{\sigma}^{\theta\theta}(R, t) &= \frac{r^4(R, t)\lambda^4(t) - R^4}{R^2 r^2(R, t)} \left[\frac{\alpha(R, t)}{\lambda^4(t)} + \beta(R, t) \right] - \int_R^{R_2} \frac{r^4(\xi, t)\lambda^4(t) - \xi^4}{\xi r^4(\xi, t)\lambda^2(t)} \left[\frac{\alpha(\xi, t)}{\lambda^4(t)} + \beta(\xi, t) \right] d\xi \\ &\quad - \int_{R_2}^{S_2(t)} \frac{\lambda^{\frac{+2}{-}}(\xi) [r^4(\xi, t)\lambda^4(t) - r^{\frac{+4}{-}}(\xi) \lambda^{\frac{+4}{-}}(\xi)]}{r^4(\xi, t)\lambda^2(t) r^{\frac{+}{-}}(\xi)} \left[\frac{\alpha(\xi, t)}{\lambda^4(t)} + \frac{\beta(\xi, t)}{\lambda^{\frac{+4}{-}}(\xi)} \right] d\xi \\ \text{and } \sigma^{zz}(R, t) &= \alpha(R, t) \left[\lambda^4(t) - \frac{R^2}{r^2(R, t)\lambda^4(t)} \right] + \beta(R, t) \left[\frac{r^2(R, t)\lambda^4(t)}{R^2} - \frac{1}{\lambda^4(t)} \right] \\ &\quad - \int_R^{R_2} \frac{r^4(\xi, t)\lambda^4(t) - \xi^4}{\xi r^4(\xi, t)\lambda^2(t)} \left[\frac{\alpha(\xi, t)}{\lambda^4(t)} + \beta(\xi, t) \right] d\xi \\ &\quad - \int_{R_2}^{S_2(t)} \frac{\lambda^{\frac{+2}{-}}(\xi) [r^4(\xi, t)\lambda^4(t) - r^{\frac{+4}{-}}(\xi) \lambda^{\frac{+4}{-}}(\xi)]}{r^4(\xi, t)\lambda^2(t) r^{\frac{+}{-}}(\xi)} \left[\frac{\alpha(\xi, t)}{\lambda^4(t)} + \frac{\beta(\xi, t)}{\lambda^{\frac{+4}{-}}(\xi)} \right] d\xi, \end{aligned} \right\} \quad (3.48)$$

for $S_1(t) \leq R \leq R_2$.¹⁹ On the ablation boundary

$$\left. \begin{aligned} \hat{\sigma}^{\theta\theta}(S_1(t), t) &= \begin{cases} \left[\frac{s_1^2(t)\lambda^4(t)}{S_1^2(t)} - \frac{S_1^2(t)}{s_1^2(t)} \right] \left[\frac{\alpha(S_1(t), t)}{\lambda^4(t)} + \beta(S_1(t), t) \right], & t < t_{\text{ablation}}, \\ \left[\frac{s_1^2(t)\lambda^4(t)}{r^{\frac{+2}{-}}(S_1(t))} - \frac{r^{\frac{+4}{-}}(S_1(t)) \lambda^{\frac{+4}{-}}(S_1(t))}{s_1^2(t)} \right] \left[\frac{\alpha(S_1(t), t)}{\lambda^4(t)} + \frac{\beta(S_1(t), t)}{\lambda^{\frac{+4}{-}}(S_1(t))} \right], & t \geq t_{\text{ablation}}, \end{cases} \\ \text{and } \sigma^{zz}(S_1(t), t) &= \begin{cases} \left[\frac{s_1^2(t)\lambda^4(t)}{S_1^2(t)} - \frac{1}{\lambda^4(t)} \right] \left[\frac{\alpha(S_1(t), t)S_1^2(t)}{s_1^2(t)} + \beta(S_1(t), t) \right], & t < t_{\text{ablation}}, \\ \alpha(S_1(t), t) \left[\frac{\lambda^4(t)}{\lambda^{\frac{+4}{-}}(S_1(t))} - \frac{r^{\frac{+4}{-}}(S_1(t)) r^{\frac{+2}{-}}(S_1(t))}{\lambda^4(t)s_1^2(t)} \right] \\ \quad + \beta(S_1(t), t) \left[\frac{\lambda^4(t)s_1^2(t)}{\lambda^{\frac{+4}{-}}(S_1(t)) r^{\frac{+2}{-}}(S_1(t))} - \frac{r^{\frac{+4}{-}}(S_1(t))}{\lambda^4(t)} \right], & t \geq t_{\text{ablation}}. \end{cases} \end{aligned} \right\} \quad (3.49)$$

Notice that $\sigma^{\theta\theta}$ and σ^{zz} do not vanish on the ablation boundary.²⁰

Remark 3.2. In [26], it was shown that the finite extension of an accreting circular cylindrical bar made of an arbitrary incompressible isotropic solid is a universal deformation even in the presence of radially symmetric accretion. We have observed here that this result holds even when there is simultaneous radially symmetric accretion and ablation on the outer and inner boundaries, respectively.

(i) The applied axial force

The axial force at the two ends of the bar is given by

$$F(t) = 2\pi \int_{S_1(t)}^{S_2(t)} P^{zZ}(R, t) R dR, \quad (3.50)$$

¹⁹It is clear from (3.48) and (3.42) that $\sigma^{\theta\theta}$ and σ^{zz} are continuous at R_2 .

²⁰In a similar problem, Naghibzadeh *et al.* [57] observed non-zero $\sigma^{\theta\theta}$ and $\sigma^{\phi\phi}$ on the ablation boundary of a hollow spherical body undergoing accretion through its fixed inner boundary while ablation takes place on its traction-free outer boundary.

where $p^{zZ}(R, t) = \frac{\sigma^{zZ}(R, t)}{\lambda^2(t)}$ is the zZ -component of first Piola–Kirchhoff stress. For $S_1(t) \leq R \leq R_2$ and $t < t_{\text{ablation}}$:

$$\begin{aligned}
 p^{zZ}(R, t) = & \alpha(R, t) \left[\lambda^2(t) - \frac{R^2}{r^2(R, t)\lambda^6(t)} \right] + \beta(R, t) \left[\frac{r^2(R, t)\lambda^2(t)}{R^2} - \frac{1}{\lambda^6(t)} \right] \\
 & - \int_R^{R_2} \frac{r^4(\xi, t)\lambda^4(t) - \xi^4}{\xi r^4(\xi, t)\lambda^4(t)} \left[\frac{\alpha(\xi, t)}{\lambda^4(t)} + \beta(\xi, t) \right] d\xi \\
 & - \int_{R_2}^{S_2(t)} \frac{\lambda^{\frac{+2}{\lambda}}(\xi) [r^4(\xi, t)\lambda^4(t) - r^{\frac{+4}{r}}(\xi)\lambda^{\frac{+4}{\lambda}}(\xi)]}{r^4(\xi, t)\lambda^4(t) r^{\frac{+4}{r}}(\xi)} \left[\frac{\alpha(\xi, t)}{\lambda^4(t)} + \frac{\beta(\xi, t)}{\lambda^{\frac{+4}{\lambda}}(\xi)} \right] d\xi. \quad (3.51)
 \end{aligned}$$

For $\{R_2 \leq R \leq S_2(t), t < t_{\text{ablation}}\}$ and $\{t \geq t_{\text{ablation}}, S_1(t) \leq R \leq S_2(t)\}$:

$$\begin{aligned}
 p^{zZ}(R, t) = & \alpha(R, t) \left[\frac{\lambda^2(t)}{\lambda^{\frac{+4}{\lambda}}(R)} - \frac{\frac{+4}{\lambda}(R) r^{\frac{+2}{r}}(R)}{\lambda^6(t) r^2(R, t)} \right] + \beta(R, t) \left[\frac{\lambda^2(t) r^2(R, t)}{\lambda^{\frac{+4}{\lambda}}(R) r^{\frac{+2}{r}}(R)} - \frac{\frac{+4}{\lambda}(R)}{\lambda^6(t)} \right] \\
 & - \int_R^{S_2(t)} \frac{\lambda^{\frac{+2}{\lambda}}(\xi) [r^4(\xi, t)\lambda^4(t) - r^{\frac{+4}{r}}(\xi)\lambda^{\frac{+4}{\lambda}}(\xi)]}{r^4(\xi, t)\lambda^4(t) r^{\frac{+4}{r}}(\xi)} \left[\frac{\alpha(\xi, t)}{\lambda^4(t)} + \frac{\beta(\xi, t)}{\lambda^{\frac{+4}{\lambda}}(\xi)} \right] d\xi. \quad (3.52)
 \end{aligned}$$

Remark 3.3. Observe that (3.43) and (3.44) can be combined to define the following function²¹:

$$\gamma(t) := \begin{cases} \int_{S_1(t)}^{R_2} \frac{r^4(\xi, t)\lambda^4(t) - \xi^4}{\xi r^4(\xi, t)\lambda^2(t)} \left[\frac{\alpha(\xi, t)}{\lambda^4(t)} + \beta(\xi, t) \right] d\xi \\ \quad + \int_{R_2}^{S_2(t)} \frac{\lambda^{\frac{+2}{\lambda}}(\xi) [r^4(\xi, t)\lambda^4(t) - r^{\frac{+4}{r}}(\xi)\lambda^{\frac{+4}{\lambda}}(\xi)]}{r^4(\xi, t)\lambda^2(t) r^{\frac{+4}{r}}(\xi)} \left[\frac{\alpha(\xi, t)}{\lambda^4(t)} + \frac{\beta(\xi, t)}{\lambda^{\frac{+4}{\lambda}}(\xi)} \right] d\xi, & t \leq t_{\text{ablation}}, \\ \int_{S_1(t)}^{S_2(t)} \frac{\lambda^{\frac{+2}{\lambda}}(\xi) [r^4(\xi, t)\lambda^4(t) - r^{\frac{+4}{r}}(\xi)\lambda^{\frac{+4}{\lambda}}(\xi)]}{r^4(\xi, t)\lambda^2(t) r^{\frac{+4}{r}}(\xi)} \left[\frac{\alpha(\xi, t)}{\lambda^4(t)} + \frac{\beta(\xi, t)}{\lambda^{\frac{+4}{\lambda}}(\xi)} \right] d\xi, & t \geq t_{\text{ablation}}. \end{cases} \quad (3.53)$$

In a displacement-control problem, where $\lambda(t)$ is given, $\gamma(\bar{r}(R)) = 0$ is to be solved with $\bar{r}(R_2) = R_2$ to find the unknown function $\bar{r}(R)$ for $R > R_2$.

(f) The accretion–ablation initial-boundary-value problem for a neo-Hookean solid

Let $T \leq t_{\text{ablation}}$. Consider a homogeneous neo-Hookean material for which $\alpha(R, t) = \mu(R) = \mu_0 > 0$ and $\beta(R, t) = 0$. In order to simplify the calculations, assume that the spatial accretion/ablation velocities are constant, i.e. $u_1(t) = \bar{v} > 0$ and $u_2(t) = \bar{v} > 0$. The signs of \bar{v} and \bar{v} indicate that both accretion and ablation interfaces are moving radially outward. Thus,

$$\text{and } \left. \begin{aligned} S_1(t) = R_1 + \bar{v}t, \quad \text{or } \bar{r}(R) = \frac{R - R_1}{\bar{v}}, \\ S_2(t) = R_2 + \bar{v}t, \quad \text{or } \bar{r}(R) = \frac{R - R_2}{\bar{v}}. \end{aligned} \right\} \quad (3.54)$$

²¹ γ is continuous at t_{ablation} . Equivalently, $\gamma \circ \bar{r}$ is continuous at R_2 .

The non-zero physical components of the Cauchy stress for this problem are listed as follows:²²

$$\sigma^{rr}(R, t) = \begin{cases} \frac{\mu_0}{\lambda^2(t)} \int_{S_1(t)}^R \frac{d\xi}{\xi} - \frac{\mu_0}{\lambda^6(t)} \int_{S_1(t)}^R \frac{\xi^3 d\xi}{r^4(\xi, t)}, & R < R_2, \\ -\frac{\mu_0}{\lambda^2(t)} \int_R^{S_2(t)} \frac{\lambda^{\frac{+2}{r}}(\xi) d\xi}{\lambda^{\frac{+2}{r}}(\xi)} + \frac{\mu_0}{\lambda^6(t)} \int_R^{S_2(t)} \frac{\lambda^{\frac{+3}{r}}(\xi) \lambda^{\frac{+6}{r}}(\xi) d\xi}{r^4(\xi, t)}, & R \geq R_2, \end{cases}$$

$$\hat{\sigma}^{\theta\theta}(R, t) = \begin{cases} \mu_0 \left[\frac{r^2(R, t)}{R^2} - \frac{R^2}{\lambda^4(t) r^2(R, t)} \right] + \sigma^{rr}(R, t), & R < R_2, \\ \mu_0 \left[\frac{r^2(R, t)}{\lambda^{\frac{+2}{r}}(R)} - \frac{\lambda^{\frac{+4}{r}}(R) \lambda^{\frac{+2}{r}}(R)}{\lambda^4(t) r^2(R, t)} \right] + \sigma^{rr}(R, t), & R \geq R_2, \end{cases} \quad (3.56)$$

and

$$\sigma^{zz}(R, t) = \begin{cases} \mu_0 \left[\lambda^4(t) - \frac{R^2}{\lambda^4(t) r^2(R, t)} \right] + \sigma^{rr}(R, t), & R < R_2, \\ \mu_0 \left[\frac{\lambda^4(t)}{\lambda^{\frac{+4}{r}}(R)} - \frac{\lambda^{\frac{+4}{r}}(R) \lambda^{\frac{+2}{r}}(R)}{\lambda^4(t) r^2(R, t)} \right] + \sigma^{rr}(R, t), & R \geq R_2. \end{cases}$$

Traction continuity equation (3.53) simplifies to read

$$\lambda^4(t) \left[\int_{S_1(t)}^{R_2} \frac{d\xi}{\xi} + \int_{R_2}^{S_2(t)} \frac{\lambda^{\frac{+2}{r}}(\xi) d\xi}{\lambda^{\frac{+2}{r}}(\xi)} \right] = \int_{S_1(t)}^{R_2} \frac{\xi^3 d\xi}{r^4(\xi, t)} + \int_{R_2}^{S_2(t)} \frac{\lambda^{\frac{+3}{r}}(\xi) \lambda^{\frac{+6}{r}}(\xi) d\xi}{r^4(\xi, t)}. \quad (3.57)$$

Now, one can differentiate (3.57) with respect to t and use (3.11) and (3.21) to deduce that (the detailed calculations are given in appendix A)

$$\lambda^{\frac{+}{r}}(R) = \frac{R_2 + \int_{R_2}^R \lambda^{\frac{+}{r}}(\xi) d\xi}{\lambda^{\frac{+}{r}}(R)}, \quad (3.58)$$

and

$$r(R, t) = \begin{cases} \frac{R}{\lambda(t)}, & S_1(t) \leq R \leq R_2, \\ \frac{\lambda^{\frac{+}{r}}(R) \lambda^{\frac{+}{r}}(R)}{\lambda(t)}, & R_2 \leq R \leq S_2(t), \end{cases} \quad (3.59)$$

which when substituted into (3.56) implies that $\sigma^{rr}(R, t) = \sigma^{\theta\theta}(R, t) = 0$. Moreover,

$$p^{zZ}(R, t) = \begin{cases} \mu_0 \left[\lambda^2(t) - \frac{1}{\lambda^4(t)} \right], & S_1(t) \leq R \leq R_2, \\ \mu_0 \left[\frac{\lambda^2(t)}{\lambda^{\frac{+4}{r}}(R)} - \frac{\lambda^{\frac{+2}{r}}(R)}{\lambda^4(t)} \right], & R_2 \leq R \leq S_2(t), \end{cases} \quad (3.60)$$

using which the axial force can be expressed as

$$\frac{F(t)}{2\pi\mu_0} = \frac{R_2^2 - S_1^2(t)}{2} \left[\lambda^2(t) - \frac{1}{\lambda^4(t)} \right] + \lambda^2(t) \int_{R_2}^{S_2(t)} \frac{R dR}{\lambda^{\frac{+4}{r}}(R)} - \frac{1}{\lambda^4(t)} \int_{R_2}^{S_2(t)} R \lambda^{\frac{+2}{r}}(R) dR. \quad (3.61)$$

²²On the ablation boundary,

$$\hat{\sigma}^{\theta\theta}(S_1(t), t) = \mu_0 \left[\frac{s_1^2(t)}{S_1^2(t)} - \frac{S_1^2(t)}{\lambda^4(t) s_1^2(t)} \right] \quad \text{and} \quad \sigma^{zz}(S_1(t), t) = \mu_0 \left[\lambda^4(t) - \frac{S_1^2(t)}{\lambda^4(t) s_1^2(t)} \right]. \quad (3.55)$$

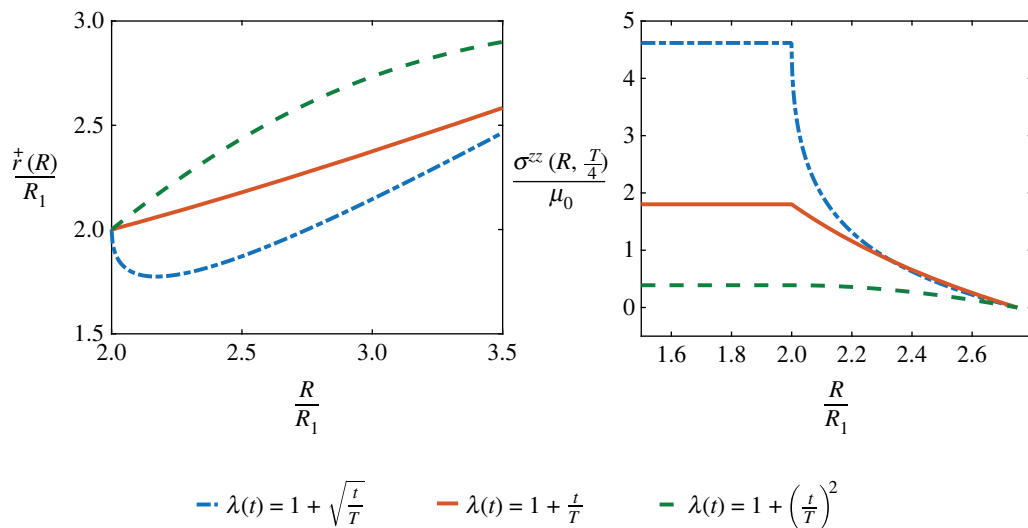


Figure 5. Solution to the displacement-control problem described in example 3.4 for $a=1$. For $\lambda(t)=1+(t/T)^n$ (an increasing function) the variation of the axial stress $\sigma^{zz}(R,t)$ with R at $t=T/4$ for the cases $n \in \{(1/2), 1, 2\}$ is shown.

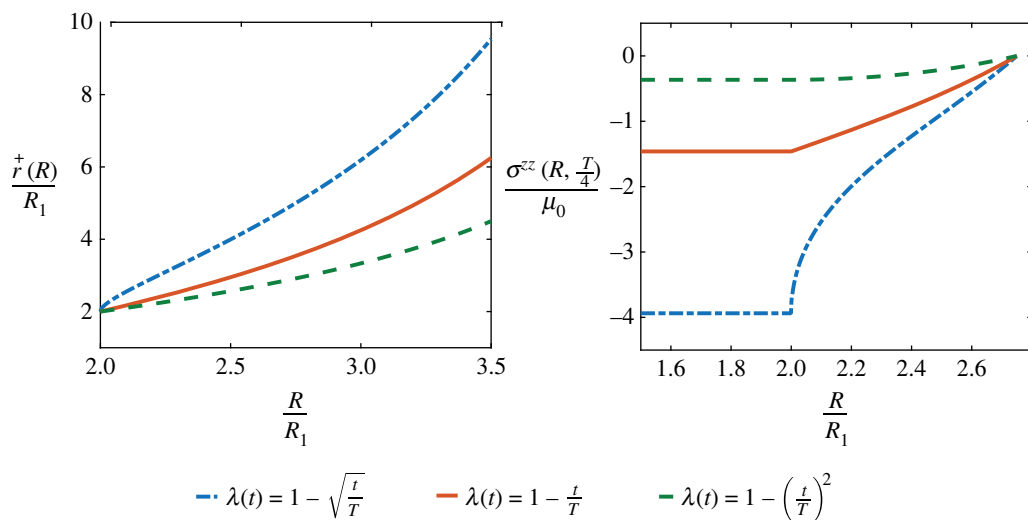


Figure 6. Solution to the displacement-control problem described in example 3.4 for $a=-1$. For $\lambda(t)=1-(t/T)^n$ (a decreasing function) the variation of the axial stress $\sigma^{zz}(R,t)$ with R at $t=T/4$ for the cases $n \in \{(1/2), 1, 2\}$ is shown.

In a force-control problem $F(t)$ is given (with $F(0)=0$), and $S_1(t)$, $S_2(t)$ are both known. All one needs to find is the unknown function $\lambda(t)$ that satisfies (3.61).

Example 3.4. Consider a displacement-control problem with $R_2=2R_1$, $\bar{v}=2(R_1/T)$, $\bar{v}^+=3(R_1/T)$, and $\lambda(t)=1+a(t/T)^n$, where $n \geq 0$, and $a \in \mathbb{R}$. Then $t_{\text{ablation}}=T/2$ and $S_2(t_{\text{ablation}})=3.5R_1$. We solve this problem for $a \in \{\pm 1\}$ and $n \in \{(1/2), 1, 2\}$ assuming the numerical values $R_1=1$ and $T=1$. At any given $t < t_{\text{ablation}}$, $\sigma^{zz}(R,t)$ is constant in the initial body ($R \leq R_2$), as we have assumed the material to be homogeneous and the deformation to be uniform (figures 5 and 6). As foreseen, $\sigma^{zz} \geq 0$ for $\lambda \geq 1$ (figure 5) and $\sigma^{zz} \leq 0$ for $\lambda \leq 1$ (figure 6). Further, σ^{zz} is non-zero

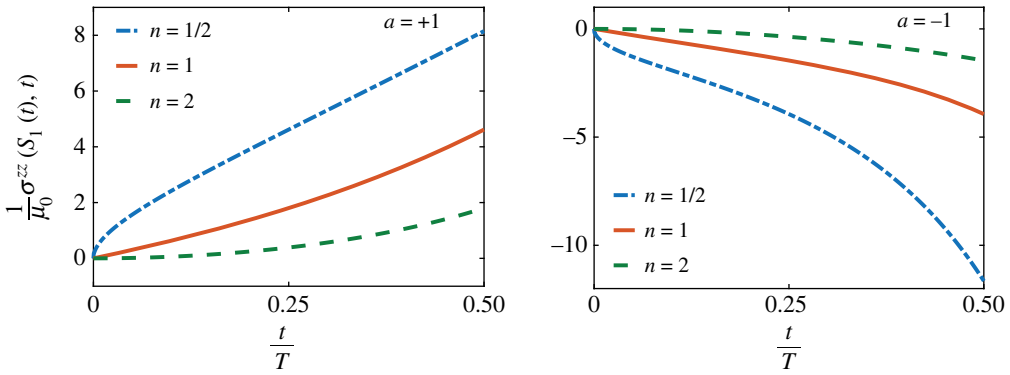


Figure 7. The axial stress on the ablation boundary for the displacement-control problem described in example 3.4. The variation of $\sigma^z(S_1(t), t)$ with $t (< t_{\text{ablation}})$ for $\lambda(t) = 1 + a(t/T)^n$, where $a \in \{\pm 1\}$ and $n \in \{1/2, 1, 2\}$ is shown.

on the ablation boundary (figure 7). Note that $\dot{\lambda}(t)$ taken in this example blows up near $t = 0$ for $n < 1$ and $a > 0$. This is why when the bar is subjected to the elongation $\lambda(t) = 1 + \sqrt{t/T}$, we first observe a reduction in the outer diameter $\overset{\dagger}{r}(R)$, or equivalently $s_2(t)$, see figure 5. Later, as the rate of elongation reduces, this effect is overshadowed by accretion and $\overset{\dagger}{r}(R)$ increases monotonically.

Example 3.5. Consider a force-control problem with $R_2 = 2R_1$, $\bar{v} = R_1/T$, $\overset{\dagger}{v} = 2(R_1/T)$. Then $t_{\text{ablation}} = T$ and $S_2(T) = 4R_1$. To find solutions of the form (3.59), first define $h(t) := \int_{R_2}^{S_2(t)} (R \, dR / \overset{\dagger}{\lambda}^4(R))$, and $k(t) := \int_{R_2}^{S_2(t)} R \overset{\dagger}{\lambda}^2(R) \, dR$, so that $\dot{h}(t) = (\overset{\dagger}{v} S_2(t) / \lambda^4(t))$ and $\dot{k}(t) = \overset{\dagger}{v} S_2(t) \lambda^2(t)$. Differentiating (3.61) with respect to t , one obtains

$$\left[2\lambda(t) \left[\frac{R_2^2 - S_1^2(t)}{2} + h(t) \right] + \frac{4}{\lambda^5(t)} \left[\frac{R_2^2 - S_1^2(t)}{2} + k(t) \right] \right] \dot{\lambda}(t) + \bar{v} S_1(t) \left[\frac{1}{\lambda^4(t)} - \lambda^2(t) \right] = \frac{\dot{F}(t)}{2\pi\mu_0}. \quad (3.62)$$

Thus, we need to solve the following system of nonlinear ODEs:

$$\left. \begin{aligned} \dot{\lambda}(t) &= \frac{f(t) + \bar{v} S_1(t) [\lambda^2(t) - (1/\lambda^4(t))]}{2\lambda(t) [(R_2^2 - S_1^2(t))/2] + h(t) + \frac{4}{\lambda^5(t)} \left[\frac{R_2^2 - S_1^2(t)}{2} + k(t) \right]}, \\ \dot{h}(t) &= \frac{\overset{\dagger}{v} S_2(t)}{\lambda^4(t)}, \\ \dot{k}(t) &= \overset{\dagger}{v} S_2(t) \lambda^2(t) \end{aligned} \right\} \quad (3.63)$$

and $\lambda(0) = 1, \quad h(0) = 0, \quad k(0) = 0,$

where $f(t) := \dot{F}(t)/2\pi\mu_0$. Assume the numerical values $R_1 = 1$ and $T = 1$. The time-dependent force $F(t)$ is taken as a polynomial function of t in figure 8, and an error function of t in figure 9, and a sinusoidal function of t in figure 10. The sign of σ^z is the same as that of F for monotonic loads

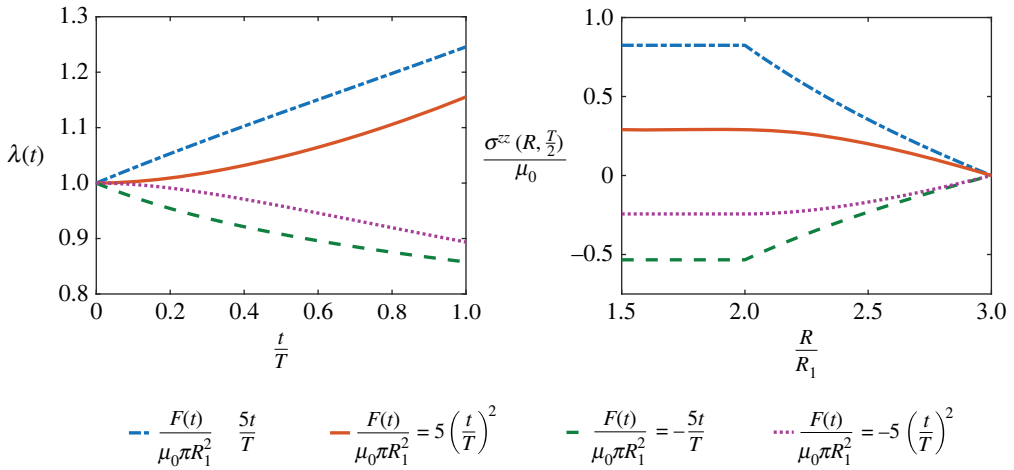


Figure 8. Solution to the force-control problem described in example 3.5 with $F(t) = \pm 5\mu_0\pi R_1^2(t/T)^n$, where $n \in \{1, 2\}$. The function $\lambda(t)$ reported here is the solution to the integral equation (3.61). The variation of the axial stress σ^{zz} with R at $t = T/2$ is shown.

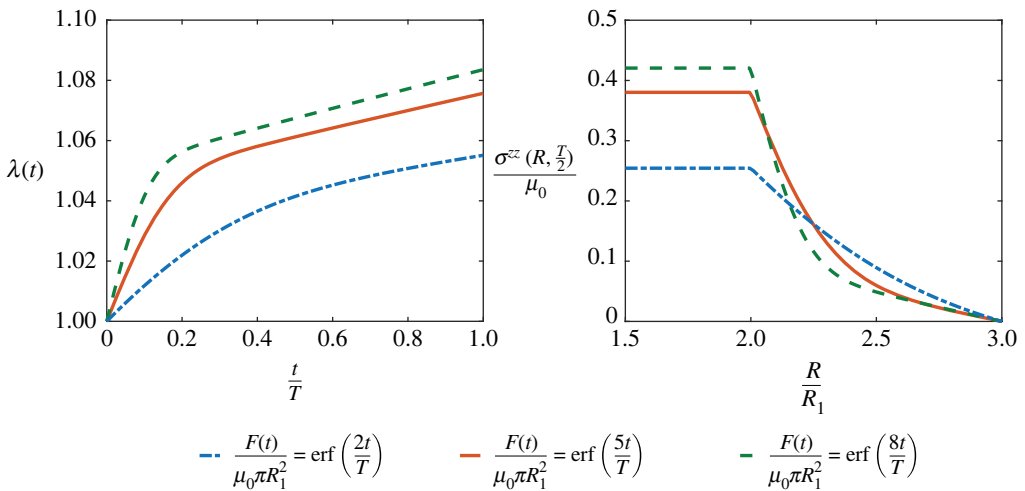


Figure 9. Solution to the force-control problem described in example 3.5 with $F(t) = \mu_0\pi R_1^2 \operatorname{erf}(At/T)$, where $A \in \{2, 5, 8\}$. The function $\lambda(t)$ reported here is the solution to the integral equation (3.61). The variation of the axial stress σ^{zz} with R at $t = T/2$ is shown.

(figure 8). In figure 9, as $F(t)$ increases from 0 until the asymptotic value $\mu_0\pi R_1^2$ is reached, $\dot{\lambda}(t)$ (and hence the axial strain rate) decreases until an asymptotic limit is reached. In figure 10, we look at three different time-dependent loads with $F(0) = F(T) = 0$, but all of them have different stretches at $t = T$ because their loading histories are different. Similarly, $F(t) = \mu_0\pi R_1^2 \sin(\pi t/T)$ and $F(t) = \mu_0\pi R_1^2 \sin^2(\pi t/T)$ have the same load at $t = T/2$, but different radial variation of σ^{zz} at that instant because of their different loading histories.

(g) Residual stress

We assume that the body is unloaded after the accretion and ablation processes end. Let $T < t_{\text{ablation}}$. For $t > T$, $\lambda(t) = 1$, and $F(t) = 0$. The material metric of the resulting body has the following

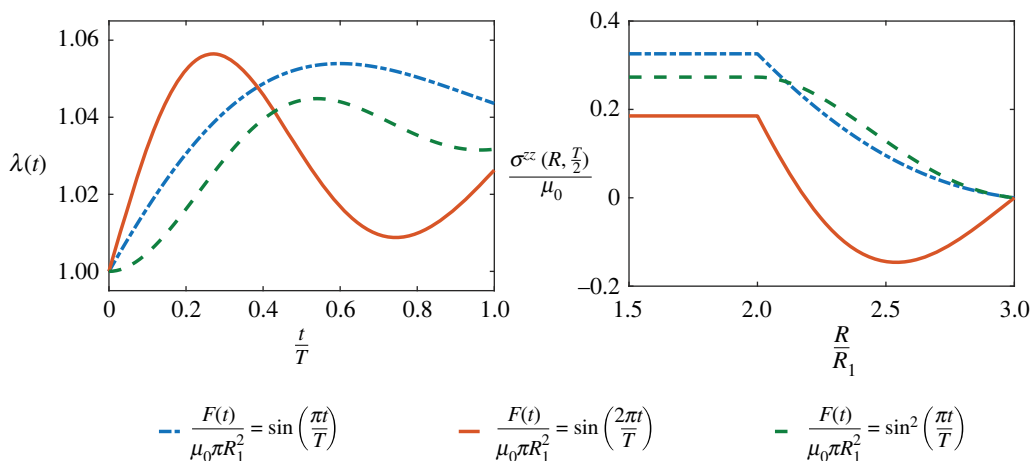


Figure 10. Solution to the force-control problem described in example 3.5. The function $\lambda(t)$ reported here is the solution to the integral equation (3.61) with $F(t) = \mu_0 \pi R_1^2 \sin^m(\omega t/T)$, where $m \in \{1, 2\}$ and $\omega \in \{\pi, 2\pi\}$. Further, the variation of the axial stress σ^z with R at $t = T/2$ is shown.

representation:²³

$$\mathbf{G} = \begin{cases} \begin{bmatrix} 1 & 0 & 0 \\ 0 & R^2 & 0 \\ 0 & 0 & 1 \end{bmatrix}, & S_1(T) \leq R < R_2, \\ \begin{bmatrix} 1 & 0 & 0 \\ 0 & \overset{+}{r}(R) & 0 \\ 0 & 0 & \overset{+}{\lambda}(R) \end{bmatrix}, & R_2 \leq R \leq S_2(T), \end{cases} \quad (3.64)$$

wherein the case $R < R_2$ is present only if $T < \bar{\tau}(R_2)$. Let $\tilde{\varphi}: \mathcal{B}_T \rightarrow \mathcal{S}$ map the material manifold to the residually stressed configuration. Let us consider the map $\tilde{\varphi}(R, \Theta, Z) = (\tilde{r}, \tilde{\theta}, \tilde{z})$ with $\tilde{r} = \tilde{r}(R)$, $\tilde{\theta} = \Theta$ and $\tilde{z} = \tilde{\lambda}^2 Z$. Incompressibility constraint can be expressed as

$$\text{and} \quad \left. \begin{aligned} \frac{\tilde{\lambda}^2 \tilde{r}(R) \tilde{r}'(R)}{R} &= 1, & R \leq R_2 \\ \frac{\tilde{\lambda}^2 \tilde{r}(R) \tilde{r}'(R)}{\overset{+}{\lambda}(R) \overset{+}{r}(R)} &= 1 & R_2 \leq R, \end{aligned} \right\} \quad (3.65)$$

which implies that

$$\tilde{r}^2(R) = \begin{cases} \tilde{r}^2(S_1(T)) + \frac{R^2 - S_1^2(T)}{\tilde{\lambda}^2} & R \leq R_2, \\ \tilde{r}^2(S_2(T)) - \frac{2}{\tilde{\lambda}^2} \int_R^{S_2(T)} \frac{\overset{+}{\lambda}(\xi) \overset{+}{r}(\xi) d\xi}{\tilde{\lambda}^2} & R_2 \leq R. \end{cases} \quad (3.66)$$

The continuity of $\tilde{r}(R)$ at R_2 requires that

$$\tilde{r}^2(S_2(T)) - \tilde{r}^2(S_1(T)) = \frac{1}{\tilde{\lambda}^2} \left[R_2^2 - S_1^2(T) + 2 \int_{R_2}^{S_2(T)} \frac{\overset{+}{\lambda}(\xi) \overset{+}{r}(\xi) d\xi}{\tilde{\lambda}^2} \right]. \quad (3.67)$$

²³The constraint (3.19)₁ has been used in calculating the metric of the accreted portion of the body.

Observe that the knowledge of either $\tilde{r}(S_1(T))$ or $\tilde{r}(S_2(T))$ is sufficient to calculate $\tilde{r}(R)$. Let us take $\tilde{r}(S_1(T))$ as the only independent variable (other than $\tilde{\lambda}$), in terms of which

$$\tilde{r}^2(R) = \begin{cases} \tilde{r}^2(S_1(T)) + \frac{R^2 - S_1^2(T)}{\tilde{\lambda}^2}, & R \leq R_2, \\ \tilde{r}^2(S_1(T)) + \frac{1}{\tilde{\lambda}^2} \left[R_2^2 - S_1^2(T) + 2 \int_{R_2}^R \frac{1}{\tilde{\lambda}} (\xi) \frac{1}{\tilde{r}} (\xi) d\xi \right], & R_2 \leq R. \end{cases} \quad (3.68)$$

The deformation gradient reads

$$\tilde{\mathbf{F}}(R) = \begin{bmatrix} \tilde{r}'(R) & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & \tilde{\lambda}^2 \end{bmatrix}. \quad (3.69)$$

For $R \leq R_2$:

$$\mathbf{b}^\sharp(R) = \begin{bmatrix} [\tilde{r}'(R)]^2 & 0 & 0 \\ 0 & \frac{1}{R^2} & 0 \\ 0 & 0 & \tilde{\lambda}^4 \end{bmatrix} \quad \text{and} \quad \mathbf{c}^\sharp(R) = \begin{bmatrix} \frac{1}{[\tilde{r}'(R)]^2} & 0 & 0 \\ 0 & \frac{R^2}{\tilde{r}^4(R)} & 0 \\ 0 & 0 & \frac{1}{\tilde{\lambda}^4} \end{bmatrix}. \quad (3.70)$$

The principal invariants of \mathbf{b} read

$$I_1(R) = [\tilde{r}'(R)]^2 + \frac{\tilde{r}^2(R)}{R^2} + \tilde{\lambda}^4 \quad \text{and} \quad I_2(R) = [\tilde{r}'(R)]^2 \tilde{\lambda}^4 + \frac{[\tilde{r}'(R)]^2 \tilde{r}^2(R)}{R^2} + \frac{\tilde{r}^2(R) \tilde{\lambda}^4}{R^2}. \quad (3.71)$$

Using (3.65)₁, the non-zero physical components of the residual Cauchy stress can be expressed as²⁴

$$\left. \begin{aligned} \tilde{\sigma}^{rr}(R) &= -p(R) + \frac{\alpha(R)R^2}{\tilde{\lambda}^4 \tilde{r}^2(R)} - \frac{\beta(R)\tilde{\lambda}^4 \tilde{r}^2(R)}{R^2}, \\ \hat{\tilde{\sigma}}^{\theta\theta}(R) &= -p(R) + \frac{\alpha(R)\tilde{r}^2(R)}{R^2} - \frac{\beta(R)R^2}{\tilde{r}^2(R)}, \\ \tilde{\sigma}^{zz}(R) &= -p(R) + \alpha(R)\tilde{\lambda}^4 - \frac{\beta(R)}{\tilde{\lambda}^4}. \end{aligned} \right\} \quad (3.72)$$

and

For $R < R_2$, the radial equilibrium equation and the traction boundary condition $\tilde{\sigma}^{rr}(S_1(T)) = 0$ imply that

$$\left. \begin{aligned} \tilde{\sigma}^{rr}(R) &= \int_{S_1(T)}^R \left[\frac{\alpha(\xi)}{\tilde{\lambda}^4} + \beta(\xi) \right] \left[\frac{\tilde{\lambda}^2}{\xi} - \frac{\xi^3}{\tilde{\lambda}^2 \tilde{r}^4(\xi)} \right] d\xi, \\ \hat{\tilde{\sigma}}^{\theta\theta}(R) &= \left[\frac{\alpha(R)}{\tilde{\lambda}^4} + \beta(R) \right] \left[\frac{\tilde{\lambda}^4 \tilde{r}^2(R)}{R^2} - \frac{R^2}{\tilde{r}^2(R)} \right] + \tilde{\sigma}^{rr}(R) \\ \tilde{\sigma}^{zz}(R) &= \alpha(R) \left[\tilde{\lambda}^4 - \frac{R^2}{\tilde{\lambda}^4 \tilde{r}^2(R)} \right] + \beta(R) \left[\frac{\tilde{\lambda}^4 \tilde{r}^2(R)}{R^2} - \frac{1}{\tilde{\lambda}^4} \right] + \tilde{\sigma}^{rr}(R). \end{aligned} \right\} \quad (3.73)$$

Now for $R \geq R_2$:

$$\mathbf{b}^\sharp(R) = \begin{bmatrix} [\tilde{r}'(R)]^2 & 0 & 0 \\ 0 & \frac{1}{\tilde{r}^2(R)} & 0 \\ 0 & 0 & \frac{\tilde{\lambda}^4}{\tilde{\lambda}^4(R)} \end{bmatrix} \quad \text{and} \quad \mathbf{c}^\sharp(R) = \begin{bmatrix} \frac{1}{[\tilde{r}'(R)]^2} & 0 & 0 \\ 0 & \frac{\tilde{r}^2(R)}{\tilde{r}^4(R)} & 0 \\ 0 & 0 & \frac{\tilde{\lambda}^4(R)}{\tilde{\lambda}^4} \end{bmatrix}. \quad (3.74)$$

²⁴Note that $\hat{\tilde{\sigma}}^{\theta\theta} = \tilde{r}^2 \tilde{\sigma}^{\theta\theta}$.

The principal invariants of \mathbf{b} read

$$I_1(R) = [\tilde{r}'(R)]^2 + \frac{\tilde{r}^2(R)}{\tilde{r}^2(R)} + \frac{\tilde{\lambda}^4}{\tilde{\lambda}^4(R)} \quad \text{and} \quad I_2(R) = \frac{[\tilde{r}'(R)]^2 \tilde{r}^2(R)}{\tilde{r}^2(R)} + \frac{\tilde{\lambda}^4 \tilde{r}^2(R)}{\tilde{r}^2(R) \tilde{\lambda}^4(R)} + \frac{\tilde{\lambda}^4 [\tilde{r}'(R)]^2}{\tilde{\lambda}^4(R)}. \quad (3.75)$$

Using (3.65)₂, the non-zero physical components of the residual Cauchy stress can be expressed as

$$\left. \begin{aligned} \tilde{\sigma}^{rr}(R) &= -p(R) + \alpha(R, t) \tilde{r}_{,R}^2(R) - \frac{\beta(R)}{\tilde{r}_{,R}^2(R)}, \\ \hat{\sigma}^{\theta\theta}(R) &= -p(R) + \frac{\alpha(R) \tilde{r}^2(R)}{\tilde{r}^2(R)} - \frac{\beta(R) \tilde{r}^2(R)}{\tilde{r}^2(R)}, \\ \tilde{\sigma}^{zz}(R) &= -p(R) + \frac{\alpha(R) \tilde{\lambda}^4}{\tilde{\lambda}^4(R)} - \frac{\beta(R) \tilde{\lambda}^4(R)}{\tilde{\lambda}^4(R)}. \end{aligned} \right\} \quad (3.76)$$

and

For $R \geq R_2$, the radial equilibrium equation and the traction boundary condition $\tilde{\sigma}^{rr}(S_2(T)) = 0$ give us

$$\left. \begin{aligned} \tilde{\sigma}^{rr}(R) &= - \int_R^{S_2(T)} \frac{1}{\tilde{\lambda}^2(\xi)} \left[\frac{\alpha(\xi)}{\tilde{\lambda}^4} + \frac{\beta(\xi)}{\tilde{\lambda}^4(\xi)} \right] \left[\frac{\tilde{\lambda}^2}{\tilde{r}(\xi)} - \frac{\xi^3}{\tilde{\lambda}^2 \tilde{r}^4(\xi)} \right] d\xi, \\ \hat{\sigma}^{\theta\theta}(R) &= \left[\frac{\alpha(R)}{\tilde{\lambda}^4} + \frac{\beta(R)}{\tilde{\lambda}^4(R)} \right] \left[\frac{\tilde{\lambda}^4 \tilde{r}^2(R)}{\tilde{r}^2(R)} - \frac{\tilde{r}^2(R) \tilde{\lambda}^4(R)}{\tilde{r}^2(R)} \right] + \tilde{\sigma}^{rr}(R), \\ \text{and } \tilde{\sigma}^{zz}(R) &= \alpha(R) \left[\frac{\tilde{\lambda}^4}{\tilde{\lambda}^4(R)} - \frac{\tilde{\lambda}^4(R) \tilde{r}^2(R)}{\tilde{\lambda}^4 \tilde{r}^2(R)} \right] + \beta(R) \left[\frac{\tilde{\lambda}^4 \tilde{r}^2(R)}{\tilde{\lambda}^4 \tilde{r}^2(R)} - \frac{\tilde{\lambda}^4(R)}{\tilde{\lambda}^4} \right] + \tilde{\sigma}^{rr}(R). \end{aligned} \right\} \quad (3.77)$$

The continuity of $\tilde{\sigma}^{rr}(R)$ at R_2 requires that²⁵

$$\begin{aligned} \tilde{Y} &:= \int_{S_1(T)}^{R_2} \left[\frac{\alpha(\xi)}{\tilde{\lambda}^4} + \beta(\xi) \right] \left[\frac{\tilde{\lambda}^2}{\xi} - \frac{\xi^3}{\tilde{\lambda}^2 \tilde{r}^4(\xi)} \right] d\xi \\ &+ \int_{R_2}^{S_2(T)} \frac{1}{\tilde{\lambda}^2(\xi)} \left[\frac{\alpha(\xi)}{\tilde{\lambda}^4} + \frac{\beta(\xi)}{\tilde{\lambda}^4(\xi)} \right] \left[\frac{\tilde{\lambda}^2}{\tilde{r}(\xi)} - \frac{\xi^3}{\tilde{\lambda}^2 \tilde{r}^4(\xi)} \right] d\xi = 0. \end{aligned} \quad (3.79)$$

The absence of an axial force in the residually stressed state implies that

$$\int_{S_1(T)}^{S_2(T)} 2\pi R \tilde{P}^{zZ}(R) dR = 0, \quad (3.80)$$

²⁵Alternatively, $\tilde{\sigma}^{rr}$ for $R \leq R_2$ can be expressed as:

$$\tilde{\sigma}^{rr}(R) = - \int_R^{R_2} \frac{\tilde{\lambda}^4 \tilde{r}^4(\xi) - \xi^4}{\tilde{\lambda}^2 \xi \tilde{r}^4(\xi)} \left[\frac{\alpha(\xi)}{\tilde{\lambda}^4} + \beta(\xi) \right] d\xi - \int_{R_2}^{S_2(T)} \frac{1}{\tilde{\lambda}^2 \tilde{r}^4(\xi) \tilde{r}(\xi)} \left[\frac{\alpha(\xi)}{\tilde{\lambda}^4} + \frac{\beta(\xi)}{\tilde{\lambda}^4(\xi)} \right] d\xi, \quad (3.78)$$

in which case the condition (3.79) is recovered from the traction boundary condition $\tilde{\sigma}^{rr}(S_1(T)) = 0$.

where $\tilde{p}^{zZ}(R) = \tilde{\sigma}^{zz}(R)/\tilde{\lambda}^2$ is the zZ -component of the residual Piola–Kirchhoff stress, calculated as

$$\tilde{p}^{zZ}(R) = \begin{cases} \alpha(R) \left[\tilde{\lambda}^2 - \frac{R^2}{\tilde{\lambda}^6 \tilde{r}^2(R)} \right] + \beta(R) \left[\frac{\tilde{\lambda}^2 \tilde{r}^2(R)}{R^2} - \frac{1}{\tilde{\lambda}^6} \right] + \frac{\tilde{\sigma}^{rr}(R)}{\tilde{\lambda}^2}, & R \leq R_2, \\ \alpha(R) \left[\frac{\tilde{\lambda}^2}{\tilde{\lambda}^4 (R)} - \frac{\tilde{\lambda}^4 (R) \tilde{r}^2 (R)}{\tilde{\lambda}^6 \tilde{r}^2 (R)} \right] + \beta(R) \left[\frac{\tilde{\lambda}^2 \tilde{r}^2 (R)}{\tilde{\lambda}^4 (R) \tilde{r}^2 (R)} - \frac{\tilde{\lambda}^4 (R)}{\tilde{\lambda}^6} \right] + \frac{\tilde{\sigma}^{rr}(R)}{\tilde{\lambda}^2}, & R_2 \leq R. \end{cases} \quad (3.81)$$

(i) Residual stress in the case of a neo-Hookean solid

Consider a homogeneous neo-Hookean material for which $\alpha(R) = \mu(R) = \mu_0 > 0$ and $\beta(R) = 0$ as in the previous section. The non-zero components of the residual Cauchy stress are written as

$$\tilde{\sigma}^{rr}(R) = \begin{cases} \frac{\mu_0}{\tilde{\lambda}^2} \int_{S_1(T)}^R \frac{d\xi}{\xi} - \frac{\mu_0}{\tilde{\lambda}^6} \int_{S_1(T)}^R \frac{\xi^3 d\xi}{\tilde{r}^4(\xi)}, & R < R_2, \\ -\frac{\mu_0}{\tilde{\lambda}^2} \int_R^{S_2(T)} \frac{\tilde{\lambda}^2(\xi) d\xi}{\tilde{r}(\xi)} + \frac{\mu_0}{\tilde{\lambda}^6} \int_R^{S_2(T)} \frac{\tilde{r}^3(\xi) \tilde{\lambda}^6(\xi) d\xi}{\tilde{r}^4(\xi)}, & R \geq R_2, \end{cases}$$

$$\hat{\sigma}^{\theta\theta}(R) = \begin{cases} \mu_0 \left[\frac{\tilde{r}^2(R)}{R^2} - \frac{R^2}{\tilde{\lambda}^4 \tilde{r}^2(R)} \right] + \tilde{\sigma}^{rr}(R), & R < R_2, \\ \mu_0 \left[\frac{\tilde{r}^2(R)}{\tilde{r}^2(R)} - \frac{\tilde{\lambda}^4 (R) \tilde{r}^2 (R)}{\tilde{\lambda}^4 \tilde{r}^2 (R)} \right] + \tilde{\sigma}^{rr}(R), & R \geq R_2, \end{cases} \quad (3.82)$$

and

$$\tilde{\sigma}^{zz}(R) = \begin{cases} \mu_0 \left[\tilde{\lambda}^4 - \frac{R^2}{\tilde{\lambda}^4 \tilde{r}^2(R)} \right] + \tilde{\sigma}^{rr}(R), & R < R_2, \\ \mu_0 \left[\frac{\tilde{\lambda}^4}{\tilde{\lambda}^4 (R)} - \frac{\tilde{\lambda}^4 (R) \tilde{r}^2 (R)}{\tilde{\lambda}^4 \tilde{r}^2 (R)} \right] + \tilde{\sigma}^{rr}(R), & R \geq R_2. \end{cases}$$

Continuity of $\tilde{\sigma}^{rr}$, i.e. (3.79) simplifies to read

$$\tilde{\lambda}^4 \left[\log \left(\frac{R_2}{S_1(T)} \right) + \int_{R_2}^{S_2(T)} \frac{\tilde{\lambda}^2(\xi) d\xi}{\tilde{r}(\xi)} \right] - \left[\int_{S_1(T)}^{R_2} \frac{\xi^3 d\xi}{\tilde{r}^4(\xi)} + \int_{R_2}^{S_2(T)} \frac{\tilde{r}^3(\xi) \tilde{\lambda}^6(\xi) d\xi}{\tilde{r}^4(\xi)} \right] = 0. \quad (3.83)$$

Further,

$$\tilde{p}^{zZ}(R) = \begin{cases} \mu_0 \left[\tilde{\lambda}^2 - \frac{R^2}{\tilde{\lambda}^6 \tilde{r}^2(R)} \right] + \frac{\tilde{\sigma}^{rr}(R)}{\tilde{\lambda}^2}, & R \leq R_2, \\ \mu_0 \left[\frac{\tilde{\lambda}^2}{\tilde{\lambda}^4 (R)} - \frac{\tilde{\lambda}^4 (R) \tilde{r}^2 (R)}{\tilde{\lambda}^6 \tilde{r}^2 (R)} \right] + \frac{\tilde{\sigma}^{rr}(R)}{\tilde{\lambda}^2}, & R_2 \leq R, \end{cases} \quad (3.84)$$

so that the zero axial force condition (3.80) implies that

$$\mu_0 \int_{S_1(T)}^{R_2} \left[\tilde{\lambda}^2 - \frac{R^2}{\tilde{\lambda}^6 \tilde{r}^2(R)} \right] R dR + \mu_0 \int_{R_2}^{S_2(T)} \left[\frac{\tilde{\lambda}^2}{\tilde{\lambda}^4 (R)} - \frac{\tilde{\lambda}^4 (R) \tilde{r}^2 (R)}{\tilde{\lambda}^6 \tilde{r}^2 (R)} \right] R dR + \frac{1}{\tilde{\lambda}^2} \int_{S_1(T)}^{S_2(T)} R \tilde{\sigma}^{rr}(R) dR = 0. \quad (3.85)$$

Note that

$$\begin{aligned} \int_{S_1(T)}^{S_2(T)} R \tilde{\sigma}^{rr}(R) dR &= \frac{\mu_0}{\tilde{\lambda}^2} \int_{S_1(T)}^{R_2} \left[\int_{S_1(T)}^R \frac{d\xi}{\xi} \right] R dR - \frac{\mu_0}{\tilde{\lambda}^6} \int_{S_1(T)}^{R_2} \left[\int_{S_1(T)}^R \frac{\xi^3 d\xi}{\tilde{r}^4(\xi)} \right] R dR \\ &\quad - \frac{\mu_0}{\tilde{\lambda}^2} \int_{R_2}^{S_2(T)} \left[\int_R^{S_2(T)} \frac{\lambda^{\dagger 2}(\xi) d\xi}{\tilde{r}^{\dagger}(\xi)} \right] R dR \\ &\quad + \frac{\mu_0}{\tilde{\lambda}^6} \int_{R_2}^{S_2(T)} \left[\int_R^{S_2(T)} \frac{\lambda^{\dagger 6}(\xi) d\xi}{\tilde{r}^4(\xi)} \right] R dR, \end{aligned} \quad (3.86)$$

or equivalently,

$$\begin{aligned} \int_{S_1(T)}^{S_2(T)} R \tilde{\sigma}^{rr}(R) dR &= \frac{\mu_0}{2\tilde{\lambda}^2} \left[R_2^2 \log \left(\frac{R_2}{S_2(T)} \right) - \frac{R_2^2 - S_1^2(T)}{2} \right] - \frac{\mu_0}{2\tilde{\lambda}^6} \int_{S_1(T)}^R \frac{[R_2^2 - \xi^2] \xi^3 d\xi}{\tilde{r}^4(\xi)} \\ &\quad - \frac{\mu_0}{2\tilde{\lambda}^2} \int_{R_2}^{S_2(T)} \frac{[\xi^2 - R_2^2] \lambda^{\dagger 2}(\xi) d\xi}{\tilde{r}^{\dagger}(\xi)} + \frac{\mu_0}{2\tilde{\lambda}^6} \int_{R_2}^{S_2(T)} \frac{[\xi^2 - R_2^2] \lambda^{\dagger 6}(\xi) d\xi}{\tilde{r}^4(\xi)}. \end{aligned} \quad (3.87)$$

This in view of (3.83) implies that

$$\begin{aligned} \int_{S_1(T)}^{S_2(T)} R \tilde{\sigma}^{rr}(R) dR &= -\frac{\mu_0[R_2^2 - S_1^2(T)]}{4\tilde{\lambda}^2} + \frac{\mu_0}{2\tilde{\lambda}^6} \int_{S_1(T)}^R \frac{\xi^5 d\xi}{\tilde{r}^4(\xi)} \\ &\quad - \frac{\mu_0}{2\tilde{\lambda}^2} \int_{R_2}^{S_2(T)} \frac{\xi^2 \lambda^{\dagger 2}(\xi) d\xi}{\tilde{r}^{\dagger}(\xi)} + \frac{\mu_0}{2\tilde{\lambda}^6} \int_{R_2}^{S_2(T)} \frac{\xi^2 \lambda^{\dagger 6}(\xi) d\xi}{\tilde{r}^4(\xi)}. \end{aligned} \quad (3.88)$$

Thus, (3.85) can be rewritten as

$$\begin{aligned} \tilde{\lambda}^2 \left[\frac{R_2^2 - S_1^2(T)}{2} + \int_{R_2}^{S_2(T)} \frac{R dR}{\lambda^{\dagger 4}(R)} \right] - \frac{1}{\tilde{\lambda}^6} \left[\int_{S_1(T)}^{R_2} \frac{R^3 dR}{\tilde{r}^2(R)} + \int_{R_2}^{S_2(T)} \frac{R \lambda^{\dagger 4}(R) \tilde{r}^{\dagger 2}(R) dR}{\tilde{r}^2(R)} \right] \\ - \frac{1}{2\tilde{\lambda}^4} \left[\frac{R_2^2 - S_1^2(T)}{2} + \int_{R_2}^{S_2(T)} \frac{\xi^2 \lambda^{\dagger 2}(\xi) d\xi}{\tilde{r}^{\dagger}(\xi)} \right] + \frac{1}{2\tilde{\lambda}^8} \left[\int_{S_1(T)}^{R_2} \frac{\xi^5 d\xi}{\tilde{r}^4(\xi)} + \int_{R_2}^{S_2(T)} \frac{\xi^2 \lambda^{\dagger 6}(\xi) \tilde{r}^{\dagger 3}(\xi) d\xi}{\tilde{r}^4(\xi)} \right] = 0. \end{aligned} \quad (3.89)$$

Determining the residual stretch and stress requires calculating the unknowns $\tilde{r}(S_1(T))$ and $\tilde{\lambda}$ that satisfy (3.83) and (3.89).

Remark 3.6. The functions $\lambda^{\dagger}(R)$ and $\tilde{r}^{\dagger}(R)$ are known from the deformation history of the bar prior to the removal of external loads, and hence, are treated as given quantities while solving for the residually stressed state. Observe that

$$\tilde{r}(R) = \begin{cases} \frac{R}{\tilde{\lambda}} & R \leq R_2, \\ \frac{\lambda^{\dagger}(R) \tilde{r}^{\dagger}(R)}{\tilde{\lambda}}, & R_2 \leq R \end{cases} \quad (3.90)$$

is a solution that satisfies (3.65), (3.83) and (3.89). The residual Cauchy stress components $\tilde{\sigma}^{rr}$ and $\tilde{\sigma}^{\theta\theta}$ vanish for this solution. Moreover,

$$\tilde{p}^{zZ}(R) = \begin{cases} \mu_0 \left[\tilde{\lambda}^2 - \frac{1}{\tilde{\lambda}^4} \right], & R \leq R_2, \\ \mu_0 \left[\frac{\tilde{\lambda}^2}{\tilde{\lambda}^4} - \frac{\tilde{\lambda}^2}{\tilde{\lambda}^4} \right], & R_2 \leq R, \end{cases} \quad (3.91)$$

so that the zero axial force condition (3.80) requires that

$$\int_{S_1(T)}^{R_2} \mu_0 R \left[\tilde{\lambda}^2 - \frac{1}{\tilde{\lambda}^4} \right] dR + \int_{R_2}^{S_2(T)} \mu_0 R \left[\frac{\tilde{\lambda}^2}{\tilde{\lambda}^4} - \frac{\tilde{\lambda}^2}{\tilde{\lambda}^4} \right] dR = 0. \quad (3.92)$$

This implies that

$$\tilde{\lambda}^6 = \frac{R_2^2 - S_1^2(T) + 2 \int_{R_2}^{S_2(T)} R \frac{\tilde{\lambda}^2}{\tilde{\lambda}^4} dR}{R_2^2 - S_1^2(T) + 2 \int_{R_2}^{S_2(T)} \frac{R dR}{\tilde{\lambda}^4}}. \quad (3.93)$$

Example 3.7. Consider a displacement-control problem with $R_2 = 2R_1$, $\bar{v} = R_1/2T$, $\bar{v}^+ = R_1/T$ and $\lambda(t) = 1 + a(t/T)^n$, where $n \geq 0$, and $a \in \mathbb{R}$. Then $t_{\text{ablation}} = 2T > T$, $S_1(T) = 1.5R_1$ and $S_2(T) = 3R_1$. First we need to find $\tilde{r}: [R_2, S_2(T)] \rightarrow \mathbb{R}$ as in example (3.4). With the knowledge of $\tilde{\lambda}$ and \tilde{r} (figure 11), we need to find $\tilde{r}(S_1(T))$ and $\tilde{\lambda}$ that satisfy the following nonlinear integral equations:

$$\left. \begin{aligned} & \tilde{\lambda}^2 \left[\frac{R_2^2 - S_1^2(T)}{2} + \int_{R_2}^{S_2(T)} \frac{R dR}{\tilde{\lambda}^4} \right] - \frac{1}{\tilde{\lambda}^6} \left[\int_{S_1(T)}^{R_2} \frac{R^3 dR}{\tilde{r}^2(R)} + \int_{R_2}^{S_2(T)} \frac{R \tilde{\lambda}^4}{\tilde{r}^2(R)} \right] \\ & - \frac{1}{2\tilde{\lambda}^4} \left[\frac{R_2^2 - S_1^2(T)}{2} + \int_{R_2}^{S_2(T)} \frac{\xi^2 \tilde{\lambda}^2}{\tilde{r}(\xi)} d\xi \right] \\ & + \frac{1}{2\tilde{\lambda}^8} \left[\int_{S_1(T)}^{R_2} \frac{\xi^5 d\xi}{\tilde{r}^4(\xi)} + \int_{R_2}^{S_2(T)} \frac{\xi^2 \tilde{r}^3}{\tilde{r}^4(\xi)} \frac{\tilde{\lambda}^6}{\tilde{\lambda}^4} d\xi \right] = 0 \\ \text{and } & \tilde{\lambda}^4 \left[\log \left(\frac{R_2}{S_1(T)} \right) + \int_{R_2}^{S_2(T)} \frac{\tilde{\lambda}^2}{\tilde{r}(\xi)} d\xi \right] - \left[\int_{S_1(T)}^{R_2} \frac{\xi^3 d\xi}{\tilde{r}^4(\xi)} + \int_{R_2}^{S_2(T)} \frac{\tilde{r}^3}{\tilde{r}^4(\xi)} \frac{\tilde{\lambda}^6}{\tilde{\lambda}^4} d\xi \right] = 0, \end{aligned} \right\} \quad (3.94)$$

where

$$\tilde{r}^2(R) = \begin{cases} \tilde{r}^2(S_1(T)) + \frac{R^2 - S_1^2(T)}{\tilde{\lambda}^2}, & R \leq R_2, \\ \tilde{r}^2(S_1(T)) + \frac{1}{\tilde{\lambda}^2} \left[R_2^2 - S_1^2(T) + 2 \int_{R_2}^R \frac{\tilde{\lambda}^2}{\tilde{\lambda}^4} (\xi) \tilde{r}(\xi) d\xi \right], & R_2 \leq R. \end{cases} \quad (3.95)$$

We solve this system numerically in Matlab for $a \in \{\pm 1/2\}$ and $n \in \{(1/2), 1, 2\}$ (with the numerical values $R_1 = 1$ and $T = 1$). Since the numerical values of $\tilde{\sigma}^{rr}(R)$ and $\tilde{\sigma}^{\theta\theta}(R)$ are negligible, they are not reported here. The values of $\tilde{\lambda}^2$ (table 1) and $\tilde{\sigma}^{zz}$ (figure 12) obtained numerically agree with those described in remark 3.6. From figure 12, we observe that even if a bar is subjected only to elongation, the residual axial stresses in the initial portion of the final body are compressive due to stress redistribution after the bar is set free. Similarly, tensile residual axial stress is observed in the initial portion of a bar shortened during accretion–ablation.

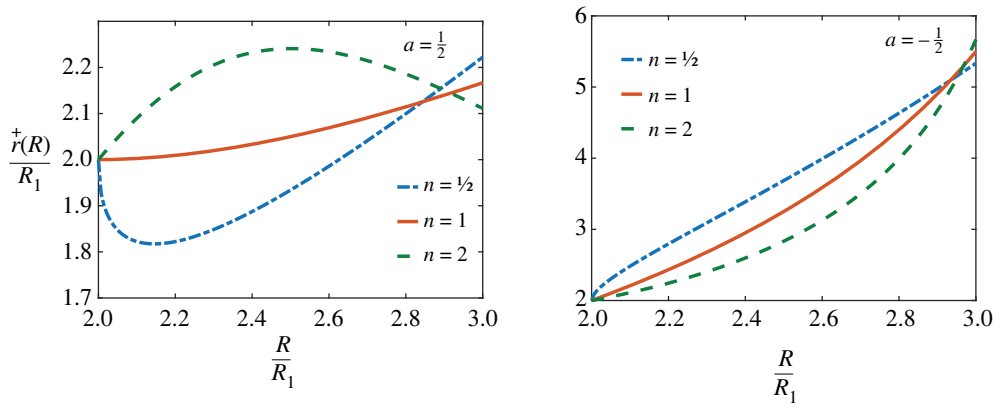


Figure 11. Solution of the displacement-control problem described in example 3.7 during the loading process.

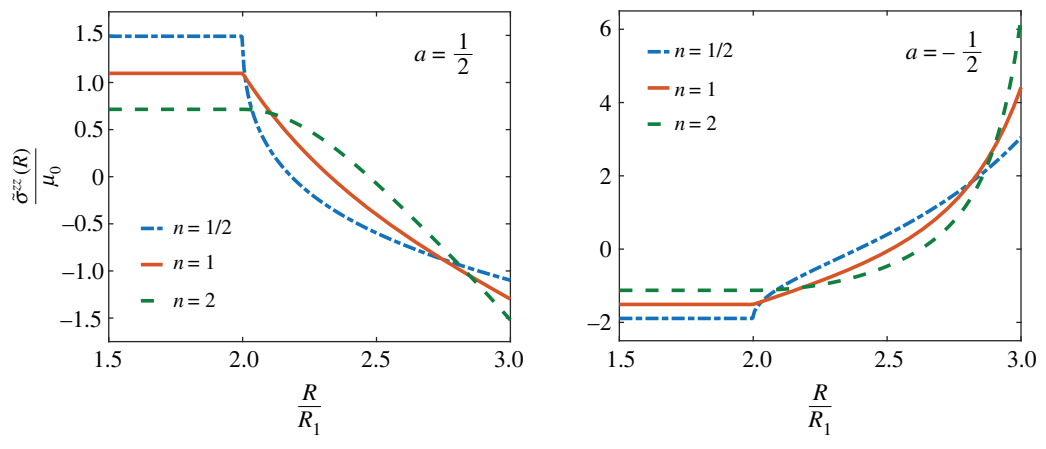


Figure 12. Residual stress $\tilde{\sigma}^{zz}(R)$ in the body (example 3.7) after the removal of the external forces for the displacement-control loading $\lambda(t) = 1 + a(t/T)^n$, where $a \in \{\pm 1/2\}$ and $n \in \{1/2, 1, 2\}$.

Table 1. Residual stretch $\tilde{\lambda}^2$ in the body when it is set free after the displacement-control loading described in example 3.7.

	$n = 1/2$	$n = 1$	$n = 2$
$a = 1/2$	1.4733	1.3547	1.2349
$a = -(1/2)$	0.4727	0.5514	0.6477

Example 3.8. Consider a force-control problem with $R_2 = 2R_1$, $\bar{v} = R_1/2T$, and $\bar{v}^+ = R_1/T$. Then $t_{\text{ablation}} = 2T > T$, $S_1(T) = 1.5R_1$ and $S_2(T) = 3R_1$. First we find the functions $\lambda(t)$ and $\bar{r}(R)$ as in example 3.5, which are then used to solve (3.94) and (3.95) for $\bar{r}(S_1(T))$ and $\tilde{\lambda}$. Assume the numerical values $R_1 = 1$ and $T = 1$. We report $\tilde{\sigma}^{zz}$ as a function of R in the residually stressed configuration taking $F(t)$ as polynomial (figure 13), error (figure 14) and sinusoidal (figure 15) functions of time t . The residual stretches $\tilde{\lambda}^2$ for the same choices of $F(t)$ are given in table 2. In figure 13, we compare the axial residual stress for loads varying monotonically as linear and quadratic functions of time. A monotonically increasing tensile $F(t)$ induces a compressive $\tilde{\sigma}^{zz}$ in the initial portion of the body, although $\tilde{\lambda}^2 > 1$. Similarly, a monotonically increasing compressive

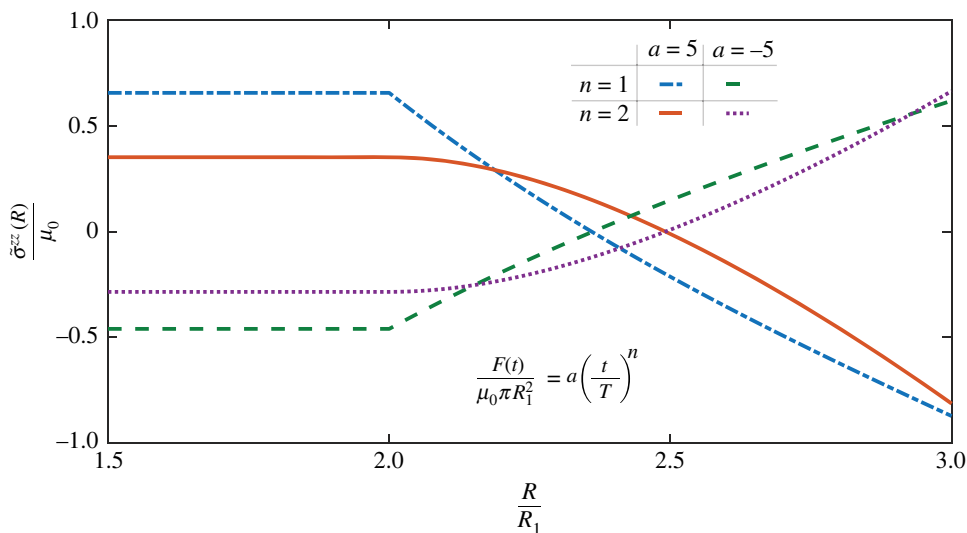


Figure 13. Residual stress $\tilde{\sigma}^{zz}(R)$ in the body (example 3.8) when it is set free after the loading $F(t) = \pm 5\mu_0\pi R_1^2(t/T)^n$, where $n \in \{1, 2\}$.

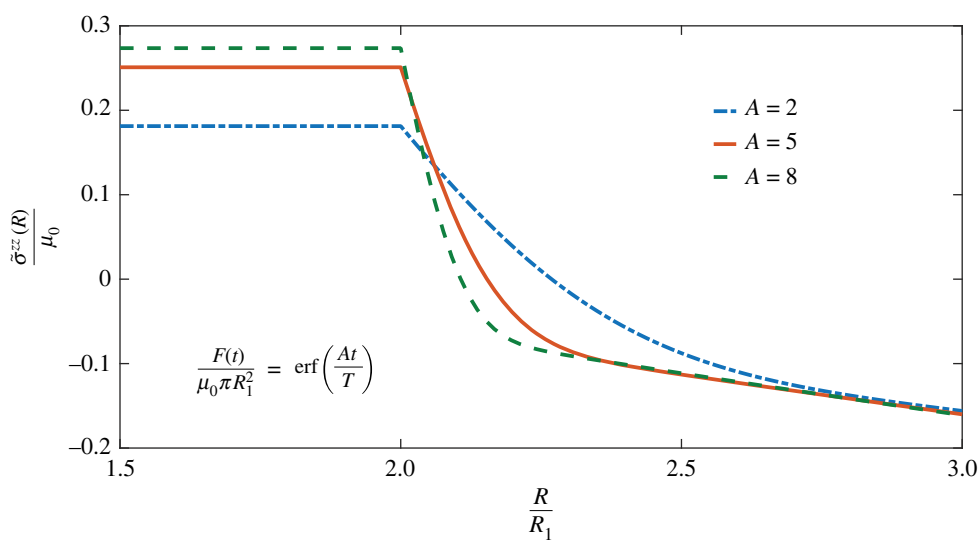


Figure 14. Residual stress $\tilde{\sigma}^{zz}(R)$ in the body (example 3.8) when it is set free after the loading $F(t) = \mu_0\pi R_1^2 \text{erf}(At/T)$, where $A \in \{2, 5, 8\}$.

$F(t)$ leaves a tensile $\tilde{\sigma}^{zz}$ in the initial portion of the final body along with a residual contraction $\tilde{\lambda}^2 < 1$. In figure 14, $\tilde{\sigma}^{zz}$ is observed to be almost the same towards the outermost accreted layers for all the three loading paths. This is probably because the load when those outermost layers were accreted was very close to the asymptotic limit of $F(t)$ in all the three cases. As a result, all those layers experience the same state of stress during loading as well as when they are set free. In figure 15, we look at the residual stress print left after different sinusoidal loading cycles and observe that $\tilde{\sigma}^{zz}$ remains zero on the outer boundary even after the bar is unloaded.

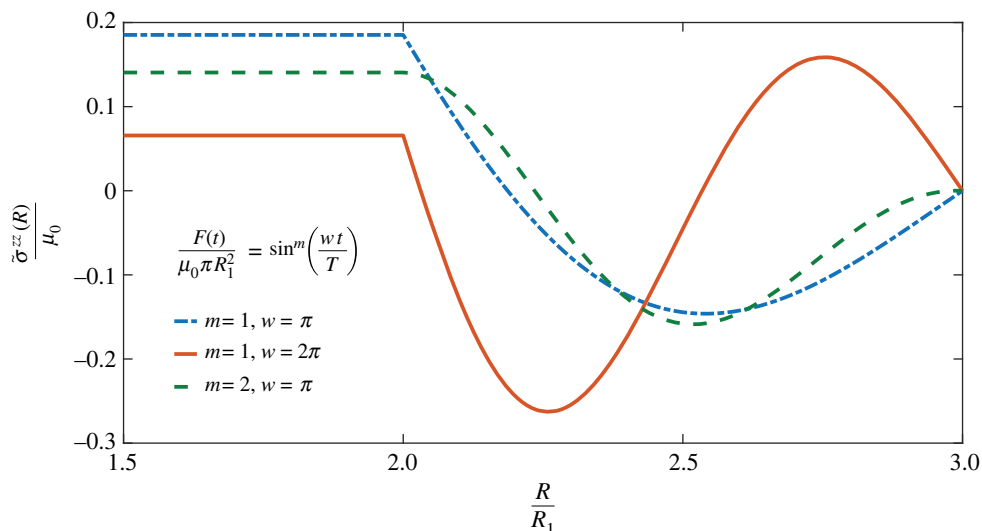


Figure 15. Residual stress $\tilde{\sigma}^{zz}(R)$ in the final body (example 3.8). During the accretion–ablation process, this body was under a sinusoidal axial force.

Table 2. Residual stretch $\tilde{\lambda}^2$ in the body when it is set free after the force-control loading described in example 3.8.

$F(t)/\mu_0\pi R_1^2$		$\tilde{\lambda}^2$
erf(At/T)	$A = 2$	1.0603
	$A = 5$	1.0835
	$A = 8$	1.0910
$a(t/T)^n$	$a = 5, n = 1$	1.2158
	$a = 5, n = 2$	1.1166
	$a = -5, n = 1$	0.8479
	$a = -5, n = 2$	0.9051
$\sin^m(\omega t/T)$	$m = 1, \omega = \pi$	1.0617
	$m = 1, \omega = 2\pi$	1.0219
	$m = 2, \omega = \pi$	1.0468

(h) Response of a three-dimensional-printed bar under axial loads

Let us assume that T_1 and T_2 are such that $0 < T < T_1 < T_2$, and consider a three-dimensional-printed thick hollow cylinder in the time interval $[0, T_2]$. Accretion/ablation occurs during the interval $[0, T]$ under some time-dependent axial load, after which the body is in an unloaded state until $t = T_1$, and service loads are applied during $[T_1, T_2]$. The motion map has the following representation:

$$\varphi_t(R, \Theta, Z) = \begin{cases} (r(R, t), \Theta, \lambda^2(t)Z), & t \leq T, \\ (\tilde{r}(R), \Theta, \tilde{\lambda}^2 Z), & T < t < T_1, \\ (r_s(R, t), \Theta, \lambda_s^2(t)\tilde{\lambda}^2 Z), & T_1 \leq t \leq T_2, \end{cases} \quad (3.96)$$

where $S_1(t) \leq R \leq S_2(t)$, and $\lambda_s^2(t)$ is the axial stretch due to the service load. The functions λ, λ_s are assumed to satisfy the following conditions: $\lambda(0) = 1, \lambda_s(T_1) = 1$. Further, notice that

$$S_1(t) = \begin{cases} R_1 + \bar{v}t, & t \leq T, \\ S_1(T), & t > T, \end{cases} \quad \text{and} \quad S_2(t) = \begin{cases} R_2 + \bar{v}t, & t \leq T, \\ S_2(T), & t > T, \end{cases} \quad (3.97)$$

so that they are invertible only in $[0, T]$, with their inverses being $\bar{\tau}$ and $\bar{\tau}^+$, respectively. Axial force and the Cauchy stress are written as

$$F(t) = \begin{cases} \mu_0 \pi R_1^2 f_1(t), & t \leq T, \\ 0, & T < t < T_1, \\ \mu_0 \pi R_1^2 f_s(t), & T_1 \leq t \leq T_2, \end{cases} \quad \sigma(R, t) = \begin{cases} \sigma_I(R, t), & t \leq T, \\ \bar{\sigma}(R), & T < t < T_1, \\ \sigma_s(R, t), & T_1 \leq t \leq T_2, \end{cases} \quad (3.98)$$

where the functions f_1, f_s are the dimensionless axial forces during the accretion–ablation process and service loading, respectively, and are assumed to satisfy the following conditions: $f_1(0) = 0, f_s(T_1) = 0$. The zZ-component of the Cauchy stress during service loading is written as

$$\sigma_s^{zz}(R, t) = \begin{cases} \lambda_s^4(t) \tilde{\lambda}^4 - \frac{1}{\lambda_s^2(t) \tilde{\lambda}^2}, & S_1(T) \leq R \leq R_2, \\ \lambda_s^4(t) \tilde{\lambda}^4 - \frac{\lambda^+}{\lambda} (R) - \frac{1}{\lambda_s^2(t) \tilde{\lambda}^2}, & R_2 \leq R \leq S_2(T), \end{cases} \quad (3.99)$$

which implies that

$$\frac{F(t)}{2\pi\mu_0} = \frac{R_2^2 - S_1^2(T)}{2} \left[\lambda_s^2(t) \tilde{\lambda}^2 - \frac{1}{\lambda_s^4(t) \tilde{\lambda}^4} \right] + \lambda_s^2(t) \tilde{\lambda}^2 \int_{R_2}^{S_2(T)} \frac{R dR}{\lambda^+ (R)} - \frac{1}{\lambda_s^4(t) \tilde{\lambda}^4} \int_{R_2}^{S_2(T)} R \lambda^+ (R) dR, \quad (3.100)$$

where $T_1 \leq t \leq T_2$. This can be rearranged as

$$\frac{F(t)}{2\pi\mu_0} = \lambda_s^2(t) \tilde{\lambda}^2 \left[\frac{R_2^2 - S_1^2(T)}{2} + \int_{R_2}^{S_2(T)} \frac{R dR}{\lambda^+ (R)} \right] - \frac{1}{\lambda_s^4(t) \tilde{\lambda}^4} \left[\frac{R_2^2 - S_1^2(T)}{2} + \int_{R_2}^{S_2(T)} R \lambda^+ (R) dR \right], \quad (3.101)$$

with

$$\tilde{\lambda}^6 = \frac{R_2^2 - S_1^2(T) + 2 \int_{R_2}^{S_2(T)} R \lambda^+ (R) dR}{R_2^2 - S_1^2(T) + 2 \int_{R_2}^{S_2(T)} \frac{R}{\lambda^+ (R)} dR}. \quad (3.102)$$

This implies the following force–stretch relationship:

$$f_s(t) = a \left[\lambda_s^2(t) - \frac{1}{\lambda_s^4(t)} \right], \quad (3.103)$$

where

$$a = \frac{1}{R_1^2} \left[R_2^2 - S_1^2(T) + 2 \int_{R_2}^{S_2(T)} R \lambda^+ (R) dR \right]^{1/3} \left[R_2^2 - S_1^2(T) + 2 \int_{R_2}^{S_2(T)} \frac{R}{\lambda^+ (R)} dR \right]^{2/3}. \quad (3.104)$$

(i) A stress-free elastic body with the same size as the three-dimensional-printed body

First observe that in the absence of accretion/ablation (i.e. $\bar{v} = \bar{v} = 0$) equation (3.100) simplifies to read

$$\frac{F(t)}{2\pi\mu_0} = \frac{R_2^2 - R_1^2}{2} \left[\lambda^2(t) - \frac{1}{\lambda^4(t)} \right]. \quad (3.105)$$

In this problem, we replace R_1 by $\tilde{r}(S_1(T))$, R_2 by $\tilde{r}(S_2(T))$, and L by $\tilde{\lambda}^2 L$. Consider a stress-free thick cylinder of inner radius $\tilde{r}(S_1(T)) = S_1(T)/\tilde{\lambda}$, outer radius $\tilde{r}(S_2(T)) = \lambda(T)S_2(T)/\tilde{\lambda}$, initial length

$\tilde{\lambda}^2 L$ and subject it to the same service load during the time interval $[T_1, T_2]$. For this new problem, let the motion be denoted as

$$\overset{\circ}{\varphi}_t(R, \Theta, Z) = (\overset{\circ}{r}_s(R, t), \Theta, \overset{\circ}{\lambda}_s^2(t)Z), \quad (3.106)$$

where $S_1(T)/\tilde{\lambda} \leq R \leq \lambda(T)s_2(T)/\tilde{\lambda}$, and $0 \leq Z \leq \tilde{\lambda}^2 L$. Let the axial force be $F_s(t) = \mu_0 \pi R_1^2 f_s(t)$, and denote the Cauchy stress by $\overset{\circ}{\sigma}_s$. For $\tilde{r}(S_1(T)) \leq \tilde{R} \leq \tilde{r}(S_2(T))$,

$$\overset{\circ}{\sigma}_s^{zz}(\tilde{R}, t) = \mu_0 \left[\overset{\circ}{\lambda}_s^4(t) - \frac{1}{\overset{\circ}{\lambda}_s^2(t)} \right], \quad (3.107)$$

which implies that the axial force can be expressed as

$$\frac{F_s(t)}{2\pi\mu_0} = \frac{\lambda^2(T)s_2^2(T) - S_1^2(T)}{2\tilde{\lambda}^2} \left[\overset{\circ}{\lambda}_s^2(t) - \frac{1}{\overset{\circ}{\lambda}_s^4(t)} \right]. \quad (3.108)$$

Thus, we have the following force–stretch relationship:

$$f_s(t) = \overset{\circ}{a} \left[\overset{\circ}{\lambda}_s^2(t) - \frac{1}{\overset{\circ}{\lambda}_s^4(t)} \right], \quad (3.109)$$

where

$$\overset{\circ}{a} = \frac{[\lambda^2(T)s_2^2(T) - S_1^2(T)] \left[R_2^2 - S_1^2(T) + 2 \int_{R_2}^{S_2(T)} R \overset{+}{\lambda}^2(R) dR \right]^{1/3}}{R_1^2 \left[R_2^2 - S_1^2(T) + 2 \int_{R_2}^{S_2(T)} \frac{R}{\overset{+}{\lambda}^4(R)} dR \right]^{1/3}}. \quad (3.110)$$

Note that if $a > \overset{\circ}{a}$, then the three-dimensional-printed body is stiffer in comparison with a stress-free body of the same dimensions, and vice versa.

Example 3.9. Consider $R_2 = 2R_1$, $\bar{v} = R_1/2T$, $\overset{+}{v} = R_1/T$, $T_1 = 2T$ and $T_2 = 3T$. Then, $t_{\text{ablation}} = 2T > T$, $S_1(T) = 1.5R_1$ and $S_2(T) = 3R_1$, where we assume the numerical values $R_1 = 1$, and $T = 1$ as in example 3.8. The values of a and $\overset{\circ}{a}$ for several loads (same as those from example 3.8) are given in table 3. The force–stretch relationship during the service loading is shown in figure 16 for two particular cases. It is observed that the three-dimensional-printed body is less stiff than a stress-free body of the same size and made of the same material provided that it was subjected to monotonic tensile loading during the accretion–ablation time interval. Similarly, a body that was under monotonic compressive loading during the accretion–ablation time interval is stiffer (in tension) than a stress-free body of the same size and made of the same material.

Example 3.10. Let $R_2 = 2R_1$, $\bar{v} = R_1/2T$, $\overset{+}{v} = R_1/T$, $T_1 = 2T$, and $T_2 = 3T$ as in example 3.9. When the service load is constant, the Cauchy stress is a function of the radial coordinate alone. We consider the time-dependent loads $f_l(t) = \pm 5t/T$ during the accretion–ablation process, and the constant service loads $f_s(t) = \pm 10$. The solid-blue curves in figure 17 represent the following sets

$$\left\{ \left(\tilde{r}(R), \frac{\overset{\circ}{\sigma}_s^{zz}(R)}{\mu_0} \right) : S_1(T) \leq R \leq S_2(T) \right\}, \quad (3.111)$$

which show the radial variation of $\overset{\circ}{\sigma}_s^{zz}$ resulting from a constant axial force applied to the three-dimensional-printed body. When a stress-free body of the same size as the three-dimensional-printed one is subjected to the same service load, it develops a constant $\overset{\circ}{\sigma}_s^{zz}$ across the cross-section (this is shown by the dashed-red curves in figure 17).

The three-dimensional-printed body manufactured under the tensile load $f_l(t) = 5t/T$ has tensile residual stress in its inner layers and compressive residual stress in the outer layers. As a result, when a tensile service load is applied, it always develops tensile stress in its inner layers

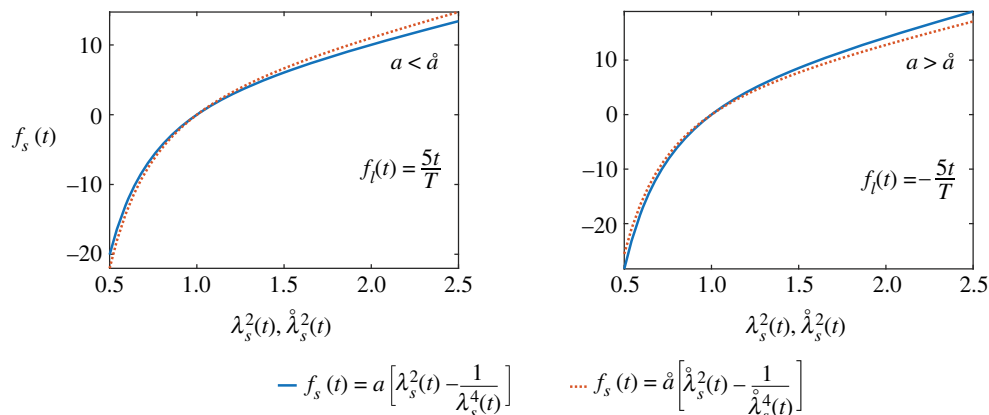


Figure 16. Force–stretch relationship for service loading (example 3.9). In the case of $f_l(t) = 5t/T$, the three-dimensional-printed body is less stiff when compared with its corresponding body without any residual stress. When $f_l(t) = -(5t/T)$, the three-dimensional-printed body is stiffer than its corresponding stress-free body of the same size.

Table 3. The coefficients of the force–stretch relations (see equations (3.103) and (3.109)) for a three-dimensional-printed bar (see (3.104)) and a stress-free bar of the same size and made of the same material (see (3.110)).

$f_l(t)$		a	$\overset{\circ}{a}$
$\text{erf}(At/T)$	$A = 2$	6.3782	6.5900
	$A = 5$	6.2486	6.5388
	$A = 8$	6.2076	6.5233
$a(t/T)^n$	$a = 5, n = 1$	5.7295	6.2902
	$a = 5, n = 2$	6.1431	6.4657
	$a = -5, n = 1$	8.0862	7.3032
	$a = -5, n = 2$	7.5304	7.0902
$\sin^m(t/T)$	$m = 1, \omega = \pi$	6.3695	6.5918
	$m = 1, \omega = 2\pi$	6.6185	6.7104
	$m = 2, \omega = \pi$	6.4570	6.6276

while the stress in the outer layers can be compressive for very small service loads. For larger loads that cause tensile σ_s^{zz} throughout the cross-section, σ_s^{zz} is greater than $\overset{\circ}{\sigma}_s^{zz}$ in the inner layers, while it is the opposite for the outer layers. If this body manufactured under the tensile load is subjected to compression, σ_s^{zz} can still be tensile in the inner layers for small enough loads. It is possible to have a slightly larger compressive service load so that the inner layers have compressive stress, but lesser than that of a stress-free body of the same size subjected to the same load, while the outer layers follow the opposite trend. However, if the compressive service load is large enough, the stresses in the three-dimensional-printed body are more compressive than those of the stress-free body throughout the cross-section.

The residual stress in the three-dimensional-printed body manufactured under the compressive load $f_l(t) = -(5t/T)$ is compressive in its inner layers and tensile in the outer layers. If tensile service loads are large enough, σ_s^{zz} in the three-dimensional-printed body is always tensile

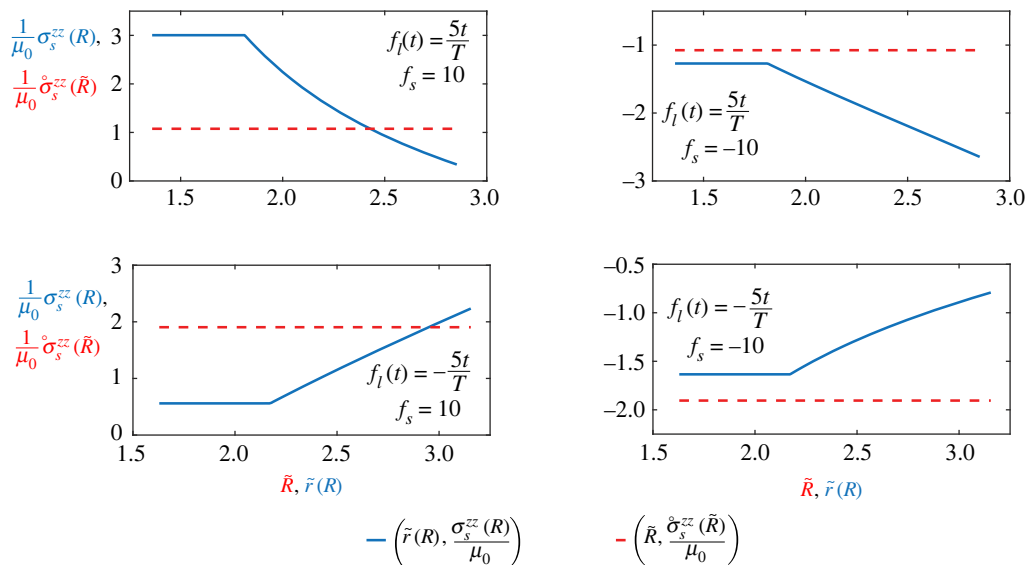


Figure 17. The z - z -component of the Cauchy stress generated by a constant service load (example 3.10). The solid-blue curves show the radial variation of the z - z -component of the Cauchy stress in the three-dimensional-printed body. The dashed-red curves represent the same for a stress-free body of the same size and made of the same material as the three-dimensional-printed one.

(with the inner layers being less stressed than the outer ones) but less stressed than the stress-free body of the same size subjected to the same service load. Similarly, if compressive service loads are large enough, σ_s^{zz} in the three-dimensional-printed body is always compressive (with the inner layers being more stressed than the outer ones) but less stressed than the stress-free body of the same size subjected to the same service load.

4. Conclusion

In this paper, we presented a geometric formulation of the nonlinear mechanics of accreting–ablating bodies. This theory models the large deformations of bodies that undergo simultaneous accretion and ablation on their boundaries. This is a generalization of the accretion theory that was formulated in [22]. In this formulation, the natural (stress-free) configuration of the body is a time-dependent Riemannian manifold. Formulating the accretion–ablation boundary-value problem requires the construction of the material metric for the accreted portion of the body. For ablation, we simply need a map to track the points on the boundary being ablated at any given time. However, we do not need to track the particles after they have left the body. The material metric is an unknown field *a priori* and is determined after solving the accretion–ablation initial-boundary-value problem. This theory is not restricted to isotropic materials; the initial body can be made of any anisotropic material. The accreting particles can be anisotropic as well. Also, the material points joining the body can be stressed at their time of attachment.

In the second part of the paper, we considered an incompressible thick hollow cylinder undergoing accretion on its outer boundary and ablation on its inner boundary while it is being loaded axially. For the sake of simplicity, we assumed a homogeneous and isotropic material both in the initial body and accreting particles. Also, to simplify kinematics we assumed that the initial body is made of an incompressible solid. It is also assumed that the material that is added to the body during the accretion process is incompressible as well. We derived the governing equations for two cases: (i) when $t < t_{\text{ablation}}$ a portion of the initial body is still present, and (ii) the initial body has been completely ablated. Assuming constant accretion and ablation velocities we solved

the problem for case (i). We considered two different loading scenarios: displacement-control and force-control loadings. In the case of displacement-control loading, we obtained a semi-analytical solution for the problem. Further, we calculated the residual stresses after the completion of the accretion–ablation processes and the removal of external forces. Given a time-dependent axial stretch during loading, we provided analytical expressions for both the residual stretch and axial residual stress.

A future extension of this work would be to study problems where the accretion and ablation velocities are dictated by mass transport and heat transfer. Studying large elastic deformations in accretion–ablation problems coupled with phase changes will be the subject of a future communication.

Data accessibility. This article has no additional data.

Declaration of AI use. We have not used AI-assisted technologies in creating this article.

Authors' contributions. S.P.P.: formal analysis, investigation, writing—original draft, writing—review and editing; A.Y.: conceptualization, funding acquisition, investigation, project administration, supervision, writing—original draft, writing—review and editing.

Both authors gave final approval for publication and agreed to be held accountable for the work performed therein.

Conflict of interest declaration. We declare we have no competing interests.

Funding. This research was partially supported by NSF (grant no. CMMI 1939901), and ARO (grant no. W911NF-18-1-0003).

Appendix A. The relationship between $r(R, t)$ and $\lambda(t)$ for an accreting–abating incompressible thick hollow cylinder under finite extension

The traction continuity equation (3.57) can be rearranged as follows:

$$\int_{S_1(t)}^{R_2} \left[\frac{1}{R} - \frac{R^3}{r^4(R, t)\lambda^4(t)} \right] dR + \int_{R_2}^{S_2(t)} \frac{\lambda^2(R)}{r(R)} \left[1 - \frac{r^4(R)\lambda^4(R)}{r^4(R, t)\lambda^4(t)} \right] dR = 0. \quad (\text{A } 1)$$

For the sake of convenience, let us denote

$$A(t) := \int_{S_1(t)}^{R_2} \left[\frac{1}{R} - \frac{R^3}{r^4(R, t)\lambda^4(t)} \right] dR \quad \text{and} \quad B(t) := \int_{R_2}^{S_2(t)} \frac{\lambda^2(R)}{r(R)} \left[1 - \frac{r^4(R)\lambda^4(R)}{r^4(R, t)\lambda^4(t)} \right] dR = 0. \quad (\text{A } 2)$$

Observe that (3.11) and (3.21) can be combined to write

$$r^2(R, t)\lambda^2(t) = \begin{cases} s_1^2(t)\lambda^2(t) - S_1^2(t) + R^2, & R \leq R_2, \\ s_1^2(t)\lambda^2(t) - S_1^2(t) + R_2^2 + 2 \int_{R_2}^R \frac{\lambda^2(\zeta)}{r(\zeta)} d\zeta, & R \geq R_2. \end{cases} \quad (\text{A } 3)$$

Let us define the following two functions:

$$\chi(t) := s_1^2(t)\lambda^2(t) - S_1^2(t), \quad \psi(R) := \begin{cases} R^2, & R \leq R_2, \\ R_2^2 + 2 \int_{R_2}^R \frac{\lambda^2(\zeta)}{r(\zeta)} d\zeta, & R \geq R_2, \end{cases} \quad (\text{A } 4)$$

so that $r^2(R, t)\lambda^2(t) = \chi(t) + \psi(R)$. Further,

$$\psi'(R) = \begin{cases} 2R, & R \leq R_2, \\ 2 \frac{\lambda^2(R)}{r(R)}, & R \geq R_2. \end{cases} \quad (\text{A } 5)$$

Now, one can write

$$\begin{aligned}\dot{A}(t) &= \int_{S_1(t)}^{R_2} \frac{\partial}{\partial t} \left[\frac{1}{R} - \frac{R^3}{r^4(R, t)\lambda^4(t)} \right] dR - \left[\frac{1}{S_1(t)} - \frac{S_1^3(t)}{r^4(S_1(t), t)\lambda^4(t)} \right] \dot{S}_1(t) \\ &= - \int_{S_1(t)}^{R_2} \frac{\partial}{\partial t} \left[\frac{R^3}{[\chi(t) + \psi(R)]^2} \right] dR - \bar{v} \left[\frac{1}{S_1(t)} - \frac{S_1^3(t)}{s_1^4(t)\lambda^4(t)} \right] \\ &= \int_{S_1(t)}^{R_2} \frac{2\dot{\chi}(t)R^3}{[\chi(t) + \psi(R)]^3} dR - \bar{v} \left[\frac{1}{S_1(t)} - \frac{S_1^3(t)}{s_1^4(t)\lambda^4(t)} \right] \\ &= \frac{\dot{\chi}(t)}{4} \int_{S_1(t)}^{R_2} \frac{[\psi'(R)]^3 dR}{[\chi(t) + \psi(R)]^3} - \bar{v} \left[\frac{1}{S_1(t)} - \frac{S_1^3(t)}{s_1^4(t)\lambda^4(t)} \right],\end{aligned}\quad (\text{A } 6)$$

and

$$\begin{aligned}\dot{B}(t) &= - \int_{R_2}^{S_2(t)} \frac{\partial}{\partial t} \left[\frac{r^3(R) \lambda^6(R)}{r^4(R, t)\lambda^4(t)} \right] dR + \frac{\lambda^2(S_2(t))}{r(S_2(t))} \left[1 - \frac{\lambda^4(S_2(t)) \lambda^4(S_2(t))}{r^4(S_2(t), t)\lambda^4(t)} \right] \dot{S}_2(t) \\ &= - \int_{R_2}^{S_2(t)} \frac{\partial}{\partial t} \left[\frac{r^3(R) \lambda^6(R)}{[\chi(t) + \psi(R)]^2} \right] dR \\ &= \int_{R_2}^{S_2(t)} \frac{2\dot{\chi}(t) r^3(R) \lambda^6(R)}{[\chi(t) + \psi(R)]^3} dR \\ &= \frac{\dot{\chi}(t)}{4} \int_{R_2}^{S_2(t)} \frac{[\psi'(R)]^3 dR}{[\chi(t) + \psi(R)]^3}.\end{aligned}\quad (\text{A } 7)$$

Differentiating (A 1) with respect to time and using (A 6) and (A 7) one obtains

$$\frac{\dot{\chi}(t)}{4} \int_{S_1(t)}^{S_2(t)} \frac{[\psi'(R)]^3 dR}{[\chi(t) + \psi(R)]^3} = \bar{v} \left[\frac{1}{S_1(t)} - \frac{S_1^3(t)}{s_1^4(t)\lambda^4(t)} \right].\quad (\text{A } 8)$$

Note that

$$\frac{1}{S_1(t)} - \frac{S_1^3(t)}{s_1^4(t)\lambda^4(t)} = \frac{\chi(t) [\chi(t) + 2S_1^2(t)]}{S_1(t) [\chi(t) + S_1^2(t)]^2},\quad (\text{A } 9)$$

and hence

$$\frac{\dot{\chi}(t)}{4} \int_{S_1(t)}^{S_2(t)} \frac{[\psi'(R)]^3 dR}{[\chi(t) + \psi(R)]^3} = \frac{\bar{v} \chi(t) [\chi(t) + 2S_1^2(t)]}{S_1(t) [\chi(t) + S_1^2(t)]^2}.\quad (\text{A } 10)$$

Let us define

$$\gamma(t) := - \int_0^t \frac{4 \bar{v} [\chi(\tau) + 2S_1^2(\tau)] d\tau}{S_1(\tau) [\chi(\tau) + S_1^2(\tau)]^2 \int_{S_1(\tau)}^{S_2(\tau)} \frac{[\psi'(R)]^3}{[\chi(\tau) + \psi(R)]^3} dR}.\quad (\text{A } 11)$$

Thus, we have

$$\dot{\chi}(t) + \dot{\gamma}(t)\chi(t) = 0, \quad \text{or} \quad \frac{d}{dt} [e^{\gamma(t)} \chi(t)] = 0.\quad (\text{A } 12)$$

Integrating this ODE, one obtains

$$e^{\gamma(t)} \chi(t) = e^{\gamma(0)} \chi(0).\quad (\text{A } 13)$$

Now since $\gamma(0) = 0$, and $\chi(0) = 0$ (as $s_1(0) = S_1(0) = R_1$ and $\lambda(0) = 1$), we conclude that $\chi(t) = 0$, i.e. $s_1^2(t)\lambda^2(t) = S_1^2(t)$ for all $t < t_{\text{ablation}}$. Thus,

$$r^2(R, t)\lambda^2(t) = \begin{cases} R^2, & R \leq R_2, \\ R_2^2 + 2 \int_{R_2}^R \frac{\lambda^2(\zeta)}{r(\zeta)} d\zeta, & R \geq R_2, \end{cases}\quad (\text{A } 14)$$

is independent of time. Further, substituting $t = \overset{+}{r}(R)$ one obtains

$$\overset{+2}{r}(R) \overset{+2}{\lambda}(R) = R_2^2 + 2 \int_{R_2}^R \overset{+}{\lambda}(\zeta) \overset{+}{r}(\zeta) d\zeta, \quad (\text{A } 15)$$

which when differentiated with respect to R gives

$$\frac{d}{dR} [\overset{+}{r}(R) \overset{+}{\lambda}(R)] = \overset{+}{\lambda}(R). \quad (\text{A } 16)$$

Integrating this along with $\overset{+}{r}(R_2) = R_2$, we finally obtain

$$\overset{+}{r}(R) = \frac{R_2 + \int_{R_2}^R \overset{+}{\lambda}(\xi) d\xi}{\overset{+}{\lambda}(R)}, \quad (\text{A } 17)$$

and hence

$$r(R, t) = \begin{cases} \frac{R}{\lambda(t)}, & S_1(t) \leq R \leq R_2, \\ \frac{\overset{+}{r}(R) \overset{+}{r}(R)}{\lambda(t)}, & R_2 \leq R \leq S_2(t). \end{cases} \quad (\text{A } 18)$$

References

1. Southwell R. 1941 *Introduction to the theory of elasticity for engineers and physicists*. Oxford, UK: Oxford University Press.
2. Brown C, Goodman L. 1963 Gravitational stresses in accreted bodies. *Proc. R. Soc. Lond. A* **276**, 571–576. (doi:10.1098/rspa.1963.0227)
3. Skalak R, Dasgupta G, Moss M, Otten E, Dullemeijer P, Vilmann H. 1982 Analytical description of growth. *J. Theor. Biol.* **94**, 555–577. (doi:10.1016/0022-5193(82)90301-0)
4. Skalak R, Farrow D, Hoger A. 1997 Kinematics of surface growth. *J. Math. Biol.* **35**, 869–907. (doi:10.1007/s002850050081)
5. Metlov V. 1985 On the accretion of inhomogeneous viscoelastic bodies under finite deformations. *J. Appl. Math. Mech.* **49**, 490–498. (doi:10.1016/0021-8928(85)90056-5)
6. Abi-Akl R, Cohen T. 2020 Surface growth on a deformable spherical substrate. *Mech. Res. Commun.* **103**, 103457. (doi:10.1016/j.mechrescom.2019.103457)
7. Abi-Akl R, Abeyaratne R, Cohen T. 2019 Kinetics of surface growth with coupled diffusion and the emergence of a universal growth path. *Proc. R. Soc. A* **475**, 20180465. (doi:10.1098/rspa.2018.0465)
8. Arutyunyan NK, Naumov V, Radaev YN. 1990 A mathematical model of a dynamically accreted deformable body. Part 1: kinematics and measure of deformation of the growing body. *Mech. Solids* **25**, 86–99.
9. Bergel GL, Papadopoulos P. 2021 A finite element method for modeling surface growth and resorption of deformable solids. *Comput. Mech.* **68**, 759–774. (doi:10.1007/s00466-021-02044-y)
10. Drozdov AD. 1998 Continuous accretion of a composite cylinder. *Acta Mech.* **128**, 117–135. (doi:10.1007/BF01463163)
11. Drozdov AD. 1998 *Viscoelastic structures: mechanics of growth and aging*. New York, NY: Academic Press.
12. Hodge N, Papadopoulos P. 2010 A continuum theory of surface growth. *Proc. R. Soc. A* **466**, 3135–3152. (doi:10.1098/rspa.2010.0061)
13. Kadish J, Barber J, Washabaugh P. 2005 Stresses in rotating spheres grown by accretion. *Int. J. Solids Struct.* **42**, 5322–5334. (doi:10.1016/j.ijsolstr.2004.11.009)
14. Lychev S. 2011 Universal deformations of growing solids. *Mech. Solids* **46**, 863–876. (doi:10.3103/S0025654411060069)
15. Lychev S, Manzhairov A. 2013 The mathematical theory of growing bodies. Finite deformations. *J. Appl. Math. Mech.* **77**, 421–432. (doi:10.1016/j.jappmathmech.2013.11.011)
16. Lychev S, Manzhairov A. 2013 Reference configurations of growing bodies. *Mech. Solids* **48**, 553–560. (doi:10.3103/S0025654413050117)

17. Lychev S, Koifman K, Djuzhev N. 2021 Incompatible deformations in additively fabricated solids: discrete and continuous approaches. *Symmetry* **13**, 2331. (doi:10.3390/sym13122331)
18. Manzhirrov A. 1995 The general non-inertial initial-boundaryvalue problem for a viscoelastic ageing solid with piecewise-continuous accretion. *J. Appl. Math. Mech.* **59**, 805–816. (doi:10.1016/0021-8928(95)00095-X)
19. Manzhirrov AV. 2014 Mechanics of growing solids: New track in mechanical engineering. In *ASME 2014 Int. Mechanical Engineering Congress and Exposition, Montreal, Quebec, Canada, 14–20 November*, pp. V009T12A039. American Society of Mechanical Engineers.
20. Ong JJ, O'Reilly OM. 2004 On the equations of motion for rigid bodies with surface growth. *Int. J. Eng. Sci.* **42**, 2159–2174. (doi:10.1016/j.ijengsci.2004.07.010)
21. Sozio F, Yavari A. 2017 Nonlinear mechanics of surface growth for cylindrical and spherical elastic bodies. *J. Mech. Phys. Solids* **98**, 12–48. (doi:10.1016/j.jmps.2016.08.012)
22. Sozio F, Yavari A. 2019 Nonlinear mechanics of accretion. *J. Nonlinear Sci.* **29**, 1813–1863. (doi:10.1007/s00332-019-09531-w)
23. Sozio F, Faghih Shojaei M, Sadik S, Yavari A. 2020 Nonlinear mechanics of thermoelastic accretion. *Z. Angew. Math. Phys.* **71**, 1–24. (doi:10.1007/s00033-020-01309-5)
24. Tomassetti G, Cohen T, Abeyaratne R. 2016 Steady accretion of an elastic body on a hard spherical surface and the notion of a four-dimensional reference space. *J. Mech. Phys. Solids* **96**, 333–352. (doi:10.1016/j.jmps.2016.05.015)
25. Truskinovsky L, Zurlo G. 2019 Nonlinear elasticity of incompatible surface growth. *Phys. Rev. E* **99**, 053001. (doi:10.1103/PhysRevE.99.053001)
26. Yavari A, Safa Y, Soleiman Fallah A. 2023 Finite extension of accreting nonlinear elastic solid circular cylinders. *Continuum Mech. Thermodyn.* 1–17.
27. Zurlo G, Truskinovsky L. 2017 Printing non-Euclidean solids. *Phys. Rev. Lett.* **119**, 048001. (doi:10.1103/PhysRevLett.119.048001)
28. Zurlo G, Truskinovsky L. 2018 Inelastic surface growth. *Mech. Res. Commun.* **93**, 174–179. (doi:10.1016/j.mechrescom.2018.01.007)
29. Naumov VE. 1994 Mechanics of growing deformable solids: a review. *J. Eng. Mech.* **120**, 207–220. (doi:10.1061/(ASCE)0733-9399(1994)120:2(207))
30. Eckart C. 1948 The thermodynamics of irreversible processes. IV. The theory of elasticity and anelasticity. *Phys. Rev.* **73**, 373–382. (doi:10.1103/PhysRev.73.373)
31. Ozakin A, Yavari A. 2010 A geometric theory of thermal stresses. *J. Math. Phys.* **51**, 032902. (doi:10.1063/1.3313537)
32. Sadik S, Yavari A. 2017 Geometric nonlinear thermoelasticity and the time evolution of thermal stresses. *Math. Mech. Solids* **22**, 1546–1587. (doi:10.1177/1081286515599458)
33. Stojanovic R, Djuric S, Vujosevic L. 1964 On finite thermal deformations. *Archiwum Mechaniki Stosowanej* **16**, 103–108.
34. Golgoon A, Yavari A. 2018 Line and point defects in nonlinear anisotropic solids. *Z. Angew. Math. Phys.* **69**, 81. (doi:10.1007/s00033-018-0973-2)
35. Sadik S, Angoshtari A, Goriely A, Yavari A. 2016 A geometric theory of nonlinear morphoelastic shells. *J. Nonlinear Sci.* **26**, 929–978. (doi:10.1007/s00332-016-9294-9)
36. Yavari A, Goriely A. 2012 Riemann–Cartan geometry of nonlinear dislocation mechanics. *Arch. Ration. Mech. Anal.* **205**, 59–118. (doi:10.1007/s00205-012-0500-0)
37. Yavari A, Goriely A. 2012 Weyl geometry and the nonlinear mechanics of distributed point defects. *Proc. R. Soc. A* **468**, 3902–3922. (doi:10.1098/rspa.2012.0342)
38. Yavari A, Goriely A. 2012 Riemann–Cartan geometry of nonlinear disclination mechanics. *Math. Mech. Solids* **18**, 91–102. (doi:10.1177/1081286511436137)
39. Yavari A, Goriely A. 2014 The geometry of discombinations and its applications to semi-inverse problems in anelasticity. *Proc. R. Soc. A* **470**, 20140403. (doi:10.1098/rspa.2014.0403)
40. Goriely A, Moulton DE, Vandiver R. 2010 Elastic cavitation, tube hollowing, and differential growth in plants and biological tissues. *Europhys. Lett.* **91**, 18001. (doi:10.1209/0295-5075/91/18001)
41. Moulton DE, Goriely A. 2011 Anticavitation and differential growth in elastic shells. *J. Elast.* **102**, 117–132. (doi:10.1007/s10659-010-9266-5)
42. Pence TJ, Tsai H. 2005 Swelling-induced microchannel formation in nonlinear elasticity. *IMA J. Appl. Math.* **70**, 173–189. (doi:10.1093/imamat/hxh049)
43. Pence TJ, Tsai H. 2006 Swelling-induced cavitation of elastic spheres. *Math. Mech. Solids* **11**, 527–551. (doi:10.1177/1081286504046481)

44. Pence TJ, Tsai H. 2007 Bulk cavitation and the possibility of localized interface deformation due to surface layer swelling. *J. Elast.* **87**, 161–185. (doi:10.1007/s10659-007-9102-8)
45. Amar MB, Goriely A. 2005 Growth and instability in elastic tissues. *J. Mech. Phys. Solids* **53**, 2284–2319. (doi:10.1016/j.jmps.2005.04.008)
46. Epstein M, Maugin GA. 2000 Thermomechanics of volumetric growth in uniform bodies. *Int. J. Plast.* **16**, 951–978. (doi:10.1016/S0749-6419(99)00081-9)
47. Goriely A. 2017 *The mathematics and mechanics of biological growth*. New York, NY: Springer.
48. Yavari A. 2010 A geometric theory of growth mechanics. *J. Nonlinear Sci.* **20**, 781–830. (doi:10.1007/s00332-010-9073-y)
49. Sadik S, Yavari A. 2017 On the origins of the idea of the multiplicative decomposition of the deformation gradient. *Math. Mech. Solids* **22**, 771–772. (doi:10.1177/1081286515612280)
50. Yavari A, Sozio F. 2023 On the direct and reverse multiplicative decompositions of deformation gradient in nonlinear anisotropic anelasticity. *J. Mech. Phys. Solids* **170**, 105101. (doi:10.1016/j.jmps.2022.105101)
51. Goodbrake C, Goriely A, Yavari A. 2021 The mathematical foundations of anelasticity: existence of smooth global intermediate configurations. *Proc. R. Soc. A* **477**, 20200462. (doi:10.1098/rspa.2020.0462)
52. Kondo K. 1949 A proposal of a new theory concerning the yielding of materials based on Riemannian geometry. *J. Jpn Soc. Aeronaut. Eng.* **2**, 29–31. (doi:10.2322/jjsass1948.2.29)
53. Kondo K. 1950 On the dislocation, the group of holonomy and the theory of yielding. *J. Soc. Appl. Mech. Jpn* **3**, 107–110. (doi:10.2322/jjsass1948.3.107)
54. Sozio F, Yavari A. 2020 Riemannian and Euclidean material structures in anelasticity. *Math. Mech. Solids* **25**, 1267–1293. (doi:10.1177/1081286519884719)
55. Poincaré H. 1905 *Science and hypothesis*. New York, NY: The Walter Scott Publishing Company.
56. Efrati E, Sharon E, Kupferman R. 2009 Elastic theory of unconstrained non-Euclidean plates. *J. Mech. Phys. Solids* **57**, 762–775. (doi:10.1016/j.jmps.2008.12.004)
57. Naghibzadeh SK, Walkington N, Dayal K. 2022 Accretion and ablation in deformable solids with an eulerian description: examples using the method of characteristics. *Math. Mech. Solids* **27**, 989–1010. (doi:10.1177/10812865211054573)
58. Papadopoulos P, Hodge N. 2010 On surface growth of actin networks. *Int. J. Eng. Sci.* **48**, 1498–1506. (doi:10.1016/j.ijengsci.2010.09.015)
59. Yavari A, Pradhan SP. 2022 Accretion mechanics of nonlinear elastic circular cylindrical bars under finite torsion. *J. Elast.* **152**, 1–32. (doi:10.1007/s10659-022-09957-6)
60. Ericksen JL. 1954 Deformations possible in every isotropic, incompressible, perfectly elastic body. *Z. Angew. Math. Phys.* **5**, 466–489. (doi:10.1007/BF01601214)
61. Marsden J, Hughes T. 1983 *Mathematical foundations of elasticity*. New York, NY: Dover.
62. Ogden RW. 1984 *Non-linear elastic deformations*. Mineola, NY: Dover.
63. Doyle TC, Ericksen JL. 1956 Nonlinear elasticity. *Adv. Appl. Mech.* **4**, 53–115. (doi:10.1016/S0065-2156(08)70371-5)
64. Simo J, Marsden J. 1984 Stress tensors, Riemannian metrics and the alternative descriptions in elasticity. In *Trends and applications of pure mathematics to mechanics* (eds GC Ciarlet, M Roseau), pp. 369–383. Berlin, Germany: Springer.